

Workshop Manual
Audi A4 2015 ➤ , Audi A4 Avant 2015 ➤ ,
Audi A5 2016 ➤ , Audi A6 2011 ➤ ,

Audi A6 China 2012 ➤ , Audi Q5 2017 ➤

Servicing 6-speed manual gearbox 0CS, 0DJ, 0CX

Edition 10.2017





List of Workshop Manual Repair Groups

Repair Group

- 00 Technical data
- 30 Clutch
- 34 Controls, housing
- 35 Gears, shafts
- 39 Final drive differential



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Technical information should always be available to the foremen and mechanics, because their careful and constant adherence to the instructions is essential to ensure vehicle road-worthiness and safety. In addition, the normal basic safety precautions for working on motor vehicles must, as a matter of course, be observed.

All rights reserved.

No reproduction without prior agreement from publisher.



Contents

00 -	Techi	nical data	1
	1	Identification	1
	1.1	Gearbox identification	1
	1.2	Identification - four-wheel drive coupling 0CJ or 0CX	3
	2	Repair instructions	5
	2.1	General repair instructions	5
	3	Technical data	13
	3.1	Allocation of gearbox to engine	13
	3.2	Capacities	13
	4	Transmission layout	15
	4.1	Transmission layout - front-wheel drive	15
Ų	4.2	Transmission layout - four-wheel drive	16
30 -	Clutcl	h	18
00	1	Clutch mechanism	18
	1.1	Exploded view - clutch release mechanism	18
	1.2	Removing and installing clutch slave cylinder together with release bearing	19
	2 2.1	Clutch	21 21
		General notes on clutch	
Protecte	d by copyri	Exploded view - clutch unit ght. Copying for private or commercial purposes, in part or in whole, is not utRemoving and installing clutch module pt any liability	24 30
with i	ed∡unuess au reappept to th	Removing and installing coutch opvright by AUDI AG.	35
	2.5	Resetting adjuster ring in SAC pressure plate	43
	2.6	Renewing needle bearing for dual-mass flywheel	46
34 -	Contr	ols, housing	50
	1	Transporting gearbox	50
	2	Dismantling and assembling gearbox	51
	2.1	Schematic overview - gearbox	51
	2.2	Exploded view - gearbox	52
	2.3	Exploded view - gear cluster, reverse gear wheel, selector mechanism	58
	2.4	Exploded view - selector forks	60
	2.5	Dismantling and assembling gearbox	61
	2.6	Removing and installing selector shaft	89
	3	Gearbox housing, clutch housing	92
	3.1	Exploded view - gearbox housing	92
	3.2	Exploded view - gearbox housing cover	94
	3.3	Servicing gearbox housing	96
	3.4	Servicing gearbox housing cover	103
	4	Securing to engine and gearbox support	116
	5	Gear oil circuit	118
	5.1	Overview - gear oil circuit	
	5.2	Exploded view - gear oil pump	119
	5.3	Removing and installing gear oil pump	120
35	Gear	s, shafts	122
55 -			
	1	Dismantling and assembling gears and shafts	
	1.1	Exploded view - gear cluster	
	1.2	Dismantling and assembling gear cluster	
	2	Input shaft	
	2.1	Exploded view - input shaft	133

	2.2	Dismantling and assembling input shaft	137
	2.3	Allocation of 3rd - 6th gear synchro-rings to locking collars	144
	2.4	Checking 3rd - 6th gear synchro-rings for wear	145
	3	Output shaft	147
	3.1	Exploded view - output shaft	
	3.2	Dismantling and assembling output shaft	
39 -	Final	drive - differential	154
	1	Oil seals	154
	1.1	Overview of fitting locations - oil seals Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not Renewing oil seal (left side) at by AUDI AG. AUDI AG does not guarantee or accept any liability	154
	1.2	Renewing oil seal (lett-side) ed by AUDI AG. AUDI AG does not guarantee or accept any liability	158
	1.3	Renewing oil Seal (right side) these of information in this document. Copyright by AUDI AG.	162
	1.4	Renewing input shaft oil seal	163
	1.5	Renewing sealing cap for output shaft in gearbox housing	165
	1.6	Renewing output shaft oil seal	166
	2	Final drive	169
	2.1	Exploded view - final drive	
	2.2	Exploded view - pinion shaft	171
	2.3	Removing and installing pinion shaft	172
	2.4	Dismantling and assembling pinion shaft	174
	2.5	Table of adjustments - final drive	
	2.6	Adjusting pinion shaft	
	2.7	Adjusting final drive	
	2.8	Renewing cover for final drive	203
	3	Differential	210
	3.1	Exploded view - differential	
	3.2	Removing and installing differential	211
	3.3	Dismantling and assembling differential	213
	3.4	Removing and installing flange shaft (left-side)	219
	3.5	Removing and installing flange shaft (right-side)	223
	3.6	Renewing mounting bracket and ball bearing for flange shaft (left-side)	225
	4	Four-wheel drive coupling	228
	4.1	Exploded view - four-wheel drive coupling	228
	4.2	Removing and installing four-wheel drive coupling	229

00 – Technical data

Identification

(ARL005491; Edition 10.2017)

⇒ "1.1 Gearbox identification", page 1

⇒ "1.2 Identification - four-wheel drive coupling 0CJ or 0CX", page

1.1 Gearbox identification

⇒ "1.1.1 Gearbox identification - manual gearbox 0CS and 0DJ, front-wheel drive", page 1

⇒ "1.1.2 Gearbox identification - manual gearbox 0CX, four-wheel drive", page 2

1. Author by conGearbox identification -- manual gearbox with respect OCS, and ODJ, at front-wheel drive, audi ag.



Note


- From approx. 09/2016 onwards, manual gearboxes 0CS and ODJ, front-wheel drive are fitted with a forced lubrication system.
- ♦ The gear wheels and bearings on these gearboxes are lubricated via a mechanical oil pump fitted in the gearbox.
- Visible differences ⇒ page 1
- ♦ Allocate according to gearbox code ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 00; Technical data; Allocation of gearbox to engine .


Differentiation of manual gearbox 0CS, 0DJ with and without forced lubrication

- I Manual gearbox without forced lubrication
- ♦ Oil drain plug -arrow A- is located in gearbox housing
- II Manual gearbox with forced lubrication
- Oil drain plug -arrow B- is located in gearbox cover
- Additional opening in gearbox housing with sealing plug -arrow C-

Location on gearbox

- Arrow A- Manual gearbox 0CS or 0DJ ⇒ page 2
- Arrow B- Code letters and production date ⇒ page 2





Manual gearbox 0CS or 0DJ -arrow-

- The part number for the gearbox housing (0CS 301 103 in the example) may start with "0CS" or "0DJ".
- The basic design of manual gearboxes 0CS and 0DJ is the same.

Difference:

- Gearbox 0CS does not have weight-optimising modifications.
- Gearbox 0DJ has weight-optimising modifications.
- They can only be distinguished by referring to the gearbox code letters ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 00; Technical data; Allocation of gearbox to engine.


Code letters -arrow A- and production date of gearbox -arrow B-

Example:	QJY	15 03 13
	Code letters	Production date: 15.03,2013



Note


- Additional data depend on manufacture.
- The code letters for the gearbox are also given on the vehicle data stickers.






Note


- All manual gearboxes OCX, four-wheel drive, are fitted with a forced lubrication system.
- The gear wheels and bearings on these gearboxes are lubricated via a mechanical oil pump fitted in the gearbox.
- For allocation of gearbox to engine and code, refer to ⇒ 6speed manual gearbox OCS, ODJ, OCX; Rep. gr. 00; Technical data .





Location on gearbox

- Arrow A- Code letters and production date ⇒ page 3
- -Arrow B- manual gearbox 0CX
- -Arrow C- four-wheel drive coupling 0CJ or 0CX ⇒ "1.2 Identification - four-wheel drive coupling 0CJ or 0CX". page 3



Protected by copyright. Copyi permitted unless authorised by with respect to the correct

Code letters -arrow A- and production date of gearbox -arrow B-

Example:	RJS	15 06 16
	Code letters	Production date: 15.06.2016



Note


- Additional data depend on manufacture.
- The code letters for the gearbox are also given on the vehicle data stickers.

1.2 Identification - four-wheel drive coupling 0CJ or 0CX



Note

- There are two versions of the four-wheel drive coupling. As they look identical, they can only be distinguished from each other by the part number.
- ♦ Four-wheel drive coupling 0CJ can transfer up to 800 Nm.
- Four-wheel drive coupling OCX can transfer up to 1200 Nm.
- For extensive information on how to perform the repair, refer to ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling.



Location on four-wheel drive coupling 0CJ or 0CX

◆ -Arrow A- Production date

Example: 08.09.2016

◆ -Arrow B- Type of four-wheel drive coupling

Example: 0CJ 236


◆ -Arrow C- Coupling classification

Example: 4028.07

♦ -Arrow D- Serial number

Example: 89G1007

◆ -Arrow E- Part number Example: 0CJ.409.431.B





2 Repair instructions

⇒ "2.1 General repair instructions", page 5

2.1 General repair instructions

Proper tools and the maximum possible care and cleanliness are essential for satisfactory repairs to the transmission units. The usual basic safety precautions also naturally apply when carrying out repair work.

To avoid repetition, a number of generally applicable instructions for the various repair procedures are summarised here. They apply to the work described in this Manual.

Special tools

For a complete list of special tools used in this Workshop Manual ⇒ Workshop equipment and special tools catalogue.

- From approx. 09/2016 onwards, manual gearboxes 0CS and 0DJ, front-wheel drive are fitted with a forced lubrication sys-
- Identification ⇒ page 1
- The gear wheels and bearings on these gearboxes are lubricated via a mechanical oil pump fitted in the gearbox.



Caution

After gearbox repairs have been performed, the gear wheels may be insufficiently lubricated as air bubbles may have formed in the oil circuit.


- To ensure that all gear wheels are supplied with enough gear oil on gearboxes with forced lubrication, these vehicles must only be driven at very low throttle for the first 30 seconds.
- Manual gearbox 0CX, four-wheel drive, is always fitted with a forced lubrication system.
- The replacement manual gearbox 0CX, four-wheel drive, is always offered without four-wheel drive coupling.
- When exchanging or repairing the manual gearbox, check the oil level and fill up with oil if necessary ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Gear oil; Checking gearnt. Copying for private or commercial purposes, in part or in whole, is not oil level .

permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

- Code letters and technical data ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 00; Technical data
- Capacities and specifications ⇒ "3 Technical data", page 13.
- Allocate bolts and other components according to gearbox code letters, refer to ⇒ Electronic parts catalogue.
- Thoroughly clean all joints and connections and the surrounding areas before disconnecting.

Four-wheel drive coupling "quattro ultra"

- ♦ For extensive information on how to repair the four-wheel drive coupling -1-, refer to ⇒ Rear final drive; Rep. gr. 39; Fourwheel drive coupling .
- The four-wheel drive coupling has its own oil supply.
- When exchanging or repairing the four-wheel drive coupling, check the ATF level and add ATF if necessary ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Checking fluid level .
- Removing and installing four-wheel drive coupling ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Removing and installing four-wheel drive coupling .
- Removing and installing all-wheel drive control unit J492- ⇒ Rear final drive; Rep. gr. 39 : Four-wheel drive coupling; Removing an period and the property of the prope with respect to the correctness of information in this document. Copyright by AUDI AG.




"Clacking" sound in LuK version dual-mass flywheel with centrifugal pendulum absorber


- Depending on version, clutch modules -A- with or without centrifugal pendulum absorbers may be fitted.
- When a clutch module with a centrifugal pendulum absorber is turned by hand, a clacking sound can be heard at intervals of approx. 90°.
- This is caused by a centrifugal pendulum absorber in the dualmass flywheel and is not a fault.

Sealant

- Thoroughly clean housing contact surfaces before applying sealing paste.
- Apply sealing paste (⇒ Electronic parts catalogue) evenly and not too thickly.
- Breather holes must remain free of sealing paste.

O-rings, seals, oil seals and gaskets










- Always renew O-rings, seals, oil seals and gaskets after removal.
- The seals for the flange shafts, input shaft and selector shaft are normally referred to as oil seals.
- After removing gaskets and oil seals, always inspect the contact surface on the housing or shaft for burrs resulting from removal or for other signs of damage.
- Thoroughly clean housing joint surfaces before assembling.
- Before installing oil seals, lightly oil the outer circumference of the seal and fill the space between the sealing lips -arrowabout half full with grease ⇒ Electronic parts catalogue.
- The open side of the oil seal should face the side containing the fluid.
- When installing a new oil seal, position the seal such that the sealing lip does not contact the shaft in the same place as the old seal (make use of installation depth tolerances).
- Lightly lubricate O-rings before installation to prevent them from being trapped and damaged during assembly.
- After renewing oil seals and gaskets, check and, if necessary, top up oil level in gearbox ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Gear oil; Checking gear oil level .


Locking elements





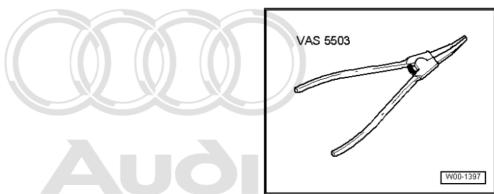


- Do not over-stretch circlips.
- Always renew circlips which have been damaged or overstretched.
- Installation position for some circlips: the circlip is fitted so that the narrow part of the gap is at the top. This also gives the pliers a better grip when removing and installing.
- To facilitate assembly, use circlip pliers VAS 5503A-.
- Circlips must be properly seated in the base of the groove.
- Renew spring pins. Position: the slit -A- should be in line with the line of force -arrow-.



Bolts and nuts

- Loosen the nuts and bolts in reverse sequence to the specified tightening sequence.
- Nuts and bolts which secure covers and housings should be loosened and tightened in diagonal sequence and in stages if no tightening sequence is specified.
- Loosen and tighten particularly sensitive parts in diagonal sequence and in stages, taking care to keep them straight.
- The tightening torques stated apply to non-oiled nuts and bolts.
- Always renew self-locking bolts and nuts.
- Use a wire brush to clean the threads of bolts which are secured with locking fluid. Then install bolts with locking fluid; for locking fluid refer to ⇒ Electronic parts catalogue.
- Threaded holes which take self-locking bolts or bolts coated with locking fluid must be cleaned (using a thread tap or similar). Otherwise there is a danger of the bolts shearing off the next time they are removed.





Shims

- Use a micrometer to measure the shims at several points.
- Check for burrs and damage.
- Do not install shims which are damaged or not in perfect condition.

Bearings

- Install needle bearings, ball sleeves and roller bearings so the lettering (side with thicker metal) faces towards the installing tool.
- Lubricate all bearings in gearbox with gear oil when installing.
- ◆ Use inductive heater VAS 6414- to heat inner races of tapered roller bearings and angular contact ball bearings to approx. 100°C before installing. Press home onto stop when installing so there is no axial clearance.
- Heat inner races of needle bearings and roller bearings to max. 130 °C.
- Do not interchange the outer or inner races of bearings of the same size (the bearings are paired).
- If required, renew the tapered roller bearings on one shaft together and use new bearings from a single manufacturer.

Gear wheels, synchro-hubs, inner races for selector gears


- Before installing, heat inner races for selector gears to approx. 100° C using inductive heater - VAS 6414-
- ◆ Use inductive heater VAS 6414- to heat gear wheels and synchro-hubs to approx. 100 °C before installing. Press home onto stop when installing so there is no axial clearance.
- Note correct installation position.


Selector gears

After installing, check that 1st to 6th speed selector gears have an axial clearance of 0.15 ... 0.50 mm and check that they rotate freely.

Input shaft

- If there is visible damage on the surface of the input shaft in the vicinity of the needle bearing for the dual-mass flywheel -arrow-, both the input shaft and the needle bearing in the dualmass flywheel must be renewed.
- Renewing input shaft ⇒ "2.5 Dismantling and assembling gearbox", page 61
- Renewing needle bearing in dual-mass flywheel ⇒ "2.6 Renewing needle bearing for dual-mass flywheel", page






- - Servicing 6-speed manual gearbox 0CS, 0DJ, 0CX Edition 10.2017
- Check input shaft for scoring around bearing in drive plate -arrow-. Renew needle bearing in drive plate if necessary ⇒ Engine, mechanics; Rep. gr. 13; Cylinder block (gearbox end); Renewing needle bearing in drive plate.
- If the clutch is oily and oil is escaping at front end of drive shaft, a new sealing plug must be fitted in the hole in the drive shaft ⇒ page 133


Synchro-rings

- Do not interchange. When reusing synchro-rings, always fit to the same selector gear.
- Check for wear; renew if necessary.
- Lubricate with gear oil before installing.

Checking molybdenum-coated synchro-rings -I- and carbon-coated synchro-rings -II-

- Clean synchro-ring; the friction surface must be free of oil.
- I Molybdenum-coated synchro-ring
- The friction surface of an intact molybdenum coated synchroring has a graphite-grey, slightly porous appearance.
- The synchro-ring must be renewed if very shiny areas -A- have formed on the friction surface or if the brass-coloured metal underneath is already visible.
- II Carbon-coated synchro-ring
- Check the friction surfaces -B- of carbon-coated synchro-rings for damage (flattened sections or particles of carbon coating broken away). Renew if necessary.






Distinguishing synchro-rings and inner rings for 1st and 2nd gear



Caution


The synchro-rings for 1st and 2nd gear must not be interchanged.

- If synchro-rings are interchanged, the synchromesh will jam or malfunction prematurely.
- The locking collar must be installed in the correct direction *⇒ page 151* .




B - The inner ring for 2nd gear has no friction surface on the inside whole. -arrow 2- and isecylindrical used by AUDI AG. AUDI AG does not guarantee or accept any li t to the correctness of information in this document. Copyright by AUDI AG Distinguishing features:

- Additional lug -arrow 3- on inner ring
- Additional notch on synchro-ring -arrow 4-




Checking synchro-rings for 1st gear

- ♦ Check inner friction surface -arrow 1- on synchro-ring -A- and outer friction surfaces -arrow 3- on inner ring -C- for grooves or scoring.
- Check coated friction surfaces -arrows 2- on intermediate ring -B- and inner friction surfaces -arrow 3- on inner ring -C-.
- The friction surface of an intact molybdenum coated synchroring has a graphite-grey, slightly porous appearance.
- The synchro-ring must be renewed if very shiny areas have formed on the friction surface or if the brass-coloured metal underneath is already visible.



Checking synchro-rings for 2nd gear


- ◆ Check inner friction surface -arrow 1- on synchro-ring -A- and outer friction surface -arrow 3- on inner ring -C- for grooves or
- Check coated friction surfaces -arrows 2- of intermediate ring
- The friction surface of an intact molybdenum coated synchroring has a graphite-grey, slightly porous appearance.
- The synchro-ring must be renewed if very shiny areas have formed on the friction surface or if the brass-coloured metal underneath is already visible.



Abnormal wear on selector gears and locking collars

Abnormal wear on synchro-ring or selector gear:

A - Worn chamfer on dog teeth of synchro-ring or selector gear Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



- In comparison: intact synchro-ring or selector gear:
- B Undamaged chamfer on dog teeth of synchro-ring or selector gear




A35-0046


В

Protected by copyright. Copying for private or commercial purposes, in pa permitted unless authorised by AUDI AG. AUDI AG does not guarantee or with respect to the correctness of information in this document. Copyrigh

- ♦ Abnormal wear on locking collar:
- C Worn chamfer on internal splines of locking collar



- In comparison: intact locking collar:
- D Intact chamfer on internal splines of locking collar
- Always renew synchro-rings with carbon coating together with locking collar. Renew selector gears also if there are traces of wear.



3 Technical data

- ⇒ "3.1 Allocation of gearbox to engine", page 13
- ⇒ "3.2 Capacities", page 13

3.1 Allocation of gearbox to engine

The allocation of the gearbox to the engine, the gearbox code and the axle ratios are described in ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 00; Technical data.

- Protect by copyright. Copying for private or commercial purposes, in part or in whole, is not permit Capacities, by AUDI AG. AUDI AG does not guarantee or accept any liability 3.2 ct to the correctness of information in this docume nt. Copyri ht by AUDI AG.
- ⇒ "3.2.1 Capacities 6-speed manual gearbox 0CS and 0DJ, front-wheel drive", page 13
- ⇒ "3.2.2 Capacities 6-speed manual gearbox 0CX, four-wheel drive", page 14
- ⇒ "3.2.3 Capacity of four-wheel drive coupling 0CX, 0DJ", page 14

3.2.1 Capacities - 6-speed manual gearbox 0CS and 0DJ, front-wheel drive



Note

- 6-speed manual gearbox OCS and ODJ, front-wheel drive, are available with and without a forced lubrication system.
- The oil capacity is reduced on gearboxes with forced lubrication.
- Identification ⇒ page 1

Man- ual gear- box	6-speed 0CS, 0DJ	(front-wheel drive)
Ca- pacity on gear- box with- out forced lubri- cation	2.5	ltr.
Ca-	Filling with new oil	Changing gear oil
pacity on gear- box with forced lubri- cation	1.8 ltr.	1.1 ltr. (0.7 ltr. remain in gearbox)

3.2.2 Capacities - 6-speed manual gearbox 0CX, four-wheel drive

Man- ual gear- box	6-speed 0CX, f	four-wheel drive
Ca-	Filling with new oil	Changing gear oil
pacity on gear-box with forced lubri-cation	1.8 ltr.	1.1 ltr. (0.7 ltr. remain in gearbox)
♦ Gea	r oil specifications ⇒ Elect	tronic partited unless authorised by

3.2.3 Capacity of four-wheel drive coupling 0CX, 0DJ

Four-wheel drive coupling	Four-wheel drive coupling 0CX, 0DJ
Capacity of four-wheel drive coupling	⇒ Rear final drive; Rep. gr. 00; Technical data; Capacities

4 Transmission layout

- ⇒ "4.1 Transmission layout front-wheel drive", page 15
- ⇒ "4.2 Transmission layout four-wheel drive", page 16


4.1 Transmission layout - front-wheel drive

Identification and ratio



Note

- The layout of the components for front-wheel drive and four-wheel drive versions is identical.
- -Arrows- point in direction of travel.
- 1 Engine
- 2 Drive plate
 - With needle bearing for gearbox input shaft
- 3 Clutch module
 - Consists of pressure plate, clutch plate and dual-mass flywheel with flange for drive plate
- 4 Front differential
- 5 Output gear of intermediate drive
- 6 Front pinion shaft
- 7 Input gear of intermediate drive
- 8 Manual gearbox
- Protected by copyright. Copying for private or commer permi**9** of **Quiput shaft**y AUDI AG. AUDI AG di
 - h respect to the correctness of information 10 Input shaft (main shaft)
 - 11 Reverse gear wheel
 - I 1st gear
 - II 2nd gear
 - III 3rd gear
 - IV 4th gear
 - V 5th gear
 - VI 6th gear
 - R Reverse gear
 - A Front final drive

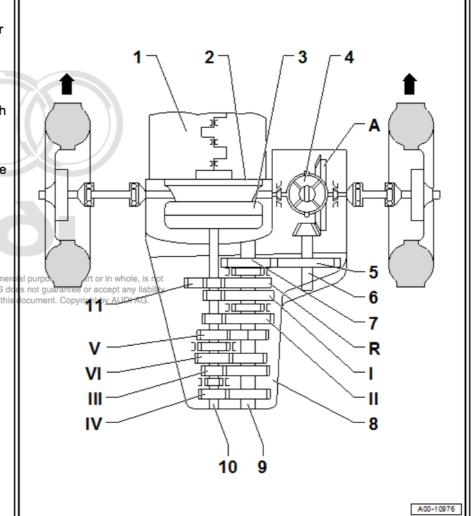

4.2 Transmission layout - four-wheel drive

Identification and ratio




Note

-Arrows- point in direction of travel.

- 1 Manual gearbox
 - □ Layout of components for front-wheel drive and four-wheel drive versions is identical
 - ⇒ page 15
 - Removing and installing ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing for pr gearboxnless authorised by AUDI with respect to the correctness of i
- 2 Four-wheel drive coupling
 - □ Servicing ⇒ Rear final drive; Rep. gr. 39; Fourwheel drive coupling
- 3 Four-wheel drive coupling input shaft
- 4 Multi-plate clutch
- 5 Four-wheel drive coupling output shaft
- 6 All-wheel drive control unit - J492-

The following are integrated in the all-wheel drive control unit:

- Clutch actuator for allwheel drive - V622-
- Clutch position sender for all-wheel drive - G969-
 - □ Removing and installing ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Removing and installing control

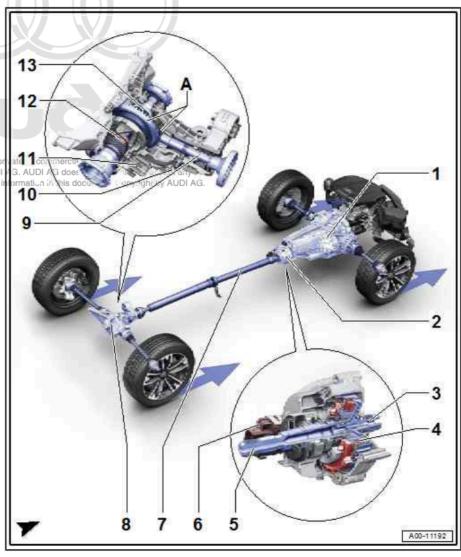

unit

- 7 Propshaft
 - ☐ Overview ⇒ Rear final drive; Rep. gr. 39; Propshaft
- 8 Rear final drive
 - ☐ Overview ⇒ Rear final drive; Rep. gr. 39; Final drive
- 9 Rear pinion shaft
- 10 Propshaft speed sender G970-
- 11 Clutch actuator 2 for all-wheel drive V623-

- 12 Dog clutch
- 13 Rear differential
- A Rear final drive



30 – Clutch

Clutch mechanism


- ⇒ "1.1 Exploded view clutch release mechanism", page 18
- ⇒ "1.2 Removing and installing clutch slave cylinder together with release bearing", page 19
- 1.1 Exploded view - clutch release mechanism
- 1 Bolt
 - □ 3x
 - □ 8 Nm
- 2 Clutch slave cylinder with release bearing
 - □ Clutch slave cylinder and release bearing are one unit and can only be renewed together
 - Removing and installing ⇒ page 19



Note

New clutch slave cylind plied without input shaft and O-ring -5-

- 3 Retaining clip
 - Pull out as far as stop to separate clutch slave cylinder and breather or pipe -arrow-
- 4 Input shaft oil seal
 - ☐ Fitted in clutch slave cyl-
 - □ Renewing ⇒ page 163
- 5 O-ring
 - Renew after removing
- 6 O-ring
 - ☐ Renew breather if damaged
- 7 Breather

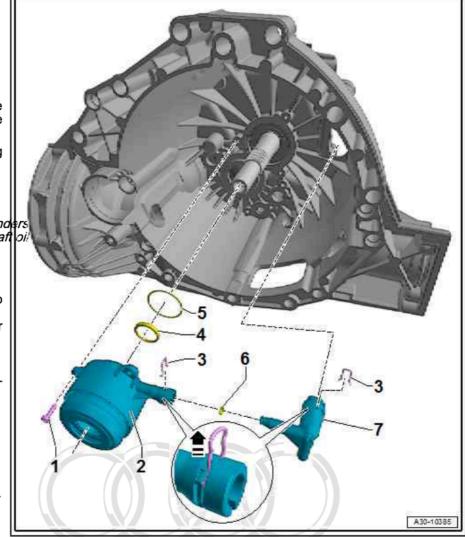






1.2 Removing and installing clutch slave cylinder together with release bearing




Note

- Clutch slave cylinder and release bearing are one unit and can only be renewed together.
- New clutch slave cylinders are supplied without an O-ring -1and input shaft oil seal -2-⇒ "1.4 Renewing input shaft oil seal", page 163.
- If you suspect a defective clutch slave cylinder, perform function test prior to renewing ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 30; Clutch mechanism; Checking clutch master cylinder and clutch slave cylinder.
- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, OCX; Rep. gr. 34; Removing and installing gearbox



Special tools and workshop equipment required

◆ Torque wrench - V.A.G 1331-

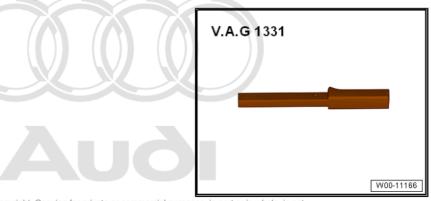

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not

AUDI AG does not guarantee or accept any liability ◆ Sealing grease for oil sealsing seals authorised by AUDI AG. AUDI AG does not guarantee or accept any liat

Sealing grease for oil sealsing seals authorised by AUDI AG. AUDI AG does not guarantee or accept any liat


Catalogue this document. Copyright by AUDI AG.


Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox .
- Clutch module removed ⇒ page 30.
- Remove bolts -arrows-.
- Carefully take clutch slave cylinder off input shaft together with release bearing -A-.

Installing

Installation is carried out in reverse order; note the following:








Note

- ♦ Always renew O-ring -1-. Lightly lubricate O-ring with gear oil.
- Install input shaft oil seal -2- if it is not fitted, or renew oil seal if it is leaking ⇒ page 163.
- Pack space between sealing lips -arrow- of input shaft oil seal half-full with sealing grease.






Caution


Tighten securing bolts -arrows- for slave cylinder in small steps.

- Tighten securing bolts -arrows-.
- Bleed clutch mechanism after installing gearbox ⇒ 6-speed manual gearbox 0GSp 0DJp 0GXp Repalgrox30, p Clutch mechanot anism; Bleeding clutch mechanism does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Tightening torques

♦ ± "1.1 Exploded view - clutch release mechanism", page 18





2 Clutch

- ⇒ "2.1 General notes on clutch", page 21
- ⇒ "2.2 Exploded view clutch unit", page 24
- ⇒ "2.3 Removing and installing clutch module", page 30
- ⇒ "2.4 Removing and installing clutch", page 35
- ⇒ "2.5 Resetting adjuster ring in SAC pressure plate", page 43
- ⇒ "2.6 Renewing needle bearing for dual-mass flywheel", page 46

2.1 General notes on clutch



Note

- Refer to general repair instructions ⇒ page 5.
- Servicing clutch mechanism and clutch hydraulics ⇒ 6-speed manual gearbox OCS, ODJ, OCX; Rep. gr. 30; Clutch mech-Protected by anisom. by AUDI AG. AUDI AG does not guarante permitted u
 - with Pethologearbox must be removed before working on the clutch ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox .
 - To avoid damaging clutch pressure plate when removing and installing, observe assembly instructions.
 - Checking pressure plate for distortion ⇒ page 26 and
 - ♦ Renew clutch plate and pressure plate if riveted fastening is damaged or loose.
 - ♦ Select the correct clutch plate and pressure plate according to engine code ⇒ Electronic parts catalogue .
 - ♦ If the clutch has burnt out, clean the gearbox housing thoroughly in the area of the clutch in order to prevent odour.
 - Clutch pressure plates have an anti-corrosion coating and are greased. With the exception of the friction surface for the clutch plate, the clutch pressure plate must not be cleaned. Otherwise, the service life of the clutch will be considerably reduced.
 - The friction surface of the clutch pressure plate and the dualmass flywheel must be cleaned (degreased) thoroughly.
 - Clean the input shaft splines and (in the case of used clutch) plates) the hub splines. Remove corrosion and apply only a very thin coating of grease for clutch plate splines to the splines. Then move clutch plate backwards and forwards on input shaft until hub moves freely on shaft. It is important to remove excess grease.
 - Remove grease from input shaft bearing journal as far as splines.
 - If the clutch is oily and oil is escaping at front end of drive shaft, a new sealing plug must be fitted in the hole in the drive shaft *⇒ page 133* .

Notes on clutch module

"Clacking" sound (can be disregarded) in the clutch module -Afor the LuK version dual-mass flywheel with centrifugal pendulum absorber.

- Depending on version, clutch modules -A- with or without centrifugal pendulum absorbers may be fitted.
- When a clutch module with a centrifugal pendulum absorber is turned by hand, a clacking sound can be heard at intervals of approx. 90°.
- This is caused by a centrifugal pendulum absorber in the dualmass flywheel and is not a fault.


Place clutch module carefully on a work bench -2- (do not put it down with flange -1- facing downwards).




Note

- Do not put down the module with the clutch pressure plate facing downwards; otherwise the adjustment mechanism -arrow- may be damaged.
- Do not place on extractor T40176- .

Protected by copyright. Copying for private or commercial purposes, in part of permitted unless authorised by AUDI AG. AUDI AG does not guarantee or a with respect to the correctness of information in this document. Copyright





Notes on "TAC" clutch, LuK version


Can be identified by pressure plate with adjustment mechanism



Caution

Risk of damage to clutch

Do not turn using opening -2- of adjustment mechanism.




Notes on dual-mass flywheel



Caution

- When the dual-mass flywheel is removed, the two weights may turn, shift and tilt slightly; this relative movement is part of the design and not a fault.
- The dual-mass flywheel does not settle until it is fitted in the gearbox and secured to the engine.






Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.


- When the secondary inertia weight -1- is rotated against the primary weight -2- as indicated by -arrows A-, it should turn smoothly as far as the stop in each direction with even resistance.
- Both stops are spring-loaded.
- The secondary inertia weight -1- can be moved horizontally in direction of -arrows B- relative to the primary weight -2-.
- ◆ The secondary weight -1- has a tilting clearance relative to the primary weight -2- (direction of -arrows C-).

Checking dual-mass flywheel for damage

- Check projections -arrow A- and friction surface -arrow B- for cracks.
- Ensure that dowel pins -arrows C- are seated securely in dualmass flywheel.
- Surface -2- must not be warped -arrow D-.
- Drive plate -3- must not be bent.








Damage to wall of dual-mass flywheel housing

Damage to housing wall is caused by a defective bow spring -1- or bow spring mounting.




Notes on needle bearing in dual-mass flywheel and input shaft


Check needle bearing in dual-mass flywheel and renew if necessary ⇒ page 46.

If there is visible damage on the surface of the input shaft in the vicinity of the needle bearing for the dual-mass flywheel -arrow-, both the input shaft and the needle bearing in the dual-mass flywheel must be renewed ⇒ page 46.

Renewing input shaft ⇒ page 61



Check input shaft for scoring around bearing in drive plate -arrow-. Renew needle bearing in drive plate if necessary ⇒ Engine, mechanics; Rep. gr. 13; Cylinder block (gearbox end); Renewing needle bearing in drive plate.



2.2 Exploded view - clutch unit

⇒ "2.2.1 Exploded view - clutch unit, SAC clutch (LuK version)", page 24

⇒ "2.2.2 Exploded view - clutch unit, TAC clutch (LuK version)", page 27

2.2.1 Exploded view - clutch unit, SAC clutch (LuK version)

- Observe notes on clutch page 21 pyright. Copying for private or commercial purposes, in part or in whole, is not orised by AUDI AG. AUDI AG does not guarantee or accept any liability
- "SAC" stands for "Self-Adjusting Clutch" correctness of information in this document. Copyright by AUDI AG.
- Clutch pressure plate and clutch plate can be renewed separately.
- When only the clutch plate is being renewed, the adjuster ring in the pressure plate has to be reset before assembly ⇒ page 43 .
- Identification ⇒ page 26

1 - Clutch module Removing and installing ⇒ page 30 2 - Seal □ For dual-mass flywheel □ Pulling out ⇒ page 47 □ Driving in ⇒ page 49 3 - Needle bearing cial purposes, in part or in whole, is no tected by copyric ng for private or comm ☐ For dual-mass flywheel AUDI AG. AUDI AG Des not guarantee or accept any liability permitted un information in this document. Copyright by AUDI AG. Pressing out ⇒ page 48 Pressing in ⇒ page 48 Note Always renew needle bearing if input shaft is damaged ⇒ page 47 4 - Dual-mass flywheel With flange for drive plate Ensure that dowel pins fit tightly □ Contact surface for clutch lining must be free of grooves, oil and grease Different versions with or without centrifugal pendulum absorber ⇒ page 26 A30-10210 Removing and installing ⇒ page 35 5 - Clutch plate □ Removing and installing ⇒ page 35 ☐ For correct version, refer to ⇒ Electronic parts catalogue ☐ If present, marking "Getriebeseite" (gearbox side) faces pressure plate

☐ If fitted, coil springs (damper assembly) face towards pressure plate

6 - SAC pressure plate


- Self-adjusting
- ☐ For correct version, refer to ⇒ Electronic parts catalogue
- □ Removing and installing ⇒ page 35
- □ Resetting adjuster ring ⇒ page 43
- ☐ Checking pressure plate for distortion ⇒ page 26
- □ Checking ends of diaphragm spring ⇒ page 26
- □ Checking springs and riveting ⇒ page 27
- Contact surface for clutch lining must be free of grooves, oil and grease

7 - Bolt

- □ Secures pressure plate to dual-mass flywheel
- Observe assembly instructions ⇒ page 35 for loosening or tightening
- Renew after removing
- ☐ 22 Nm +90°


Identification: SAC clutch

Visible adjustment mechanism (adjuster ring with springs)



"Clacking" sound in LuK version dual-mass flywheel with centrifugal pendulum absorber

- Depending on version, clutch modules -A- with or without centrifugal pendulum absorbers may be fitted.
- When a clutch module with a centrifugal pendulum absorber is turned by hand, a clacking sound can be heard at intervals of approx. 90°.
- This is caused by a centrifugal pendulum absorber in the dualmass flywheel and is not a fault.




Checking pressure plate for distortion, cracks and burning

A - Straightedge


B - Feeler gauge

Pressure plate distortion up to 0.8 mm is permissible.

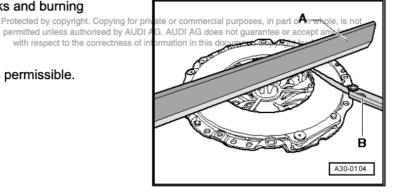

Checking ends of diaphragm spring


Wear up to 0.3 mm (maximum) is permissible.






Checking springs and riveting

- I Springs OK
- Slight kinking on the outside -arrows A- is normal on production parts.
- II Springs damaged
- Renew pressure plate if springs are broken or badly bent -arrow B-.



- Check that riveting -arrows B- is secure at all springs -arrows A-.
- Renew pressure plate if rivets -arrows B- are loose.



Exploded view - clutch unit, TAC clutch (LuK version) 2.2.2

- Observe notes on clutch ⇒ page 21.
- Pressure plate and clutch plate can only be renewed together.
- "TAC" stands for "Travel Adjusted Clutch".
- ♦ Identification ⇒ page 29

Servicing 6-speed manual gearbox 0CS, 0DJ, 0CX - Edition 10.2017

1 - C	lutch module			
	Removing and installing ⇒ page 30			
2 - Seal				
	For dual-mass flywheel			
	Pulling out <u>⇒ page 47</u>			
	Driving in ⇒ page 49	2 3 4		
3 - N	eedle bearing			
Ŭ	For dual-mass flywheel			
	For correct version, re-	Q 1 09700		
	fer to ⇒ Electronic parts catalogue	5 6 7		
	Check and renew if necessary ⇒ page 46			
	Pressing out ⇒ page 48			
	Pressing in ⇒ page 48			
į	Note			
	Always renew needle b put shaft is damaged ⇒			
4 - D	ual-mass flywheel			
	With flange for drive			
	plate			
	Ensure that dowel pins fit tightly			
	00,			
	clutch lining must be free of grooves, oil and			
	grease	A30-10333		
	Removing and installing ⇒ page 35			
		without centrifugal pendulum absorber ⇒ page 29		
5 - C	lutch plate			
۰	Removing and installing	page 35		
		to ⇒ Electronic parts catalogue		
		ing "Getriebeseite" (gearbox side) faces towards pressure plate		
6 D	Protected by copyright. Copying for priva	ate or commercial purposes, in part or in whole, is not 3. AUDI AG does not guarantee or accept any liability		
0-1		rmation in this document. Copyright by AUDI AG.		
_	Identification ⇒ page 29			
_		plate can only be renewed together		
_	·	to ⇒ Electronic parts catalogue		
_		· · · · · · · · · · · · · · · · · · ·		
_				
	Checking springs and riveting ⇒ page 30			
_	Checking springs and riveting <u>⇒ page 30</u> Checking metal ring ⇒ page 30			
_				

7 - Bolt


☐ Secures pressure plate to dual-mass flywheel

☐ Observe assembly instructions <u>⇒ page 35</u> for loosening or tightening

- Renew after removing.
- □ 22 Nm +90°

"Clacking" sound in LuK version dual-mass flywheel with centrifugal pendulum absorber

- Depending on version, clutch modules -A- with or without centrifugal pendulum absorbers may be fitted.
- When a clutch module with a centrifugal pendulum absorber is turned by hand, a clacking sound can be heard at intervals of approx. 90°.
- ♦ This is caused by moving pendulum masses in the dual-mass guar flywheel and is not a faulth respect to the correctness of information in this document.



Identification: "TAC" clutch, LuK version


Pressure plate with adjustment mechanism -1-.



Caution


Risk of damage to clutch

Do not turn using opening -2- of adjustment mechanism.




Checking pressure plate for distortion, cracks and burning

- A Straightedge
- B Feeler gauge
- Pressure plate distortion up to 0.8 mm is permissible.




Checking ends of diaphragm spring

· Wear up to 0.3 mm (maximum) is permissible.




Checking springs and riveting

- I Springs OK
- Slight kinking on the outside -arrows A- is normal on production parts.
- II Springs damaged
- Renew pressure plate if springs are broken or badly bent -arrow B-.



- Check that riveting -arrows B- is secure at all springs -arrows A-.
- Renew pressure plate if rivets -arrows B- are loose.




Protected by copyright. Copying for private or commercial purposes, in p

Checking metal ring

with respect to the correctness of information in this document. Copyr Check that metal ring in clutch pressure plate -arrow- is not


- damaged.
- Renew pressure plate if metal ring is broken.

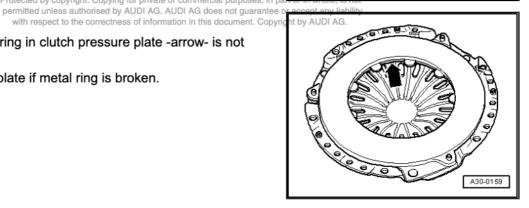


2.3 Removing and installing clutch module


Special tools and workshop equipment required

Extractor - T40176-




- ◆ Grease for clutch plate splines ⇒ Electronic parts catalogue Removing
- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-.
- Tilt gearbox to rear with gearbox support T40173- to prevent gear oil from escaping.
- Remove flange shaft (left-side) -2- ⇒ page 219 .








- Depending on version, clutch modules -A- with or without centrifugal pendulum absorbers may be fitted.
- When a clutch module with a centrifugal pendulum absorber is turned by hand, a clacking sound can be heard at intervals of approx. 90°.
- This is caused by a centrifugal pendulum absorber in the dualmass flywheel and is not a fault.



Attach extractor - T40176- to clutch module -A- using nut -B-




Turn extractor - T40176- upwards.




Caution

Risk of damage to oil seals and needle bearing in dual-mass flywheel.

- The clutch module weighs approx. 20 kg.
- Keep firm hold of the bottom of the clutch module, as shown in the illustration, to prevent the clutch module from tilting over.
- When removing and installing the clutch module, take care not to damage the oil seals and needle bearing in the dualmass flywheel -arrow-.
- Renew oil seals or needle bearing if damaged *⇒ page 46 .*








Caution


Risk of damage to adjustment mechanism -arrow- of TAC clutch pressure plate.

Take care not to damage flange -1- for drive plate on dual-mass flywheel.

- Do not put down the module with the clutch pressure plate facing downwards; otherwise the adjustment mechanism -arrow- may be damaged.
- Do not put down clutch module with flange -1- for drive plate facing downwards.
- ◆ Do not place on extractor T40176- .







Installing clutch module

Installation is carried out in reverse order; note the following:


Thoroughly clean flange shaft (left-side), area of gearbox housing leading to differential -arrow A- and oil seal -arrow B-.




Note

If oil seal between differential and gearbox housing -arrow B- is damaged, it must be renewed ⇒ page 158.

Pack space between sealing lip and dust lip -arrow B- half full with sealing grease for oil seals ⇒ Electronic parts catalogue .










Caution


Before installing clutch module, remove grease from input shaft bearing journal -arrow- as far as splines.



- Detach extractor T40176- from clutch module.
- Install flange shaft (left-side) ⇒ page 222.








Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

The following preparations must be made before installing the gearbox:

Insert assembly aid - T40169- into gearbox housing and clutch module from below, as shown in illustration.




Protected by copyright. Copying for permitted unless authorised by AU with respect to the correctness o

The assembly tool - T40169- must engage in the semi-circular recess and in the hole (-arrow A- and -arrow B-).




Note

There is only one inspection hole -arrow B- at the periphery; turn the clutch module accordingly.



Insert transportation lock - T40170- into gearbox housing from below and clamp onto flange shaft -1-.





Removing and installing clutch 2.4


⇒ "2.4.1 Removing and installing SAC clutch, LuK version", page 35

⇒ "2.4.2 Removing and installing clutch unit, LuK version with TAC pressure plate", page 39

Removing and installing SAC clutch, 2.4.1 "LuK" version

Identification: SAC clutch


· Visible adjustment mechanism (adjuster ring with springs)






Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Special tools and workshop equipment required

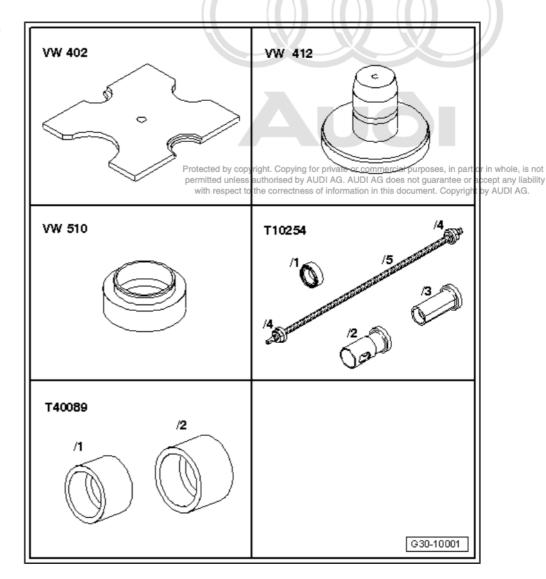

- Thrust plate VW 402-
- Press tool VW 412-
- Thrust pad VW 510-
- Assembly tool T10254-
- Thrust piece T40089-
- Centring mandrel T40171-



Removing

Remove clutch module ⇒ page 30.

3 - Pressure plate

Caution

Take care not to damage pressure plate and dualmass flywheel. Pressure plate -3- must be compressed before removing or installing.

l∳the pressure plate is not compressed, it will become distorted when the bolts -2- are slackened or tightened (causes clutch grab when driving off).

The dual-mass flywheel must rest only on the bearing washer -arrow A- when compressing the pressure plate -3- in the hydraulic press.

If the dual-mass flywheel is supported on the flange for drive plate -1-, the flange will become distorted and the flywheel will thus be damaged. In this case, the dual-mass flywheel will have to be renewed.

- Position the clutch module so that the thrust pad - VW 510- makes contact with the bearing washer -arrow A- in the dual-mass flywheel.
- VW 412 T10254/3 Protected by copyright. Copyright oses, in part or in whole, is not permitted unless authorised e or accept any with respect to the corre AUD В VW 510 T40089/2 VW 402 A30-10180
- Place the assembly tool T10254/3- on the spring tongues in the diaphragm of the pressure plate -3and apply the press.
- Distance of travel: dimension -x- = 8 to 9 mm



Note


A second mechanic is required for the next step.

- Remove all 6 bolts -2- and release press.
- Remove pressure plate -3- and clutch plate.

Installing

Installation is carried out in reverse order; note the following:

- Checking clutch pressure plate for distortion ⇒ page 26
- Observe notes on clutch ⇒ page 21.
- Use centring mandrel T40171- to centralise clutch plate.
- Installation position of clutch plate: damper assembly (coil springs) or marking "Getriebeseite" (gearbox side) point towards pressure plate.
- Position pressure plate on centring pins.
- Position the clutch module so that the thrust pad VW 510makes contact with the bearing washer parrow Aprin the dual-not mass. The whole live correctness of information in this document. Copyright by AUDI AG.



1 - Pressure plate

Caution

Take care not to damage dual-mass flywheel. The dual-mass flywheel -3- must rest only on the bearing washer -arrow A- when compressing the pressure plate -1- in the hydraulic press.

I₱the dual-mass flywheel is supported on the flange for drive plate -arrow B-, the flange will become distorted and the flywheel will thus be damaged. In this case, the dual-mass flywheel will have to be renewed.


- Place assembly tool -T10254/3- over centring mandrel - T40171- .
- Apply press until pressure plate -1- just makes contact with dual-mass flywheel -3- -arrows C-.



Note

A second mechanic is r the next step.

- Screw in each of the 6 bolts -2- in succession and tighten to final torque.
- Release press.
- Install clutch module ⇒ page 30.

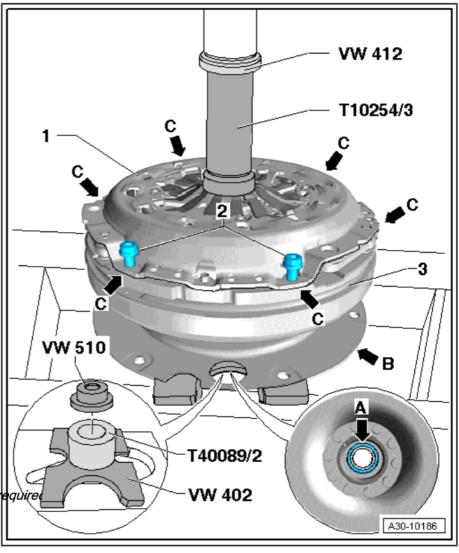



Tightening torques

♦ ⇒ "2.2.1 Exploded view - clutch unit, SAC clutch (LuK version)", page 24

2.4.2 Removing and installing clutch unit, LuK version with TAC pressure plate

Identification: TAC clutch, "LuK" version


Clutch pressure plate with adjustment mechanism -1- and -2-.




Caution

Risk of damage to clutch

· Do not turn using opening -2- of adjustment mechanism.




Special tools and workshop equipment required

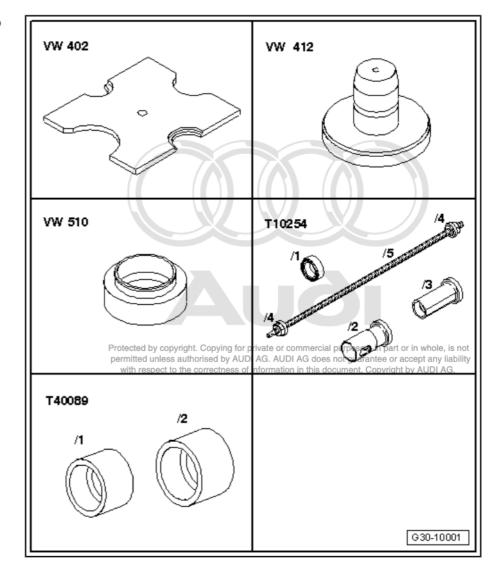


- Thrust plate VW 402-
- Press tool VW 412-

- Thrust pad VW 510-
- Assembly tool T10254- is not required
- Thrust piece T40089-
- Installing ring 2003/3-




Fitting sleeve - 3241/4-





Centring mandrel - T40171-

Protected by copyright. Copying for private or commercial purposes, in part or in who permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept at with respect to the correctness of information in this document. Copyright by AUD



Removing

Remove clutch module ⇒ page 30 .

3 - Pressure plate



Caution


Take care not to damage pressure plate and dualmass flywheel. Pressure plate -3- must be compressed before removing or installing.

l**∳**the pressure plate is not compressed, it will become distorted when the bolts -2- are slackened or tightened (causes clutch grab when driving off).

The dual-mass flywheel must rest only on the bearing washer -arrow A- when compressing the pressure plate -3- in the hydraulic press.

l∳the dual-mass flywheel is supported on the flange for drive plate -1-, the flange will become distorted and the flywheel will thus be damaged. In this case, the dual-mass flywheel will have to be renewed.

Position the clutch module so that the thrust pad - VW 510- makes contact with the bearing washer -arrow A- in the dual-mass flywheel.

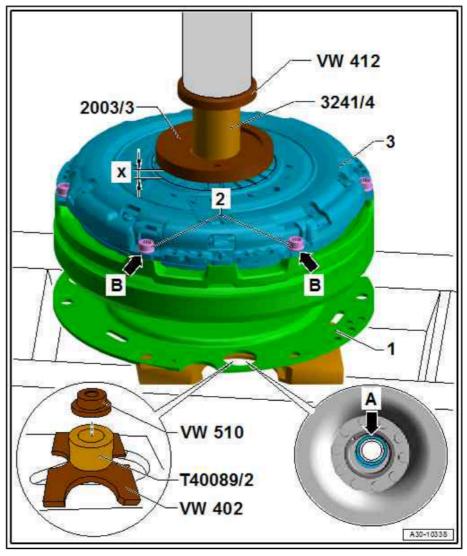

- Place fitting sleeve 3241/4- with installing ring 2003/3- attached on spring tongues in diaphragm of clutch pressure plate -3- and apply press.
- Distance of travel: dimension -x- = 8 to 9 mm



Note

A second mechanic is required for the next step.

- Remove all 6 bolts -2- and release press.
- Remove pressure plate -3- and clutch plate.




Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Installing

Installation is carried out in reverse order; note the following:

- Checking clutch pressure plate for distortion ⇒ page 26
- Observe notes on clutch ⇒ page 21.
- Use centring mandrel T40171- to centralise clutch plate.
- Position pressure plate on centring pins.
- Installation position of clutch plate: Marking "Getriebeseite" (gearbox side) faces clutch pressure plate.
- Position the clutch module so that the thrust pad VW 510makes contact with the bearing washer -arrow A- in the dualmass flywheel.



1 - Pressure plate



Caution

Take care not to damage dual-mass flywheel. The dual-mass flywheel ·3- must rest only on the bearing washer -arrow A- when compressing the pressure plate -1- in the hydraulic press.


I₱the dual-mass flywheel is supported on the flange for drive plate -arrow B-, the flange will become distorted and the flywheel will thus be damaged. In this case, the dual-mass flywheel will have to be renewed.

- Place fitting sleeve -3241/4- with installing ring - 2003/3- attached over centring mandrel -T40171-.
- Apply press until pressure plate -1- just makes contact with dual-mass flywheel -3- -arrows C-.



Note tected by copyright. Copy permitted unless authorised with respect to the correct

A second mechanic is required for the next step.

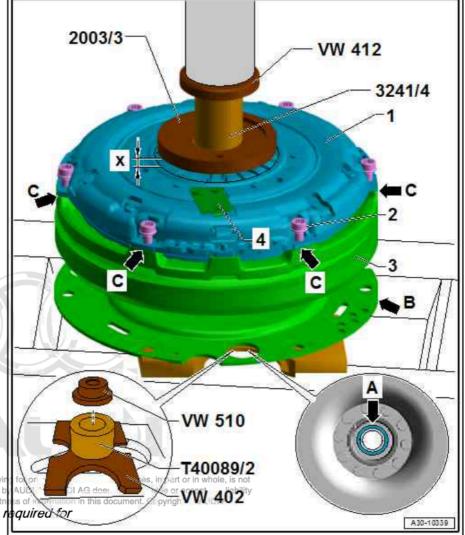

- Screw in each of the 6 bolts -2- in succession and tighten to final torque.
- Release press.
- Then apply workshop press two more times.
- Distance of travel: dimension -x-=8 to 9 mm



Where necessary, this will lift adjustment mechanism -4- and adjust clutch.

Install clutch module ⇒ page 30.

Tightening torques

⇒ "2.2.2 Exploded view - clutch unit, TAC clutch (LuK version)" page 27 Protected by copyright. Copying for private or commercial p Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability sion)", page 27 nt. Copyright by AUDI AG.

Resetting adjuster ring in SAC pressure 2.5 plate



Note


- When fitting a new clutch plate in conjunction with a used pressure plate, the adjuster ring in the pressure plate has to be reset by turning it back as far as it will go. If you do not reset the adjuster ring in the pressure plate, the pressure plate will operate with reduced clamping force, which will cause excessive wear, especially of the clutch plate (clutch will then slip).
- If the clutch plate is not renewed, it is not necessary to reset the adjuster ring.
- ♦ New pressure plates are pre-set accordingly, and do not have to be reset.

Special tools and workshop equipment required

Press tool - VW 412-




◆ Thrust pad - 3062-




Procedure

- Insert 3 securing bolts for pressure plate -A- into mounting holes on pressure plate at 120° (1/3 turn) intervals, as shown in illustration.
- Screw 3 M8 nuts -B- onto bolts -A- and tighten nuts slightly.




- Place pressure plate on press so that only the 3 bolt heads -arrows- make contact.
- Position thrust pad 3062- in the centre of the pressure plate.

Protected by copyright. Copying permitted unless authorised by with respect to the correctne



Do not apply any force when performing the following work, as this could cause the forks on the adjuster ring to break off.

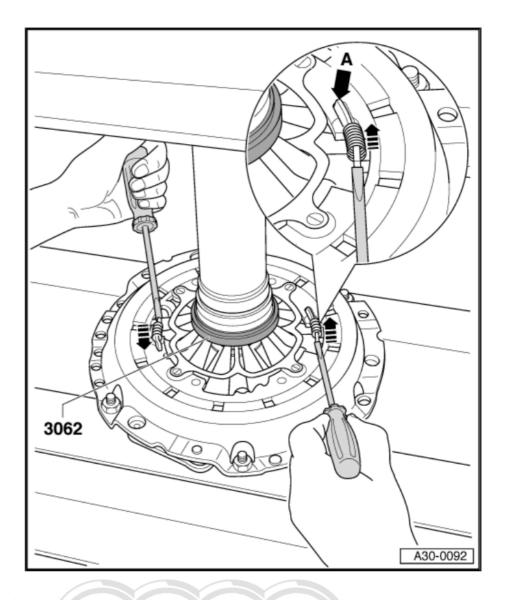


- Apply two screwdrivers to forks on adjuster ring. Use press to apply pressure to pressure plate until it is just possible to move adjuster ring.
- Using both screwdrivers, turn adjuster ring back evenly in direction of -arrows- as far as stop -arrow A-.
- Hold adjuster ring against stop and relieve pressure applied by press so that adjuster ring is held in this position.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.


Renewing needle bearing for dual-mass flywheel 2.6

Special tools and workshop equipment required

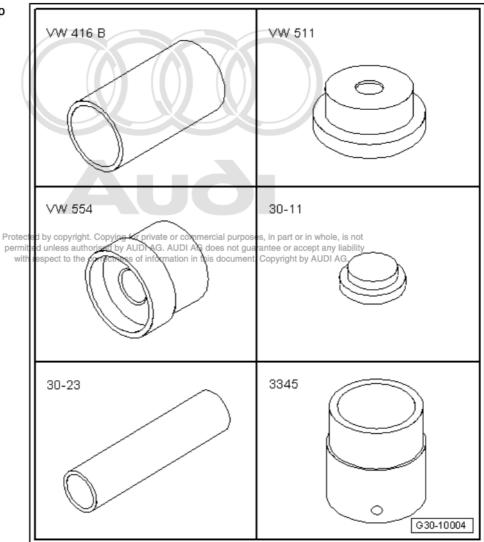


- Tube VW 416 B-
- Thrust pad VW 511-
- Thrust piece VW 554-
- Thrust plate 30 11-
- Extension 30 23-
- Wheel bearing tube 3345-

-1- Internal puller - VAS 251 609 (Kukko 21-4)-



◆ -1- Internal puller - VAS 251 611 (Kukko 21-5)-






Note

- ♦ If there is visible damage on the surface of the input shaft in the vicinity of the needle bearing for the dual-mass flywheel ses, in -arrow-, both the input shaft and the needle bearing in the dual-mass. mass flywheel must be renewed.
- Depending on the version, needle bearings -A- or ball bearings -B- may be fitted in the dual-mass flywheel.
- ♦ For correct version, refer to ⇒ Electronic parts catalogue


Removing

Clutch pressure plate with clutch plate removed from dualmass flywheel ⇒ page 35.



Removing oil seal from dual-mass flywheel

- Clamp internal puller -A- behind sealing lip of oil seal -B- and pry out oil seal.
- A Internal puller 30 ... 37 mm VAS 251 611 (Kukko 21-5)-



Pressing needle bearing out of dual-mass flywheel



Caution

Take care not to damage dual-mass flywheel.

- If the dual-mass flywheel is supported on the flange for drive plate -B-, the flange will become distorted and the flywheel will thus be damaged. In this case, the dual-mass flywheel will have to be renewed.
- Always renew the needle bearing when it has been removed from the dual-mass flywheel.
- Remove oil seal from dual-mass flywheel ⇒ page 47.
- Apply internal puller -A- in area of seal -arrow- in needle bearing and tighten puller.
- A Internal puller 23.5 ... 30 mm VAS 251 609 (Kukko 21-4)-
- Then apply press tool VW 554- to internal puller and press out needle bearing.

Pressing in needle bearing for dual-mass flywheel (press onto stop)



ected by copyright. Copying for private or commercial purposes, in part Caution ted unless authorised by AUDI AG. AUDI AG does not guarantee o with respect to the correctness of information in this document. Copyrig

Take care not to damage dual-mass flywheel.


- The centring pins on the dual-mass flywheel can be damaged when pressing in the needle bearing.
- The dual-mass flywheel must always be supported centrally under the bearing mounting for the needle bearing -arrow-.
- Remove remaining grease in bore for needle bearing in dualmass flywheel using a dry cleaning cloth.





Note

Do not use solvent for cleaning bore.

- Support dual-mass flywheel -1- with thrust pad VW 511- directly below bearing mounting -arrow-.
- Insert smaller diameter of thrust plate 30 11- in needle bearing -A-. Lettering on needle bearing (thicker metal) must face towards thrust plate .
- Carefully press in needle bearing as far as stop.










Driving oil seal into dual-mass flywheel (drive in onto stop)

- Needle bearing is installed in dual-mass flywheel.
- Open side of oil seal faces towards needle bearing.
- Carefully drive in seal onto stop.
- Attach clutch pressure plate with clutch plate to dual-mass flywheel <u>⇒ page 35</u>.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Controls, housing

Transporting gearbox


Special tools and workshop equipment required

♦ Hook and support tool - 3311-






Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.





Procedure

- Attach gearbox to hook and support tool 3311- and secure with bolt -arrow-.
- The workshop hoist VAS 6100- can be used to lift and move the gearbox.




2 Dismantling and assembling gearbox

- ⇒ "2.1 Schematic overview gearbox", page 51
- ⇒ "2.2.2 Exploded view gearbox with forced lubrication", page 55
- ⇒ "2.3 Exploded view gear cluster, reverse gear wheel, selector mechanism", page 58
- ⇒ "2.4 Exploded view selector forks", page 60
- ⇒ "2.5 Dismantling and assembling gearbox", page 61
- ⇒ "2.6 Removing and installing selector shaft", page 89

2.1 Schematic overview - gearbox

- Protected by copyright Copying for private or comme permitted unless authorised by AUDI AG. AUDI AG of with resected notices to pressure in the plate, clutch plate and dual-mass flywheel with flange for drive plate
 - 2 Gearbox housing
 - 3 Cover for final drive
 - 4 Flange shaft (right-side)
 - 5 Differential
 - With crown wheel
 - 6 Final drive gear set
 - Pinion shaft with crown wheel/ differential
 - 7 Pinion shaft
 - 8 Spur gear drive output gear
 - 9 Reverse gear
 - 10 1st gear
 - 11 2nd gear
 - 12 Gearbox cover
 - 13 Output shaft
 - 14 Input shaft (main shaft)
 - 15 4th gear
 - 16 3rd gear
 - 17 6th gear
 - 18 5th gear
 - 19 Reverse gear wheel
 - 20 Spur gear drive input gear
 - 21 Flange shaft (left-side)

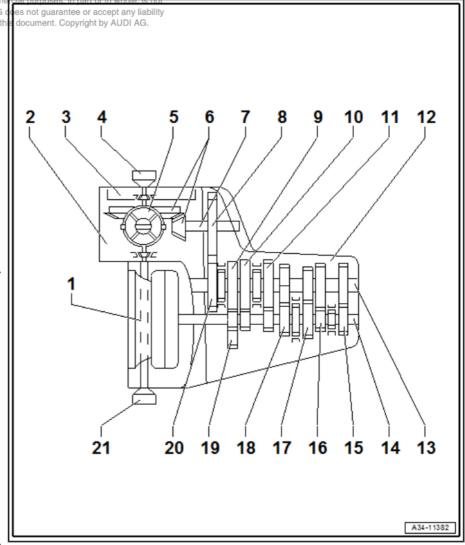

2.2 Exploded view - gearbox

⇒ "2.2.1 Exploded view - gearbox without forced lubrication", page

⇒ "2.2.2 Exploded view - gearbox with forced lubrication", page 55

2.2.1 Exploded view - gearbox without forced lubrication

Differentiation of manual gearbox with and without forced lubrication ⇒ page 1

1 - Clutch module

- Removing and installing
- Servicing ⇒ page 24

2 - Bolt

- □ 3x
- □ Tightening torque ⇒ page 18
- 3 Clutch slave cylinder with release bearing
 - Removing and installing ⇒ page 19

4 - O-ring

Renew after removing

5 - Circlip

- Determining thickness ⇒ page 73
- □ Insert in circumferential groove in input shaft

6 - Sealing cap

- For output shaft
- ☐ Clip onto oil guide
- Renew after removing
- Do not use additional lubricant on outer circumference for installation
- Renewing ⇒ "1.5 Renewing sealing cap for output shaft

in gearbox housing", page 165

7 - Oil guide


Clip into sealing cap

8 - Bolt

- For output shaft
- ☐ Install with locking fluid; for locking fluid refer to ⇒ Electronic parts catalogue
- □ 350 Nm

9 - Gearbox housing

- ☐ With gear cluster (input and output shafts) and selector fork cluster
- Removing and installing gear cluster (input and output shafts), reverse gear wheel and selector fork cluster ⇒ page 58
- Servicing gearbox housing ⇒ page 92

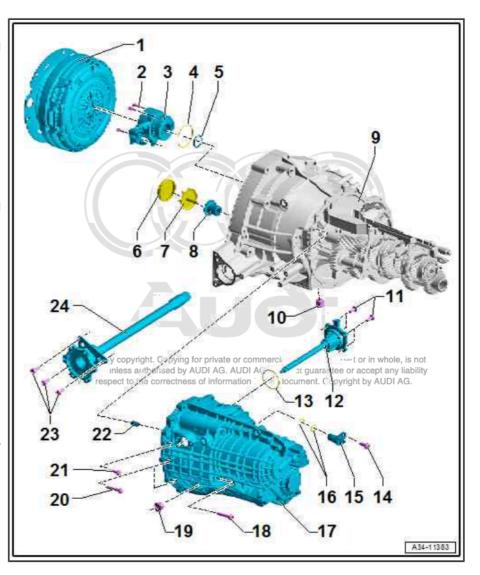

	Removing and installing differential ⇒ page 169
10 - O	Dil drain plug
	Tightening torque ⇒ page 94
0	Aluminium bolts (M8x22)
	selector shaft with selector mechanism cover Removing and installing <mark>⇒ page 89</mark>
13 - O	O-ring Renew after removing
	Renew after removing 8 Nm +60°
0	Gear detection sensor - G604- Does not have to be removed when dismantling and assembling gearbox Installation position ⇒ page 54 Please refer to installation instructions ⇒ page 54 Can be removed and installed with gearbox installed in vehicle ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Selector mechanism
	O-rings Renew after removing
18 - B	Steel bolts (M8x30) 3x Secures bearing mounting to gearbox cover Self-locking
	Renew after removing 20 Nm +30°
pelmi wit	Dil filler plug ted by copyright. Copying for private or commercial purposes, in part or in whole, is not it45□Nm authorised by AUDI AG. AUDI AG does not guarantee or accept any liability h respect to the correctness of information in this document. Copyright by AUDI AG.
0	Aluminium bolts (M8x55) 2x Renew after removing 8 Nm +120°
0	Aluminium bolts (M8x40) 14x Renew after removing 8 Nm +120°
22 - D	owel sleeve

Servicing 6-speed manual gearbox 0CS, 0DJ, 0CX - Edition 10.2017

- 23 Bolt
 - ☐ Steel bolts (M8x25)
 - □ 3x
 - ☐ Tightening torque ⇒ Item 1 (page 170)
- 24 Flange shaft (left-side)
 - With mounting bracket
 - □ Removing and installing ⇒ page 219
 - □ Renewing mounting bracket and ball bearing ⇒ page 225

Installation position of gear detection sensor - G604-


- Bolt
- 2 -Connector
- Gear detection sensor
- 4 -O-rings



Caution

Take care when installing gear detection sensor - G604- : risk of breakage or sensor malfunction

- Gear detection sensor G604- -3- must not be knocked into the gearbox or pulled in by tightening bolt -1-.
- O-rings -4- and bore in gearbox cover must be lubricated with gear oil.
- Gear detection sensor G604- -3- can be pushed in carefully using a suitable tool, such as a hammer handle.





Note

The gear detection sensor - G604- can also be removed and installed with the gearbox in the vehicle ⇒ 6-speed manual gearbox OCS, ODJ, OCX; Rep. gr. 34; Selector mechanism.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



2.2.2 Exploded view - gearbox with forced lubrication

Differentiation of manual gearbox with and without forced lubrication ⇒ page 1

1 - Clutch module

- Removing and installing ⇒ page 30
- □ Servicing ⇒ page 24

2 - Bolts

- Tightening torque ⇒ page 18
- 3 Clutch slave cylinder with release bearing
 - Removing and installing ⇒ page 19

4 - O-ring

Renew after removing

5 - Circlip

- Insert in circumferential groove in input shaft
- Determining thickness ⇒ page 85

6 - Gearbox housing

- □ With gear cluster (input and output shafts) and selector fork cluster
- Removing and installing gear cluster (input and output shafts), reverse gear wheel and selector fork cluster ⇒ page 59
- Servicing gearbox housing ⇒ page 92
- Removing and installing differential ⇒ page 211

7 - Bolts


- □ Aluminium bolts (M8x22)
- □ Renew after removing
- □ 8 Nm +60°
- 8 Selector shaft with selector mechanism cover
 - □ Removing and installing ⇒ page 89

9 - O-ring

Renew after removing

10 - O-rings

- Renew after removing
- 11 Gear detection sensor G604-
 - Does not have to be removed when dismantling and assembling gearbox
 - □ Installation position ⇒ page 54
 - □ Please refer to installation instructions ⇒ page 54
 - ☐ Can be removed and installed with gearbox installed in vehicle ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Selector mechanism

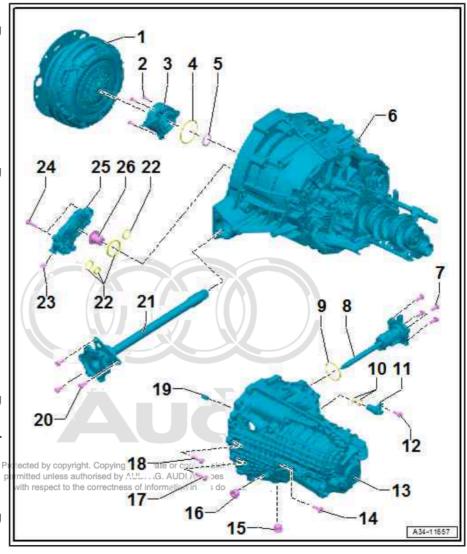

12 - E	Bolt					
	Renew after removing					
	8 Nm +60°					
	Gearbox cover					
	Servicing <u>⇒ page 103</u>					
14 - E	Solt Steel bolts (M8x30)					
	3x					
	Secures bearing mounting to gearbox cover					
	Self-locking					
	Renew after removing 20 Nm +30°					
	oil drain plug Tightening torque <u>⇒ page 94</u>					
	Dil filler plug					
	45 Nm					
17 - E	Bolt					
	Aluminium bolts (M8x55)					
	2x					
	Renew after removing 8 Nm +120°					
_ 18 - E						
	Aluminium bolts (M8x40)					
	15x					
<u> </u>	Renew after removing					
	8 Nm +120°					
	Dowel sleeve 2x					
ے 20 - E						
	Steel bolts (M8x25)					
	3x		, , , ,		part or in whole, is no	
	Tightening torque ⇒ Item 1 (page 170)		s authorised by AUI to the correctness o		e or accept any liabilit yright by AUDI AG.	У
	lange shaft (left-side)					
	With mounting bracket Removing and installing ⇒ page 219					
٥	Renewing mounting bracket and ball bearing ⇒ page 219	page 225				
	O-rings					
	For gear oil pump					
	Renew after removing					
	Allocation ⇒ page 119					
23 - E		tion at manu	ofooturor			
0	For pressure test connection for checking operations of the connection o		nacturer			
ū	Renew after removing	-				
	Tightening torque <u>⇒ page 119</u>					
24 - E						
	Aluminium bolts (M8x40)					



	□ 5x						
	☐ Renew after removing						
	☐ Tightening torque and sequence ⇒ page 119						
25 - 0	25 - Gear oil pump						
	□ Removing and installing ⇒ page 120						
26 - E	6 - Bolt						
	☐ For output shaft						
	☐ Drives gear oil pump						
	☐ Install with locking fluid; for locking fluid refer to ⇒ Electronic	c parts ca	atalogue				
	□ 350 Nm						

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

2.3 Exploded view - gear cluster, reverse gear wheel, selector mechanism

⇒ "2.3.1 Exploded view - gear cluster, reverse gear wheel, selector mechanism, gearbox without forced lubrication", page 58

⇒ "2.3.2 Exploded view - gear cluster, reverse gear wheel, selector mechanism, gearbox with forced lubrication", page 59

2.3.1 Exploded view - gear cluster, reverse gear wheel, selector mechanism, gearbox without forced lubrication


1 - Gearbox housing With differential and pinion shaft 2 - Oil collector (top) Clipped into bearing mounting and opening in gearbox housing 3 - Magnet □ Clean 4 - Gear cluster Consists of input and output shafts with selector fork cluster Dismantling and assembling ⇒ page 122 5 - Reverse gear wheel With reverse shaft ☐ Exploded view - reverse gear wheel ⇒ page 59

A34-11354

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Exploded view - reverse gear wheel


- Thrust washer
- 2 -Reverse gear wheel: Collar points towards gearbox hous-
- 3 -Needle bearing
- Reverse shaft



2.3.2 Exploded view - gear cluster, reverse gear wheel, selector mechanism, gearbox with forced lubrication

- 1 Gearbox housing
 - With differential and pinion shaft
 - ☐ Servicing ⇒ page 96

 Protected by Convenient Copying for p
- 2 O-ringitted unless authorised by AUDI with respect to the correctness of i
 - Renew after removing
- 3 Injection tube for final drive gear set
 - For oil supply to differential
 - Removing and installing ⇒ page 100
- 4 Bolt
 - Renew after removing
 - □ Tightening torque ⇒ Item 15 (page 93)
- 5 O-ring
 - Renew after removing
- 6 Gear oil filter
 - With magnet
 - ☐ Renew when servicing gearbox
- 7 Oil collector
 - □ Remove together with sleeve for input shaft ball bearing ⇒ page 114
 - ☐ Installing <u>⇒ page 115</u>
- 8 Gear cluster
 - Consists of input and output shafts with selector fork cluster
 - □ Dismantling and assembling ⇒ page 122
- 9 Injection tube for gear cluster
 - For oil supply to input and output shaft
- 10 O-ring
 - Renew after removing

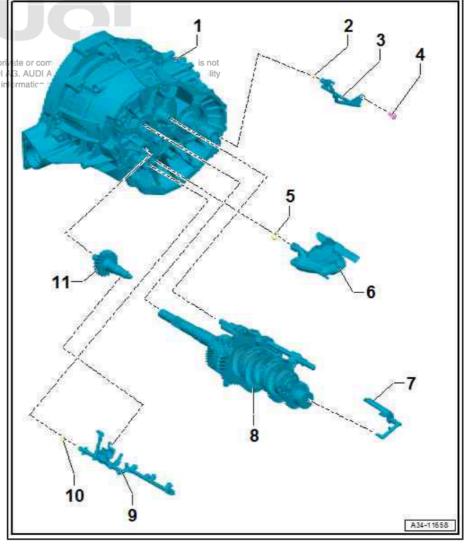


- 11 Reverse gear wheel
 - With reverse shaft
 - Exploded view reverse gear wheel ⇒ page 59

2.4 Exploded view - selector forks



Note


- Installation position of selector plates / selector forks in gearbox ⇒ page 61
- Detaching selector fork cluster from bearing mounting for input shaft and output shaft ⇒ page 122
- 1 Reverse gear selector fork
 - Mounted on selector plate/selector fork for 1st and 2nd gear
- 2 Selector plate / selector fork for 1st and 2nd gear
 - Can be separated from mounting bracket ⇒ Item 4 (page 60)
- 3 Selector plate / selector fork for 3rd and 4th gear
 - With mounting bracket for selector plates/selector forks
 - □ Cannot be separated from mounting bracket ⇒ Item 4 (page 60)
- 4 Mounting bracket
 - Removing and attaching at bearing mounting ⇒ page 122
- 5 Selector plate / selector fork for 5th and 6th gear
 - □ With mounting bracket for selector plates/selector forks
 - □ Cannot be separated from mounting bracket ⇒ Item 4 (page 60)

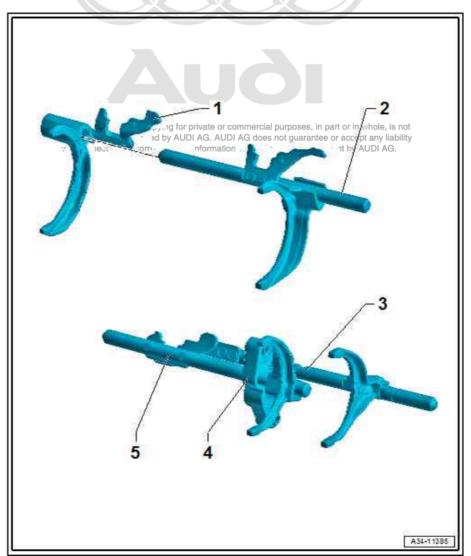



Installation position of selector plates / selector forks in gearbox

- Reverse gear selector fork
- 2 -Selector plate / selector fork for 1st and 2nd gear
- 3 -Selector plate / selector fork for 3rd and 4th gear
- Selector plate / selector fork for 5th and 6th gear



2.5 Dismantling and assembling gearbox

⇒ "2.5.1 Dismantling and assembling gearbox without forced lubrication", page 61

⇒ "2.5.2 Dismantling and assembling gearbox with forced lubrication", page 75

2.5.1 Dismantling and assembling gearbox without forced lubrication

Differentiation:of manual gearbox with and without forced lubri-is not cation authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.


The selector shaft, gearbox cover, input shaft and output shaft are removed and installed together with the internal gearbox selector mechanism.




Note

- The differential does not have to be removed in order to remove the above-mentioned components.
- Refer to general repair instructions ⇒ page 5.


Special tools and workshop equipment required

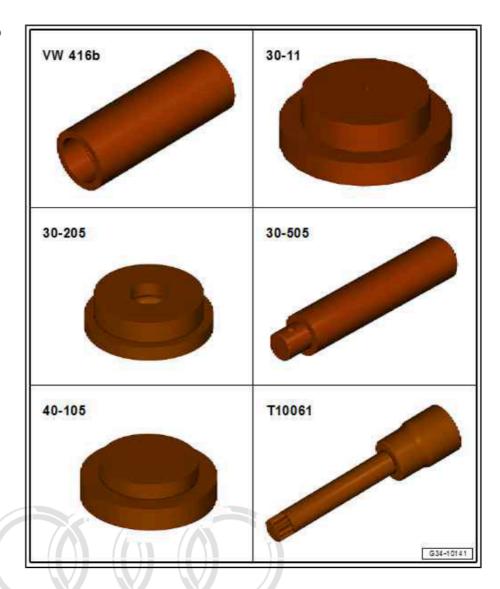

- Tube VW 416 B-
- Thrust plate 30 11-
- Thrust plate 30 205-
- Mandrel 30 505-
- Thrust plate 40 105-
- Socket T10061- Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

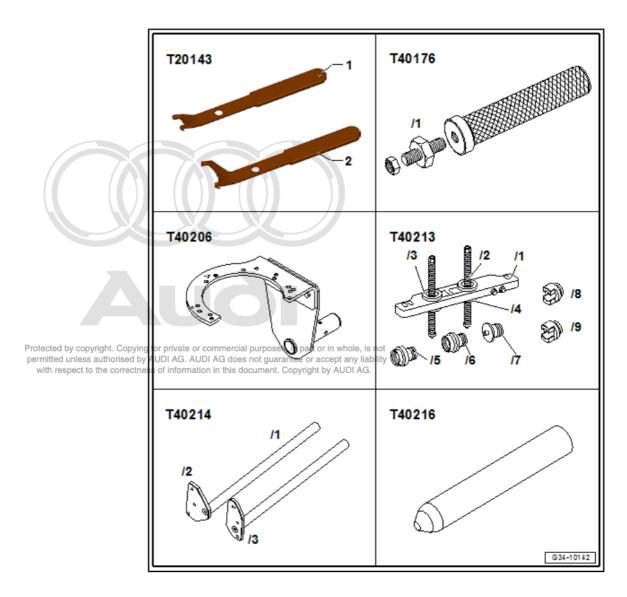

- ♦ Extractor tool T20143-
- ◆ Extractor T40176-
- ♦ Gearbox support T40206-
- Separating tool T40213-
- Support T40214-
- Guide pin T40216-
- ♦ Bit XZN 16 T10198-



- Or T80 Torx key (depending on version)
- Hot air blower V.A.G 1416-



Engine and gearbox support - VAS 6095-



◆ Drip tray for workshop hoist - VAS 6208-




- ◆ Locking fluid ⇒ Electronic parts catalogue
- Sealing paste ⇒ Electronic parts catalogue
 Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not Sealing grease for oil seals ⇒ Electronic parts catalogue by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Dismantling gearbox


Lift gearbox with workshop hoist - VAS 6100- ⇒ page 50.

- Place drip tray underneath.
- Unscrew plug -1- and drain off gear oil.



Secure gearbox to engine and gearbox support ⇒ page 116.

Protected by copyright. Copying for priva permitted unless authorised by AUDI AG with respect to the correctness of infor




Remove clutch module ⇒ page 30 .




Caution

Take care not to damage flange for drive plate on dual-mass flywheel.

- Place clutch module carefully on a work bench -2- with flange -1- facing downwards.
- ◆ Clutch modules with TAC pressure plate must not be placed with the clutch pressure plate facing downwards; otherwise the adjustment mechanism -arrow- may be damaged, which would cause problems with clutch operation.



- Remove bolts -arrows-.
- Carefully take clutch slave cylinder off input shaft together with release bearing -A-.




Remove circlip -arrow- in front of ball bearing for input shaft.




Note

If this circlip cannot be removed, detach the gearbox cover first and knock the input shaft -1- forwards using a rubber-headed hammer.




Protected by copyright. Copying for private or commercial purposes, in part or permitted unless authorised by AUDI AG. AUDI AG does not guarantee or acc


Pierce through centre of sealing cap Aufortoutput shaft and pright by prise out in direction of -arrow-.




Screw guide pin - T40216- onto selector shaft -1-.



Remove bolts -1- and carefully lever off selector shaft cover



Lift selector shaft slightly -arrow A- and pull it out -arrow B-.



Select 1st gear by moving selector plate/selector fork for 1st and 2nd gear -1- in direction of arrow -A-.




Note


- The selector plate -1- is located behind the reverse gear selector fork.
- Rotate input shaft slightly to ensure that the gears shift correctly.
- Next, move rear selector plate -2- in direction of arrow -B- to select 6th gear.
- The input and output shafts are both locked when these two gears are engaged.
- Loosen bolt -1- for output shaft using bit XZN 16 T10198--2- or T80 Torx bit (depending on version) and a suitable ratchet -3- or similar cted by copyright. Copying for private or commercial purposes, in par permitted unless authorised by AUDI AG. AUDI AG does not guarantee or with respect to the correctness of information in this document. Copyrig



Note

- Bolt -1- has a very high release torque (approx. 350 ... 500 Nm).
- 1st gear and 6th gear must be engaged.
- Heat bolt to approx. 100 °C using hot air blower V.A.G 1416-. This will reduce the torque required to release the bolt.
- After dismantling the gearbox, check the seal of the ball bearing in the gearbox housing for damage. Renew ball bearing if necessary.






- Move selector plates to neutral position.
- Then turn gearbox in assembly stand or engine and gearbox support - VAS 6095- so that gearbox cover -3- faces upwards.
- Remove bolts -1- (3x) securing bearing mounting to gearbox cover, and bolts -2- securing gearbox cover -3- to gearbox housing -4-.




Note

When fitting gearbox cover, note that bolts marked with -arrowsare longer.

- Take off gearbox cover -3-.



Remove magnet -1- from gearbox housing and clean magnet.




Detach oil collector -1- from bearing mounting -2- and gearbox housing -arrows A ... C-.



Note


Clean magnet -3- in oil collector.

Protected by copyright. Copying for priva permitted unless authorised by AUDI AG with respect to the correctness of info




- If you have to dismantle the input shaft, now loosen the multipoint socket head bolt -1- in the input shaft by approx. 1/2 turn.
- Engage 1st and 5th gears by moving locking collars -2- and -3- in direction of -arrows-.
- The shafts must be vertical, as shown in illustration.
- The multi-point socket head bolt -1- remains screwed in handtight in the input shaft.
- Then move locking collars back to neutral position copying for private or of permitted unless authorised by AUDI AG. AUD

with respect to the correctness of informatio



Turn gearbox into a horizontal position on assembly stand or engine and gearbox support - VAS 6095- . Reverse gear wheel -1- with reverse shaft -2- then faces upwards.




- Attach separating tool T40213- to gearbox support T40206with bolts -arrow A- and -arrow B-.
- Screw bolt -arrow A- into threaded hole of gearbox support marked "5A".
- Fit bolt -arrow B- in hole of gearbox support marked "14".



Caution

Risk of damage to gears, shafts and bearings.

- The input shaft and output shaft must be pressed out together.
- It is permissible to turn the spindles alternately not more than one turn at a time when pressing out the shafts.
- By turning spindles T40213/2- of separating tool T40213alternately one turn at a time, press input shaft -1- and output shaft out of ball bearings in gearbox housing.





Note

- Support for reverse shaft -1- is guided out of retainer in gearbox housing -arrow B- at the same time.
- housing and detach reverse shaft from bearing mounting -3-



Detach input shaft and output shaft from gearbox housing

-1- together with selector fork cluster -2- and reverse shaft


-4- (if not yet removed).

Protected by copyright. Copying for private or co permitted unless authorised by AUDI AG. AUDI with respect to the correctness of information




Note

- If the input shaft is being serviced, loosen the multi-point socket head bolt -arrow A- ⇒ page 69.
- When re-installing the gear cluster, ensure that the spur gear drive input gear engages with the spur gear drive output gear -3- -arrow B-.
- Detach separating tool T40213- from gearbox support -T40206- .



Assembling gearbox

- Install input shaft -1- and output shaft together with selector fork cluster -2- and reverse shaft -4- in gearbox housing.
- Ensure that the spur gear drive input gear engages with the spur gear drive output gear -3- -arrow B-.
- If previously removed, screw in multi-point socket head bolt -arrow A- hand-tight.




- Screw adapter T40214/1- into support T40214/3-, and adapter - T40214/2- into support - T40214/4-
- Secure support T40214/1- with adapter T40214/3- and support - T40214/2- with adapter - T40214/4- to gearbox housing, as shown in illustration.
- Attach plate T40213/1- to supports T40214/1- and -T40214/2- .
- Insert thrust plate 40 105- into output shaft opening.



Caution

Risk of damage to gears, shafts and bearings.


- The input shaft and output shaft must be pressed in together.
- It is permissible to turn the spindles alternately not more than one turn at a time when pressing in the shafts.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does

Reverse shaft -1- must be locked in place in bearing mounting in this -3- -arrow A- when pressing in gear cluster.

- Guide reverse shaft -1- into hole in gearbox housing -arrow A-.
- If necessary, push reverse gear selector fork -2- towards gearbox housing so that reverse gear wheel is seated correctly in teeth of input shaft.
- Detach separating tool T40213- and supports T40214-.
- If you have dismantled the input shaft, now apply locking fluid to the multi-point socket head bolt -1- in the input shaft; for locking fluid, refer to ⇒ Electronic parts catalogue. Then tighten the multi-point socket head bolt to specified torque.
- To do this, engage 2 gears by moving locking collars -2- and -3- in direction of -arrow-.
- Then move locking collars back to neutral position.








Insert oil collector -1- into gearbox housing -arrow A- and clip onto bearing mounting -2- -arrows B, C-.




Note

The magnet -3- in the oil collector must be clean.



- Fit cleaned magnet -1- in gearbox housing.
- Check that the two dowel sleeves for centring gearbox cover and gearbox housing are fitted in gearbox housing.
- Apply sealing paste (refer to ⇒ Electronic parts catalogue) evenly and not too thickly onto surface between gearbox housing and gearbox cover.




Fit gearbox cover -3- onto gearbox housing -4-.



Note

- To avoid damaging the roller bearing ⇒ Item 9 (page 95) for the output shaft in the gearbox cover, turn the gearbox cover back and forth somewhat when fitting it. ng for private or commercial purpose
- Hold onto the gearbox cover until it is resting against the gear quantil. box housing; do not use force.
- Fit new bolts -1- (3x) and screw them hand-tight into bearing mounting.
- Tighten new aluminium bolts -2- to specified torque; note that 2 bolts -arrows- are longer.
- Then tighten bolts -1- to specified torque.



Determine thickness of circlip -arrow- for input shaft -1- as follows:

Determine the thickest circlip that will just fit and install it. For part number refer to ⇒ Electronic parts catalogue.



Note

Start with the thickest circlip.

The following circlips are available:


Circlip thickness (mm)				
3.44	3.47	3.50		


Select 1st gear by moving selector plate/selector fork for 1st and 2nd gear -1- in direction of arrow -A-.




Note

- The selector plate right. So you all provide him the late was in part or in whole, is the selector plate right of accept any liable and the selector plate right of accept any liable selector plate right of accept any liable selector and liable selectors. lector forkan respect to the correctness of information in this document. Copyright by AUDI AG
- Rotate input shaft slightly to ensure that the gears shift correctly.
- Next, move rear selector plate -2- in direction of arrow -B- to select 6th gear.
- The input and output shafts are both locked when these two gears are engaged.
- Clean thread of bolt -1- for output shaft with a wire brush. Then install bolt with locking fluid (refer to ⇒ Electronic parts catalogue) and tighten to specified torque with bit XZN 16 -T10198- -2- or T80 Torx key (depending on version).
- 3 Torque wrench











Caution

The sealing cap can only be fitted properly if the outer circumference has not been lubricated.


- Do not use additional lubricant on outer circumference of new sealing cap for installation.
- Drive in new sealing cap for output shaft until flush.




- Clean locking fluid residue from threaded holes for securing selector shaft in gearbox cover (residue can be removed using a thread tap).
- Fit new O-ring on selector shaft cover -2-.
- Screw guide pin T40216- onto selector shaft -1-.




Pack space between sealing lips -arrow- of selector shaft oil seal half-full with sealing grease for oil seals; for sealing grease, refer to ⇒ Electronic parts catalogue.




Lift selector shaft slightly -arrow B- and install it in gearbox Pattowo Arpyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




- Selector shaft cover -2- must make contact with gearbox hous-
- Tighten new bolts -1- to specified torque.



Unscrew guide pin - T40216- from selector shaft -1-.




Renew O-ring -1- for release bearing -2-.



Install clutch slave cylinder -A- with release bearing -arrows-⇒ page 19 .







- Install clutch module and flange shaft (left-side) ⇒ page 33.
- Fill up oil in gearbox; for capacities and specifications, refer to ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 00; Technical data.

Tightening torques

- ♦ ⇒ "1.1 Exploded view clutch release mechanism", page 18
- ♦ ± "2.1 Exploded view input shaft", page 133
- ♦ 3.1 Exploded view output shaft", page 147
- ⇒ "2.2.1 Exploded view gearbox without forced lubrication", page 52



Differentiation of manual gearbox with and without forced lubrication ⇒ page 1






The selector shaft, gearbox cover, input shaft and output shaft are removed and installed together with the internal gearbox selector mechanism.




Note

The differential does not have to be removed in order to remove the above-mentioned components.

Special tools and workshop equipment required

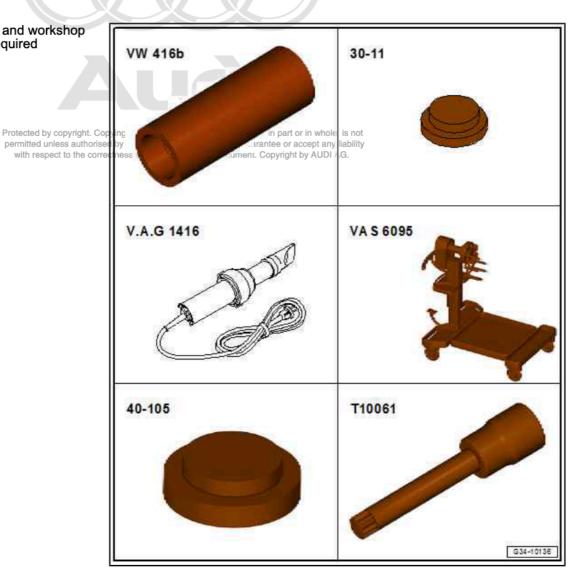

- Tube VW 416 B-
- Thrust plate 30 11-
- Hot air blower V.A.G 1416-
- Engine and gearbox support VAS 6095-
- Thrust plate 40 105-
- Socket T10061-

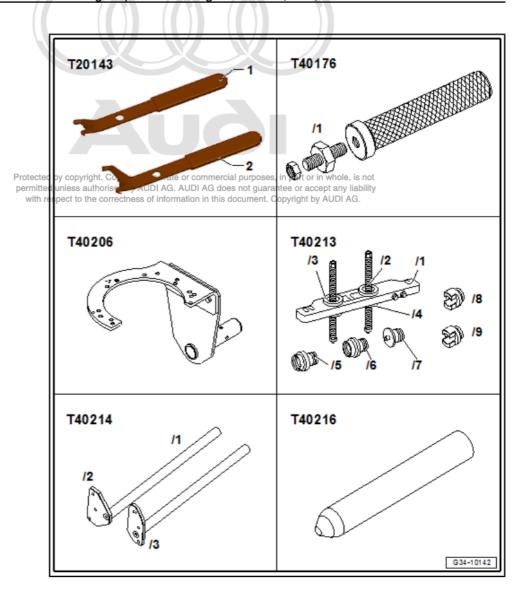


- ♦ Extractor tool T20143-
- ◆ Extractor T40176-
- ♦ Gearbox support T40206-
- ♦ Separating tool T40213-
- Support T40214-
- Guide pin T40216-
- ◆ Drip tray for workshop hoist VAS 6208-




- T80 Torx bit
- Lever
- Locking fluid ⇒ Electronic parts catalogue
- Sealing paste ⇒ Electronic parts catalogue
- Sealing grease for oil seals ⇒ Electronic parts catalogue

Dismantling gearbox

- Lift gearbox with workshop hoist VAS 6100- ⇒ page 50.
- Place drip tray underneath.
- Unscrew oil drain plug -1- and drain off gear oil.



Secure gearbox to engine and gearbox support ⇒ page 116.



Remove clutch module ⇒ page 30.




Caution


Take care not to damage flange for drive plate on dual-mass flywheel.

Protected by o


- Place clutch module carefully on a work bench -2- with flange -1- facing downwards.
- Clutch modules with TAC pressure plate must not be placed with the clutch pressure plate facing downwards; otherwise the adjustment mechanism -arrow- may be damaged, which would cause problems with clutch operation.



- Unscrew bolts -1- for gear oil pump.
- Detach gear oil pump -2-.



- Remove bolts -arrows-.
- Carefully take clutch slave cylinder off input shaft together with release bearing -A-.




Remove circlip -arrow- in front of ball bearing for input shaft.




Note

If this circlip cannot be removed, detach the gearbox cover first and knock the input shaft -1- forwards using a rubber-headed hammer.




Screw guide pin - T40216- onto selector shaft -1-.


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



 Remove bolts -1- and carefully lever off selector shaft cover -2-.



Lift selector shaft slightly -arrow A- and pull it out -arrow B-.



 Select 1st gear by moving selector plate/selector fork for 1st and 2nd gear -1- in direction of arrow -A-.




Note


- ◆ The selector plate -1- is located behind the reverse gear selector fork.
- Rotate input shaft slightly to ensure that the gears shift correctly.
- Next, move rear selector plate -2- in direction of arrow -B- to select 6th gear.
- The input and output shafts are both locked when these two gears are engaged.
- Loosen bolt -1- for input shaft using T80 Torx bit -2- and a suitable ratchet -3- or similar.



Note

- Bolt -1- has a very high release torque (approx. 350 ... 500 Nm).
- 1st gear and 6th gear must be engaged.
- ♦ Heat bolt to approx. 100 °C using hot air blower V.A.G. The or in who This will reduce the torque required to release the bolt opyright by AUD
- After dismantling the gearbox, check the seal of the ball bearing in the gearbox housing for damage. Renew ball bearing if necessary.






- Move selector plates to neutral position.
- Then turn gearbox in assembly stand or engine and gearbox support - VAS 6095- so that gearbox cover -3- faces upwards.
- Unscrew bolts -1- securing bearing mounting to gearbox cover (3x) and bolts -2- securing gearbox cover -3- to gearbox housing -4-.



Note

When fitting gearbox cover, note that bolts marked with -arrowsare longer.

- Take off gearbox cover -3-.




Lever out gear oil filter -1- using assembly lever -A-.




Note

Protected by copyright. Copying for private or commercial purposes, in part or permitted unless authorised by AUDI AG. AUDI AG does not guarantee or ac with respect to the correctness of information in this document. Copyright b


Renew gear oil filter when servicing gearbox.




Release retaining tabs -arrows A- and press injection tube for gear cluster -1- out of gearbox housing -2- in direction of -arrow B-.



- Pull injection tube for gear cluster -1- out of guide -arrow A- on bearing mounting -2-.
- Then pull injection tube for gear cluster -1- off reverse shaft -3- -arrow B-.




- If you have to dismantle the input shaft, now loosen the multipoint socket head bolt -1- in the input shaft by approx. 1/2 turn.
- Engage 1st and 5th gears by moving locking collars -2- and -3- in direction of -arrows-.
- The shafts must be vertical, as shown in illustration.
- The multi-point socket head bolt -1- remains screwed in handtight in the input shaft.
- Then move locking collars back to neutral position.



Turn gearbox into a horizontal position on assembly stand or engine and gearbox support - VAS 6095- . Reverse gear wheel -1- with reverse shaft -2- then faces upwards.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




- Attach separating tool T40213- to gearbox support T40206with bolts -arrow A- and -arrow B-.
- Screw bolt -arrow A- into threaded hole of gearbox support marked "5A".
- Fit bolt -arrow B- in hole of gearbox support marked "14".



Caution

Risk of damage to gears, shafts and bearings.

- The input shaft and output shaft must be pressed out together.
- It is permissible to turn the spindles alternately not more than one turn at a time when pressing out the shafts.
- By turning spindles T40213/2- of separating tool T40213alternately one turn at a time, press input shaft -1- and output shaft out of ball bearings in gearbox housing.





Note

- Support for reverse shaft -1- is guided out of retainer in gearbox housing -arrow B- at the same time.
- It may now already be possible to remove the reverse shaft. To do so, push reverse gear selector fork -2- towards gearbox housing and detach reverse shaft from bearing mounting -3--arrow A-.
- Detach input shaft and output shaft from gearbox housing -1- together with selector fork cluster -2- and reverse shaft -4- (if not yet removed).



Note

- If the input shaft is being serviced, loosen the multi-point socket head bolt -arrow A- ⇒ page 82 .
- When re-installing the gear cluster, ensure that the spur gear drive input gear engages with the spur gear drive output gear -3- -arrow B-.


Protected by copyright. Copying for private or commercial purposes, in part or in who

Detach separating tool to T40213 from gearbox supported or accept an T40206- .

2

Assembling gearbox

- Install input shaft -1- and output shaft together with selector fork cluster -2- and reverse shaft -4- in gearbox housing.
- Ensure that the spur gear drive input gear engages with the spur gear drive output gear -3- -arrow B-.
- If previously removed, screw in multi-point socket head bolt -arrow A- hand-tight.



- Screw adapter T40214/1- into support T40214/3-, and adapter - T40214/2- into support - T40214/4-.
- Secure support T40214/1- with adapter T40214/3- and support - T40214/2- with adapter - T40214/4- to gearbox housing, as shown in illustration.
- Attach plate T40213/1- to supports T40214/1- and -T40214/2- .
- Insert thrust plate 40 105- into output shaft opening.





Caution


Risk of damage to gears, shafts and bearings.

- The input shaft and output shaft must be pressed in together.
- It is permissible to turn the spindles alternately not more than one turn at a time when pressing in the shafts.
- Then, by turning spindles T40213/2- alternately one turn at a time, press in input shaft and output shaft until they are seated in ball bearings. When doing so, pay attention to reverse shaft -3- and ensure that teeth on output shaft engage in spur gear drive output gear -2-.
- Reverse shaft -1- must be locked in place in bearing mounting -3- -arrow A- when pressing in gear cluster.
- Guide reverse shaft -1- into hole in gearbox housing -arrow A-.
- If necessary, push reverse gear selector fork -2- towards gearbox housing so that reverse gear wheel is seated correctly in teeth of input shaft.
- Detach separating tool T40213- and supports T40214-.
- If input shaft has been dismantled, clean thread of bolt -1- for input shaft with a wire brush.
- Engage two gears by moving locking collars -2- and -3- in direction of -arrow-.
- Coat multi-point socket head bolt with locking fluid (⇒ Electronic parts catalogue) and tighten to specified torque.
- Then move locking collars back to neutral position of for private or comme

permitted unless authorised by AUDI AG. AUDI AG do with respect to the correctness of information in this








- Renew O-ring ⇒ Item 10 (page 59) for injection tube for gear cluster -1-.
- Press injection tube for gear cluster -1- onto reverse shaft -3- -arrow B-.
- Then slide guide -arrow A- into hole in bearing mounting -2-.
- Slide injection tube for gear cluster into gearbox housing until it engages audibly.
- A34-11667


- Renew seal -3- for gear oil filter -1-.
- Insert gear oil filter -1- in gearbox housing -2-.
- Check that the two dowel sleeves for centring gearbox cover and gearbox housing are fitted in gearbox housing.
- Apply sealing paste (refer to ⇒ Electronic parts catalogue) evenly and not too thickly onto surface between gearbox housing and gearbox cover.



Fit gearbox cover -3- onto gearbox housing -4-.



- To avoid damaging the roller bearing ⇒ Item 9 (page 95) for the output shaft in the gearbox cover, turn the gearbox cover back and forth somewhat when fitting it.
- Hold onto the gearbox cover until it is resting against the gearbox housing; do not use force.
- Fit new bolts -1- (3x) and screw them hand-tight into bearing mounting.
- Tighten new bolts -2- to specified torque; note that two bolts -arrows- are longer.
- Tighten bolts -1- to specified torque.



Determine thickness of circlip -arrow- for input shaft -1- as follows:


Determine the thickest circlip that will just fit and install it. For part number refer to ⇒ Electronic parts catalogue.




Note

Start with the thickest circlip.

The following circlips are available:







Select 1st gear by moving selector plate/selector fork for 1st and 2nd gear -1- in direction of arrow -A-.



Note

- The selector plate -1- is located behind the reverse gear selector fork.
- Rotate input shaft slightly to ensure that the gears shift correctly.
- Next, move rear selector plate -2- in direction of arrow -B- to select 6th gear.
- The input and output shafts are both locked when these two gears are engaged.
- Clean thread of bolt -1- for output shaft with a wire brush.
- Fit bolt with locking fluid (⇒ Electronic parts catalogue) and tighten to specified torque using T80 Torx bit -2-.
- 3 Torque wrench







Renew O-ring -1- for release bearing -2-.



Protected by copyright. Copying for private or permitted unless authorised by AUDI AG. AUD with respect to the correctness of information

- Install clutch slave cylinder with release bearing -A- -arrows-⇒ page 19 .





- Insert seals for gear oil pump -1-.

Allocation of seals for gear oil pump ⇒ page 119




Note

The seals for the gear oil pump have to be renewed after removal.


Fit gear oil pump -2- onto gearbox and tighten new bolts -1- in specified sequence ⇒ page 119.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.





- Fit new O-ring on selector shaft cover -2-.
- Screw guide pin T40216- onto selector shaft -1-.













Lift selector shaft slightly -arrow B- and install it in gearbox -arrow A-.



- Selector shaft cover -2- must make contact with gearbox hous-
- Tighten new bolts -1- to specified torque.




- Unscrew guide pin T40216- from selector shaft -1-.
- Fill up gear oil ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Gear oil; Draining and filling gear oil.



Note

Capacities and specifications ⇒ 6-speed manual gearbox 0CS, ODJ, OCX; Rep. gr. 00 ; Technical data

> Protected by copyright. Cop permitted unless authoris with respect to the cor




After filling up gear oil, rotate gearbox 360° at engine and gearbox support - VAS 6095- .



Caution


Risk of damage to gearbox!

- Failing to rotate the gearbox can lead to damage to the gear cluster and bearings.
- The gear oil must be distributed evenly in the gearbox.






- Install clutch module and flange shaft (left-side) ⇒ page 33. Tightening torques
- ♦ ⇒ "1.1 Exploded view clutch release mechanism", page 18
- ⇒ "2.1 Exploded view input shaft", page 133
- ⇒ "3.1 Exploded view output shaft", page 147
- ⇒ "2.2.2 Exploded view gearbox with forced lubrication", page 55
- ⇒ "5.2 Exploded view gear oil pump", page 119



2.6 Removing and installing selector shaft


Special tools and workshop equipment required

♦ Guide pin - T40216-




- ◆ Sealing grease for oil seals ⇒ Electronic parts catalogue Removing
- Screw guide pin T40216- onto selector shaft -1-.

Copying for private or commercial pu permitted unless authorised by AUDI AG. AUDI AG does no with respect to the correctness of information in this docu



Remove bolts -1- and carefully lever off selector shaft cover -2-.





Lift selector shaft slightly -arrow A- and pull it out -arrow B-.





Installing


- Clean locking fluid residue from threaded holes for securing selector shaft in gearbox cover (residue can be removed using a thread tap).
- Fit new O-ring on selector shaft cover -2-.
- Screwiguide pinria T40216 onto selector shaft 14. in part or in whole, is not with respect to the correctness of information in this document. Copyright by AUDI AG.


















- Selector shaft cover -2- must make contact with gearbox hous-
- Fit and tighten new bolts -1-.



- Unscrew guide pin T40216- from selector shaft -1-. Tightening torques
- ♦ "2.2.2 Exploded view gearbox with forced lubrication", page 55





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

3 Gearbox housing, clutch housing

- ⇒ "3.1 Exploded view gearbox housing", page 92
- ⇒ "3.2 Exploded view gearbox housing cover", page 94
- ⇒ "3.3 Servicing gearbox housing", page 96
- ⇒ "3.4 Servicing gearbox housing cover", page 103

3.1 Exploded view - gearbox housing



- ☐ For flange shaft (left-
- Removing and installing <u>⇒ page 158</u>

2 - Differential

- □ Renewing bearing for differential ⇒ page 210
- 3 O-ring
 - Renew after removing
 - Lubricate with gear oil
- 4 Cover for final drive
 - □ Renewing ⇒ page 203
- 5 Bolt
 - ☐ Steel bolts (M8x43)
 - □ 12x
 - □ Tightening torque ⇒ Item 8 (page 170)
- 6 Flange shaft (right-side)
 - Removing and installing ⇒ page 223

7 - Circlip

- □ For flange shaft (right-
- Renew after removing

8 - Oil seal

- ☐ For flange shaft (rightside)
- Removing and installing ⇒ page 162

9 - Cap


For gearbox breather

10 - Breather pipe

- Clip in cap for gearbox breather
- ☐ Installation depth ⇒ page 99

11 - Pinion shaft

- □ Removing and installing ⇒ page 172
- 12 Spur gear drive output gear
 - ☐ Note correct position: Reinforcement ribs face towards gearbox cover
 - □ Removing ⇒ page 100

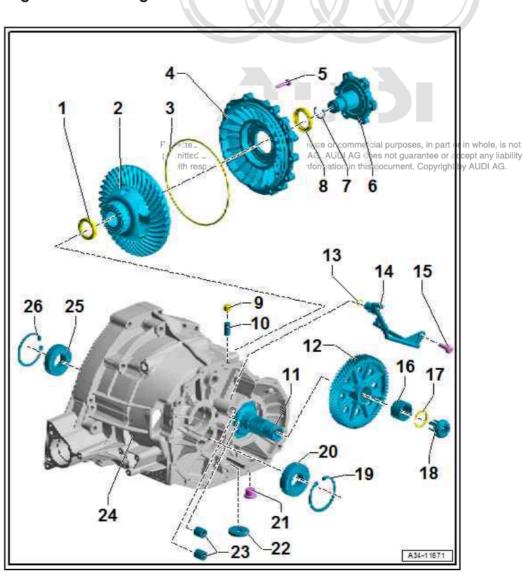


☐ Insta	alling <u>⇒ page 101</u>
13 - O-ring	
☐ Ren	ew after removing
14 - Injecti	on tube for final drive gear set
	oil supply to differential
	nual gearboxes with forced lubrication only
	noving and installing <u>⇒ page 100</u>
15 - Bolt	used as substant with forced lubrication only
	nual gearboxes with forced lubrication only ew after removing
□ 8 Nr	
16 - Inner	race
	roller bearing on pinion shaft
	noving <u>⇒ page 100</u>
Insta	alling ⇒ page 101
17 - Circlip	ı
☐ Re-	determining thickness <u>⇒ page 102</u>
18 - Clip	
	e off pinion shaft carefully e.g. with a screwdriver
	nto pinion shaft by hand
	d not be refitted/renewed if damaged
19 - Circlip Inst	o allation position ⇒ <u>page 103</u>
20 - Ball b	
	output shaft
	ssing out ⇒ page 102
	ssing in <u>⇒ page 102</u>
21 - Oil dra	ain plug
☐ Tigh	itening torque <u>⇒ page 94</u>
22 - Magn	et
	iuai gearboxes without forced lubrication only
☐ Clea	in
23 - Ball sl	
	selector plate / selector fork
□ 2x	acting + page 00
	noving <u>⇒ page 99</u> alling ⇒ <mark>page 100</mark>
	oox housing cover
25 - Ball bo For □	input shaft
Protected pe Pres	l by copyright. Copying for private or commercial purposes, in part or in whole, is not SSING: OUT: ∷page ∪1 <mark>103</mark> . AUDI AG does not guarantee or accept any liability
	spect to the correctness of information in this document. Copyright by AUDI AG. SSING IN ⇒ page 103
26 - Circlip	
☐ Insta	allation position ⇒ page 103

Tightening torques for oil drain plugs


- I Manual gearbox without forced lubrication
- Oil drain plug -arrow A- is located in gearbox housing
- 45 Nm
- II Manual gearbox with forced lubrication
- Oil drain plug -arrow B- is located in gearbox cover
- Additional opening in gearbox housing with sealing plug -arrow C-
- 45 Nm

Protected by copyright. Copying for private or comme permitted unless authorised by AUDI AG. AUDI AG of with respect to the correctness of information in th



3.2 Exploded view - gearbox housing cover

- 1 Large locking bush
 - For selector shaft
 - Removing and installing ⇒ page 109
 - ☐ Installation depth ⇒ page 109
- 2 Locking bushes
 - ☐ For selector plate / selector fork
 - □ Removing ⇒ page 110
 - □ Driving in ⇒ page 110
- 3 Gearbox housing cover
 - Servicing ⇒ page 103
- 4 Oil seal
 - For output shaft
 - Only for gearbox on vehicles with four-wheel drive
 - □ Renewing ⇒ page 166
- 5 Sealing cap
 - Only for gearbox on vehicles with front-wheel drive
 - Renew after removing
 - Do not use additional lubricant on outer circumference for installation
 - □ Renewing with gearbox installed ⇒ 6-speed manual gearbox 0CS 0DJ, 0CX; Rep. gr. 39; Oil seals; Renewing oil seal (right-side)
 - □ Removing ⇒ page 112

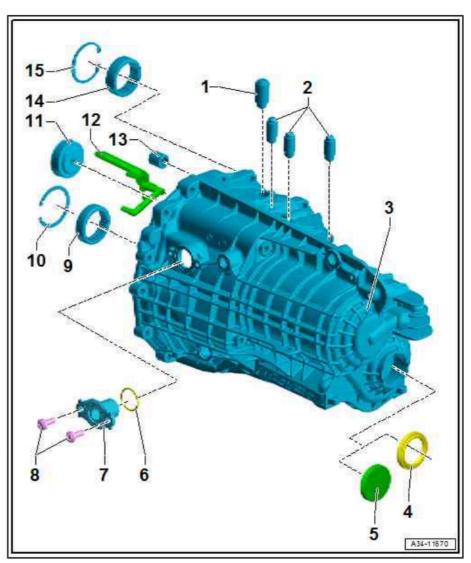




u	Installing ⇒ page 112
6 - O-	ring
	Renew after removing
7 - Be	earing cover
	Exploded view ⇒ page 110
	Removing and installing oil seal for selector shaft ⇒ page 110
	Removing ball sleeve for selector shaft <u>⇒ page 111</u>
	Installing ball sleeve for selector shaft <u>⇒ page 111</u>
8 - Bo	olt
	Aluminium bolts (M8x22)
	Renew after Pernoving opyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.
9 - Ro	oller bearing
	Bearing for output shaft
	Pressing out on vehicles with front-wheel drive ⇒ page 112
	Pressing out on vehicles with four-wheel drive ⇒ page 113
	Pressing in ⇒ page 113
10 - C	Circlip
11 - S	Sleeve
	For input shaft ball bearing
	Renew after removing
	Removing ⇒ page 114
	Pressing in ⇒ page 114
	Dil collector
_	Only for gearbox with forced lubrication
u	Installing ⇒ page 115
	Ball sleeve
	For 3rd/4th gear selector plate / selector fork
	Removing ⇒ page 113
	Driving in <u>⇒ page 114</u>
	Roller bearing
	For pinion shaft
	Pulling out <u>⇒ page 114</u> Driving in <u>⇒ page 114</u>
10 - C	Circlip


3.3 Servicing gearbox housing

Special tools and workshop equipment required

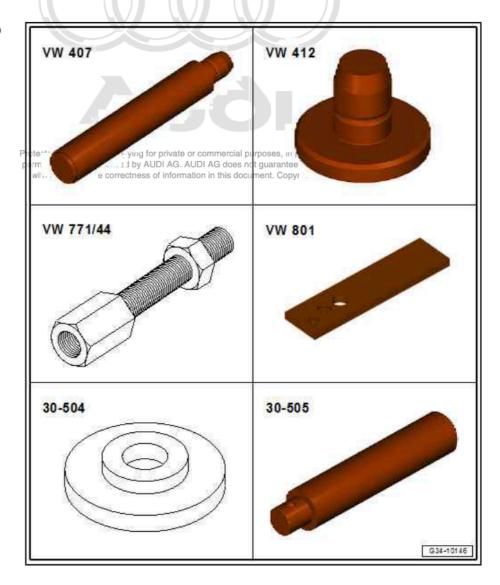


- Press tool VW 407-
- Press tool VW 412-
- Adapter VW 771/44- from multi-purpose tool set VW 771-
- Retaining plate VW 801-
- Press tool 30 504-
- Mandrel 30 505-




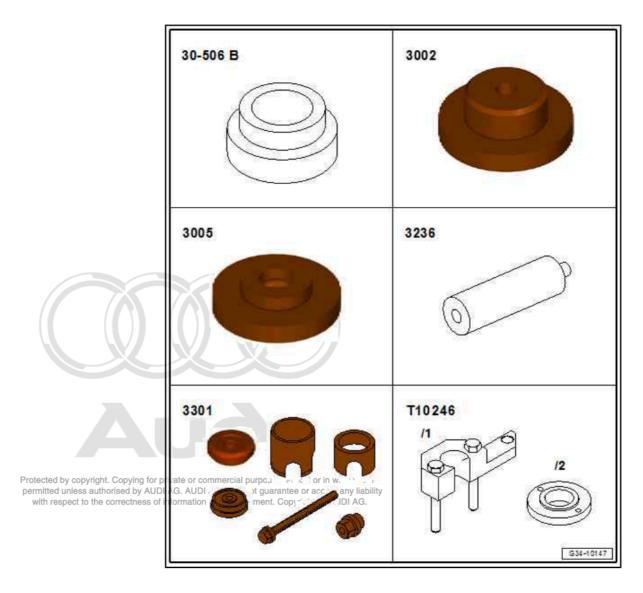


- ♦ Press tool 30 506 B-
- Thrust piece 3002-
- Thrust plate 3005-
- Thrust piece 3236-
- Assembly tool 3301-
- ♦ Fitting tool T10246-

 Pressure sleeve -T40103-






 Assembly tool -T40213-



Hot air blower - V.A.G 1416-



 Inductive heater -VAS 6414-




Audi

copyright. Copying for private or commercial purposes, in part or in whole, is not ass authorised by AUDI AG. AUDI AG does not guarantee or accept any liability t to the correctness of information in this document. Copyright by AUDI AG. Press tool - VW412-



-1- Internal puller -VAS 251 605 (Kukko 21-2)-

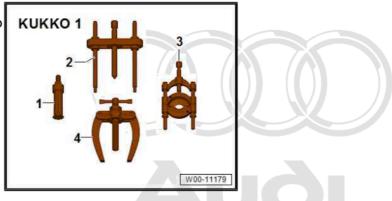

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability

with respect to the correctness of information in this document. Copyright by AUDI AG.

- -2- Puller VAS 251 417 (Kukko 18-1)-
- ◆ -2- Puller VAS 251 419 (Kukko 18-2)-
- -4- Counter-support -VAS 251 621 (Kukko 22-1)-
- ♦ 2 M14 x 1.5 nuts or M14 x 1.5 wheel nuts
- 1 M14 nut with wash-

Installation dimension of breather pipe

Dimension -a- = 21 mm


Pulling out ball sleeve -1- for selector plate/selector fork

- 2 Internal puller VAS 251 605 (Kukko 21-2)-
- 3 Counter-support VAS 251 621 (Kukko 22-1)-



Note

To remove the ball sleeve for the 5th/6th gear selector plate/selector fork, also place the pad - T10246/2- from the fitting tool -T10246- on the gearbox housing, as shown in illustration.



Pressing in ball sleeve for selector plate/selector fork (press in until flush)



Note

- To ensure that the gearbox lies parallel on the work table, position plate T40213/1- and support plate VW 801- on edge underneath.
- The ball sleeve can also be driven in flush with the gearbox housing attached to the gearbox support - T40206-.

T40213/1 VW 801 A34-11424

VW 412 3236

Pulling spur gear drive output gear -1- off pinion shaft together with sleeve -2-. Protected by copyright. Copy

Before pulling out:


- Remove clip ⇒ Item 18 (page 93) and circlip ⇒ Item 17 (page 93) from pinion shaft.
- 3 Puller VAS 251 419 (Kukko 18-2)-
- 4 M14 x 1.5 nut or M14 x 1.5 wheel nut
- Attach puller -3- to spur gear drive output gear -1- with nuts
- Heat spur gear drive output gear -1- to approx. 100 °C using hot air blower - V.A.G 1416- or similar.
- Counterhold at puller -arrow- when pulling off.



Caution


Risk of damage to gearbox housing and injection tube for final drive gear set.

The nuts -4- on the puller must not make contact with the ribs of the housing or the injection tube for final drive gear set.

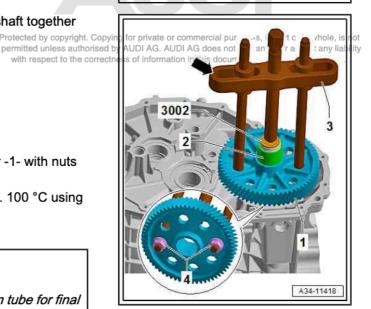

Removing and installing injection tube for final drive gear set -1-Before removing:

- Pull off spur gear drive output gear ⇒ page 100.
- Remove bolt -2-.
- Release injection tube for final drive gear set -arrows A- and pull it out of gearbox housing in direction of -arrow B-.




Guide injection tube for final drive gear set -1- out of hole in gearbox housing; pay attention to nozzle -arrow- while doing SO.



Note

Always renew O-ring ⇒ Item 13 (page 93) for injection tube for final drive gear set.

Installation is carried out in reverse sequence.




permitted unless authorise with respect to the corre


Pressing on spur gear drive output gear -3-

- Use inductive heater VAS 6414- to heat spur gear drive output gear -3- to approx. 140 °C and fit it in installation position on pinion shaft.
- Installation position of spur gear drive output gear: Reinforcement ribs -arrow A- face upwards.
- Attach one spindle -1- of puller VAS 251 417 (Kukko 18-1)to adapter - VW 771/44- -5- and insert it into access hole in pinion shaft.
- Next, push nut -4- (M10) on until thread is flush with adapter -VW 771/44- .
- Then use nut -2- (M14) with washer to press spur gear drive output gear on as far as stop. When doing so, counterhold at hexagon flats of spindle -1- -arrow B-.

Pressing roller bearing inner race onto pinion shaft

- Spur gear drive output gear must be pressed on as far as stop.
- Use inductive heater VAS 6414- to heat roller bearing inner race -3- to approx. 100 °C and fit it onto pinion shaft.
- Attach one spindle -1- of puller VAS 251 417 (Kukko 18-1)to adapter - VW 771/44- -5- and insert it into access hole in pinion shaft.
- Push nut -4- (M10) on until thread is flush with adapter VW 771/44- .
- Then use nut -2- (M14) with washer to press inner race on as far as stop. When doing so, counterhold at hexagon flats of spindle -1-.
- After this, it is necessary to re-determine the required thickness of the shim \Rightarrow Item 17 (page 93), \Rightarrow page 102.





Selecting correct circlip for roller bearing inner race on pinion shaft



Note

- Roller bearing inner race is pressed on to stop.
- The illustration shows a different component, but the procedure for selecting the circlip is the same.
- Determine the thickest circlip that will just fit and install it. For part number refer to ⇒ Electronic parts catalogue .

The following circlips are available:

Circlip thickness (mm)				
2.39	2.43	2.46		
2.49	2.52	2.55		

Pressing output shaft ball bearing out of gearbox housing


Berotected by copyright. Copying for private or commercial purposes, in part or in whole, is not performed purposes. In part or in whole, is not performed purposes and observe by AUDI AG. AUDI AG does not guarantee or accept any liability

win respect to the correctness of information in this document. Copyright by AUDÍ AG. Remove circlip for ball bearing <u>⇒ Item 19 (page 93)</u>



Note

- To ensure that the gearbox lies parallel on the work table, position plate - T40213/1- and support plate - VW 801- on edge underneath.
- The ball bearing can also be driven out with the gearbox housing attached to the gearbox support - T40206-.




Pressing output shaft ball bearing carefully into gearbox housing (press in onto stop)



Note

- To ensure that the gearbox lies parallel on the work table, position plate - T40213/1- and support plate - VW 801- on edge underneath.
- The ball bearing can also be driven in onto stop with the gearbox housing attached to the gearbox support - T40206- .
- Then fit circlip for ball bearing ⇒ Item 19 (page 93); note correct installation position of circlip ⇒ page 103.






Pressing input shaft ball bearing out of gearbox housing Before pressing out:

Remove circlip for ball bearing ⇒ Item 26 (page 93).



Note

- To ensure that the gearbox lies parallel on the work table, position plate T40213/1- and support plate VW 801- on edge underneath.
- The ball bearing can also be driven out with the gearbox housing attached to the gearbox support - T40206- .



Pressing input shaft ball bearing into gearbox housing (press in carefully onto stop)



Note


- To ensure that the gearbox lies parallel on the work table, position plate - T40213/1- and support plate - VW 801- on edge underneath.
- The ball bearing can also be driven in onto stop with the gearbox housing attached to the gearbox support - T40206- .
- Then fit circlip for ball bearing ⇒ Item 26 (page 93); note correct installation position of circlip ⇒ page 103.


Installation position of circlips -1- for ball bearings -2-

The chamfer on the circlip faces away from the ball bearings. The smooth side faces the ball bearings.



- Do not interchange the circlips for the ball bearings of the input shaft and output shaft.
- The circlip for the output shaft has a larger diameter.
- The illustration shows the circlip for the ball bearing of the output shaft.







3.4 Servicing gearbox housing cover

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Special tools and workshop equipment required

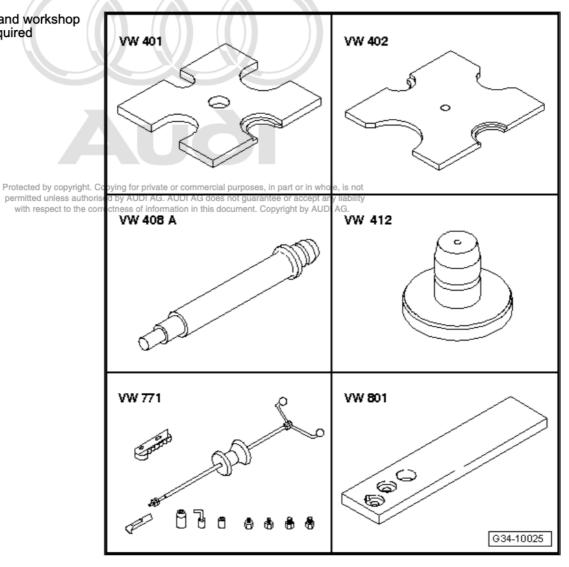


- Thrust plate VW 401-
- Thrust plate VW 402-
- Press tool VW 408 A-
- Press tool VW 412-
- Multi-purpose tool VW 771-
- Retaining plate VW 801-

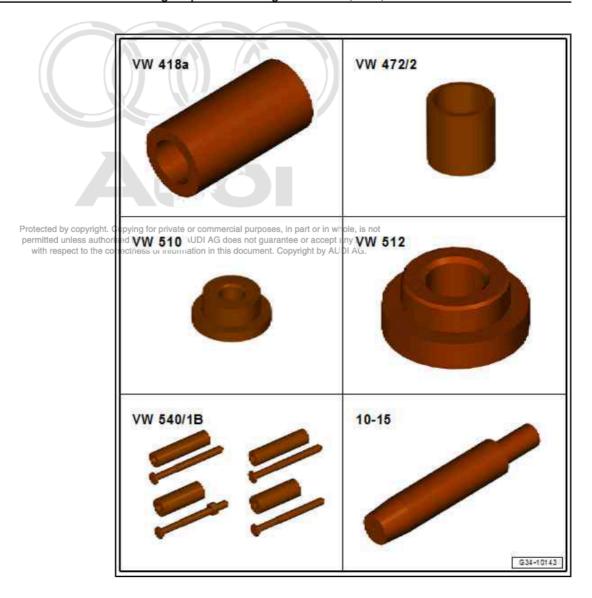

- ♦ Tube VW 418 A-
- ♦ Sleeve VW 472/2-
- Thrust pad VW 510-
- ♦ Thrust pad VW 512-
- ◆ Engine and gearbox support supplement VW 540/1 B-
- ♦ Guide pin 10 15-





- Thrust plate 30 205-
- Mandrel 30 505-
- Thrust pad 3074-
- Assembly tool 3301-
- Shock absorber tool set T10001-
- Punch T10168-

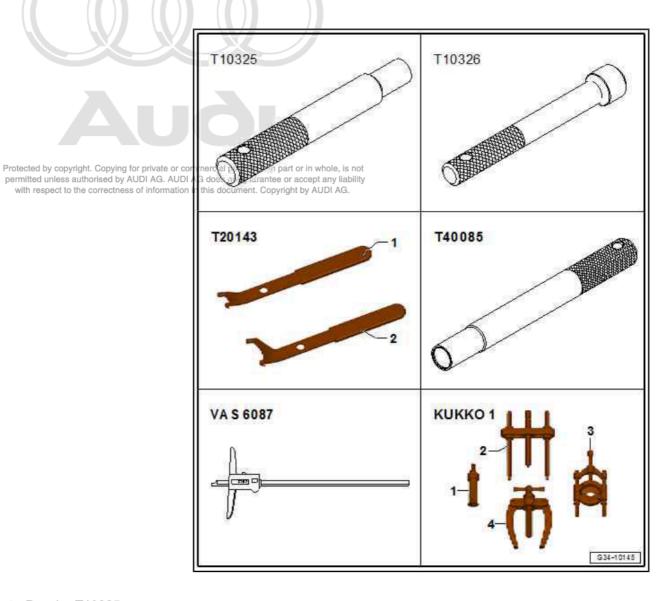


- ♦ Punch T10325-
- ♦ Punch T10326-
- ◆ Extractor tool T20143-
- ♦ Punch T40085-
- ◆ Digital depth gauge VAS 6087-
- ♦ -1- Internal puller VAS 251 605 (Kukko 21-2)-
- ◆ -1- Internal puller VAS 251 613 (Kukko 21-6)-
- ◆ -4- Counter-support VAS 251 623 (Kukko 22-2)-

Press tool - VW 407-






Thrust plate - 3005-



Adapter - T40213/9-




r copyright. Copying for private or commercial purposes, in part or in whole, is not nless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability ect to the correctness of information in this document. Copyright by AUDI AG.

Hot air blower - V.A.G 1416-



◆ Punch - 30-212-



Removing and installing large locking bush -1- for selector shaft

Removing:

- The selector shaft must be removed.
- If the gearbox has not been dismantled, put a cloth in the aperture for the selector shaft to stop the locking bush from dropping into the gearbox.
- Drive out large locking bush inwards (i.e. into gearbox cover) using drift - T40085-.


Installing:

- Drive in locking bush to correct installation depth ⇒ page 10 using drift - T40085- .

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.


Installation depth of large locking bush -1- in gearbox cover

- Apply digital depth gauge VAS 6087- to first shoulder -arrow- of locking bush and check installation depth -a-.
- Installation depth -a- = 6.5 ± 0.2 mm




Removing locking bushes for selector plates/selector forks

- The gearbox cover must be removed.
- Drive out locking bushes for selector plates/selector forks -arrows- with drift - T10325- .



Driving in locking bushes for selector plates/selector forks


Drive in locking bushes for selector plates/selector forks -arrows- with drift - T10326- (press in until drift contacts stop).



Protected by copyright. Copying for private permitted unless authorised by AUDI AG. with respect to the correctness of inform


Exploded view - sealing cap for selector shaft

- Oil seal for selector shaft; removing and installing ⇒ page 110
- Bearing cover 2 -
- Ball sleeve for selector shaft; removing ⇒ page 111 , installing ⇒ page 111




Removing and installing oil seal for selector shaft


Lever out oil seal using extractor tool - T20143/1- .




- Lightly oil outer circumference of oil seal.
- Pack space between sealing lip and dust lip half full with sealing grease for oil seals ⇒ Electronic parts catalogue.



- Drive in oil seal using -T10001/1- or tube VW 423- .
- Installation depth: 2 mm below top edge of sealing cap




Pressing ball sleeve for selector shaft out of sealing cap



Pressing ball sleeve -A- for selector shaft into sealing cap -B-(press in until flush)

Fit ball sleeve so that side with lettering (thicker metal) faces guide pin - 10 - 15- .

Gearbox for front-wheel drive






Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Removing sealing cap for output shaft

Pierce through centre of sealing cap -A- for output shaft and prise out in direction of -arrow-.



Driving in sealing cap for output shaft



Caution

Protected by copyright. Copyi permitted unless authorised b

The sealing cap can only be fitted properly if the outer circum ference has not been lubricated.


- ♦ Do not use additional lubricant on outer circumference of new sealing cap for installation.
- Drive in new sealing cap for output shaft until flush.


Pressing out roller bearing for output shaft - vehicles with frontwheel drive

Before pressing out:

- Remove sealing cap for output shaft ⇒ page 112.
- Remove circlip for roller bearing ⇒ Item 10 (page 95).

Gearbox for four-wheel drive








Pressing out roller bearing for output shaft - vehicles with fourwheel drive

Before pressing out:

- Remove output shaft oil seal ⇒ page 166.
- Remove circlip for roller bearing ⇒ Item 10 (page 95).
- A Press tool VW412-
- B Punch 30-212-
- C Thrust plate VW401-
- D Thrust plate VW402-




Pressing roller bearing for output shaft into gearbox cover (press onto stop)

Install roller bearing so the lettering (side with thicker metal) faces towards the thrust pad - 3074- .

- Vehicles with front-wheel drive: Support gearbox cover with thrust pad - VW 510- directly below bearing mounting.
- After pressing in, fit circlip for roller bearing ⇒ Item 10 (page 95) .
- Install output shaft oil seal ⇒ page 166

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




Removing ball sleeve for 3rd/4th gear selector plate/selector fork from gearbox cover

- Secure internal puller -2- in ball sleeve -1- and pull ball sleeve out of gearbox cover.
- 2 Internal puller VAS 251 605 (Kukko 21-2)-
- 3 M12 nut with washer



Note

The gearbox cover can be secured to the gearbox support - VW 353- for this procedure.




Pressing ball sleeve -1- for 3rd/4th gear selector plate/selector fork into gearbox cover (press in until flush)



Note

The gearbox cover can be secured to the gearbox support - VW 353- for this procedure.




Pulling roller bearing for pinion shaft -1- out of gearbox cover Before pulling out:

- ◆ Remove circlip for roller bearing ⇒ Item 15 (page 95).
- 2 Internal puller VAS 251 613 (Kukko 21-6)-
- 3 Counter-support VAS 251 623 (Kukko 22-2)-



Note

The gearbox cover can be secured to the gearbox support - VW 353- for this procedure.



Driving roller bearing for pinion shaft into gearbox cover

Install roller bearing so the lettering (side with thicker metal) faces towards the thrust pad - 3074- .




Note

Protected by copyright. Copying for private or commercial purposes, in part or in whole

The gearbox cover can be secured to the gearbox support - VW AUDI 353- for this procedure.

Then fit circlip for roller bearing ⇒ Item 15 (page 95).



Removing sleeve for input shaft ball bearing -1-

Heat gearbox cover -2- from outside in area of bearing seat -arrows- using hot air blower - V.A.G 1416- .




Note


Make sure sealing cap -3- is not damaged while you are heating gearbox cover.

- Lightly knock sleeve for ball bearing -1- out of bearing seat.
- Remove oil collector ⇒ Item 12 (page 95).


Pressing in sleeve for input shaft ball bearing







- Gearbox with forced lubrication: Insert oil collector -1- before pressing in.
- Oil collector -1- must make contact with gearbox housing -arrow-.
- Vehicles with front-wheel drive: To ensure that gearbox cover is not damaged in area around oil passage -arrow- when pressing in sleeve, place adapter - T40213/9- underneath bearing mounting for sleeve.
- Insert thrust plate 3005- (with collar facing upwards towards press tool - VW 407-) in new sleeve -1-.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

4 Securing to engine and gearbox support


Special tools and workshop equipment required

◆ Engine and gearbox support - VAS 6095-

Protected by copyright. Copying for private or commercial purpose permitted unless authorised by AUDI AG. AUDI AG does not g with respect to the correctness of information in this docume



Gearbox support - T40206- with -T40206/1- or -T40206/1A-



Procedure




Caution

Risk of breaking gearbox housing


- The gearbox must be secured to the gearbox support with four bolts -arrows- as the gearbox housing could break when pressing out the gear cluster.
- Secure gearbox support T40206- to gearbox -arrows- with T40206/1- or -T40206/1A- .

To do so, fit securing bolts into holes marked "3", "6", "8" and "11".





- Lift gearbox with workshop hoist VAS 6100- ⇒ page 50.
- Attach gearbox with gearbox support T40206- to engine and gearbox support VAS 6095- .

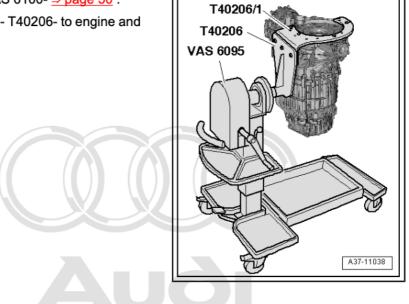


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

5 Gear oil circuit

- ⇒ "5.1 Overview gear oil circuit", page 118
- ⇒ "5.2 Exploded view gear oil pump", page 119
- ⇒ "5.3 Removing and installing gear oil pump", page 120

5.1 Overview - gear oil circuit


- 1 Gear oil pump
 - Driven via output shaft
 - Removing and installing ⇒ page 120
- 2 Gear oil filter
 - With magnet
 - Renew when servicing gearbox
- 3 Injection tube for gear clus-
 - ☐ For oil supply to input and output shaft
- 4 Oil collector
 - □ Remove together with sleeve for input shaft ball bearing ⇒ page 114
 - ☐ Installing ⇒ page 115
- 5 Injection tube for final drive gear set
 - ☐ For oil supply to differential
 - Removing and installing ⇒ page 100

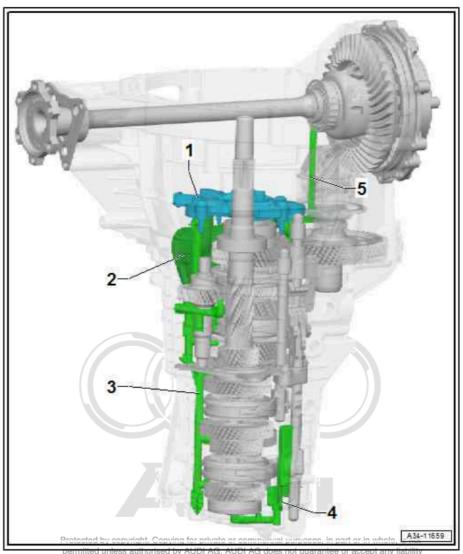

with respect to the correctness of information in this document. Copyright by AUDI AG.


5.2 Exploded view - gear oil pump

- 1 Gear oil pump
 - □ Driven via output shaft
 - □ Removing and installing ⇒ page 120
- 2 Seal for injection tube
 - □ 31.5 x 2.6
 - Renew after removing
- 3 Output shaft oil seal
 - □ 54 x 4.05
 - Renew after removing
- 4 Seal for suction line
 - □ 24 x 2.85
 - Renew after removing
- 5 Bolt
 - ☐ For pressure test connection for checking operation at manufacturer
 - Gear oil runs into clutch housing when bolt is unscrewed
 - Renew after removing
 - ☐ 10 Nm +30°
- 6 Bolts
 - Aluminium bolts (M8x40)
 - Renew after removing
 - ☐ Tightening torque and sequence ⇒ page 119

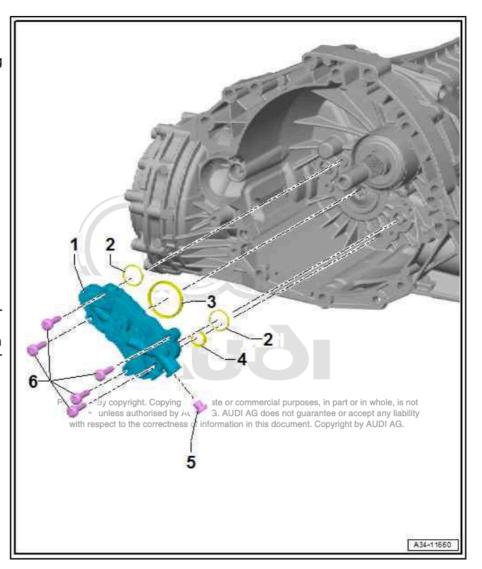

Tightening torque and sequence for gear oil pump -A-

- Tighten new bolts in stages in sequence shown (-1- to -5-).



Stage	Bolts	Tightening torque
1	-1- to -5-	Tighten hand-tight
2	-1- to -5-	8 Nm +120°


5.3 Removing and installing gear oil pump

Special tools and workshop equipment required

♦ Torque wrench - V.A.G 1410-




Gearbox support - T40173-



Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-.
- Tilt gearbox to rear with gearbox support T40173- to prevent gear oil from escaping.
- Remove clutch module ⇒ page 30.



Protected by copyrig permitted unless auti with respect to the

- Unscrew bolts -1- for gear oil pump.
- Detach gear oil pump -2-.


Installing

Installation is carried out in reverse order; note the following:



Note

The seals for the gear oil pump have to be renewed after removal.




any liability

DÍ AG.



- Insert new seals for gear oil pump -1-.

Allocation of seals for gear oil pump ⇒ page 119




Fit gear oil pump -2- onto gearbox and tighten new bolts -1- in specified sequence ⇒ page 119.

Tightening torques

♦ ⇒ "5.2 Exploded view - gear oil pump", page 119



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



35 – Gears, shafts

1 Dismantling and assembling gears and shafts

- ⇒ "1.1 Exploded view gear cluster", page 122
- ⇒ "1.2 Dismantling and assembling gear cluster", page 124
- 1.1 Exploded view - gear cluster



- Secures selector fork cluster ⇒ Item 2 (page 122) to bearing mounting ⇒ Item 4 (page 122)
- □ 2x
- ☐ 20 Nm +45°
- 2 Selector fork cluster
 - Dismantling and assembling ⇒ page 60
- 3 Input shaft
 - Dismantling and assembling ⇒ page 133
- 4 Bearing mounting
 - Carries bearings for input shaft and output shaft in gearbox cover
 - Clean locking fluid out of threaded holes (using thread tap or similar)




Note

The roller bearing outer races the input shaft and output si cannot be renewed separate

The roller bearing outer race must not have any radial clea:ance in the bearing mounti25

The bearing mounting does not have to be renewed when the roller bearings on the input shaft or output shaft are renewed, e.g.

when installing a new input shaft.

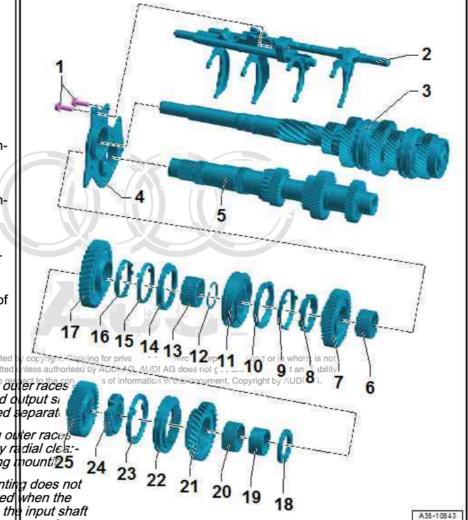

5 - Output shaft

- With 3rd and 4th gear wheels
- □ Removing and installing 1st, 2nd and reverse gear ⇒ page 124
- □ Dismantling and assembling ⇒ page 151
- 6 Needle bearing
 - □ For 2nd gear




7 - 2	nd speed selector gear
8 - Ir _ _ _	Installation position ⇒ page 129
9 - Ir _ _	
10 - _ _ _	Installation position ⇒ page 129
	Installation position of locking collar: outer chamfer faces 2nd speed selector gear <u>⇒ page 130</u>
	Circlip Determining thickness ⇒ page 130
ם - 13 -	Needle bearing
	Synchro-ring for 1st gear Do not interchange with synchro-ring for 2nd gear Installation position ⇒ page 129
15 - _ _	
16 - _ _ _	Installation position ⇒ page 129
17 -	1st speed selector gear
18 - □	Thrust washer For 1st speed and reverse selector gears
19 - _ _ _	Pulling off ⇒ page 127
20 - _	Needle bearing For reverse gear
	Reverse selector gear
	Reverse gear locking collar
	Synchro-ring for reverse gear Checking for wear ⇒ page 149

- 24 Reverse gear synchro-hub
 - □ With synchro-spring
 - □ Pulling off ⇒ page 127
 - □ Pressing on ⇒ page 131
- 25 Spur gear drive input gear
 - □ Pulling off ⇒ page 127
 - □ Pressing on ⇒ page 131

1.2 Dismantling and assembling gear cluster


Special tools and workshop equipment required

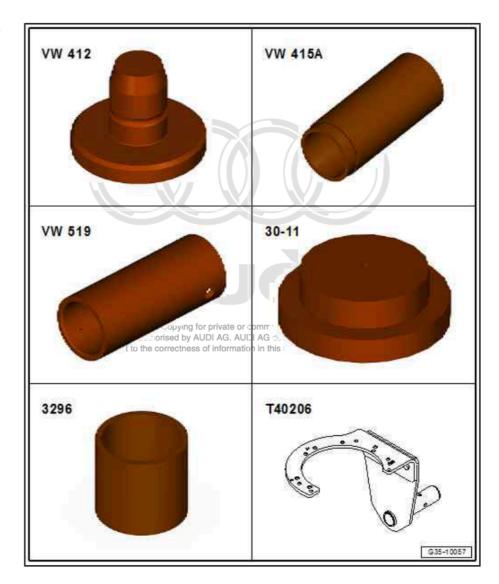


- Press tool VW 412-
- Tube VW 415 A-
- Tube VW 519-
- Thrust plate 30 11-
- Tube 3296-
- Gearbox support T40206-




Separating tool - T40213-



♦ Hot air blower - V.A.G 1416-

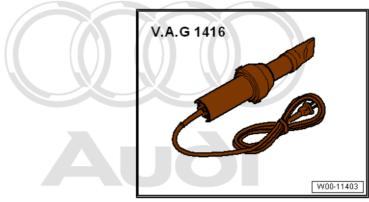


♦ Circlip pliers - VAS 5503A-

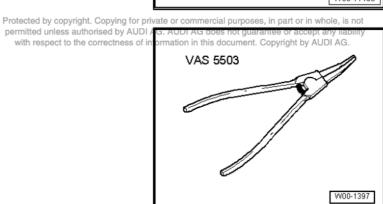

♦ Inductive heater - VAS 6414-



-1- Two-arm puller - VAS 251 005 (Kukko 20-20)-




◆ -2- Puller hooks 300 mm


Dismantling gear cluster

- Attach plate T40213/1- to gearbox support T40206- with bolts -arrows-.
- Fit adapters T40213/10- and -T40213/11- in plate -T40213/1- and secure with knurled nuts - T40213/3-.


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is no permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liab with respect to the correctness of information in this document. Copyright by AUDI AG.



Insert input shaft -1- together with output shaft -2- and selector fork cluster -3- in adapters - T40213/10- and -T40213/11- .



Remove bolts -arrows- and detach selector fork cluster -2from bearing mounting -1-.





- Heat spur gear drive input gear -1- to approx. 100 °C using hot air blower - V.A.G 1416- and detach it from output shaft. When doing this, counterhold at hexagon flats -arrow- of two-arm puller.
- 2 Two-arm puller VAS 251 005 (Kukko 20-20)-
- 3 Hook, 150 mm



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability

- Pull off 1st speed selector gear -1- together with reverse gear synchro-hub and inner race for reverse selector gear.
- To do so, heat reverse gear synchro-hub to approx. 80 °C using hot air blower - V.A.G 1416- (or similar) and counterhold at hexagon flats -arrow- of two-arm puller .
- 2 Two-arm puller VAS 251 005 (Kukko 20-20)-
- 3 Hook, 150 mm



Caution

Risk of damage to dog teeth on 1st speed selector gear.


- Hooks of two-arm puller must not come into contact with dog teeth of 1st speed selector gear during removal.
- Remove needle bearing and synchro-rings for 1st speed selector gear.




Caution


The synchro-rings for 1st and 2nd gear must not be interchanged.

If synchro-rings are interchanged, the synchromesh will jam or malfunction prematurely.





- Detach circlip for 1st/2nd gear synchro-hub.
- Pull off 2nd speed selector gear -1- together with synchro-hub and locking collar for 1st/2nd gear.
- 2 Two-arm puller VAS 251 005 (Kukko 20-20)-
- 3 Hook, 300 mm
- Remove needle bearing for 2nd speed selector gear.




Detach bearing mounting -1- from input shaft -2- and output shaft -3-.




Note

- Dismantling and assembling input shaft -2- ⇒ page 137
- Dismantling and assembling output shaft -3- ⇒ page 151
- Installation position of bearing mounting raised portion opying for private -arrow- points upwards towards splines on input shaft rised by AUDI AG




Assembling gear cluster

- Place plate T40213/1- with adapters T40213/10- and -T40213/11- on work table of workshop press . Secure adapters with knurled nuts - T40213/3-.
- Insert output shaft -1- into adapter T40213/11- and input shaft -2- into adapter - T40213/10- .



Fit bearing mounting -1- in correct position over the two shafts -2, 3-, with projection -arrow- facing upwards.



Distinguishing synchro-rings and inner rings for 1st and 2nd gear



Caution

The synchro-rings for 1st and 2nd gear must not be interchanged.

- If synchro-rings are interchanged, the synchromesh will jam or malfunction prematurely.
- The locking collar must be installed in the correct direction *⇒ page 130* .

permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept

A - The inner ring for 1st gear has a coated friction surface on the by AU inside -arrow 1- and is conical.

B - The inner ring for 2nd gear has no friction surface on the inside -arrow 2- and is cylindrical.

Distinguishing features:


- Additional lug -arrow 3- on inner ring
- ◆ Additional notch on synchro-ring -arrow 4-


Installation position of synchro-rings for 1st and 2nd gear



Note


- Mixing up the inner ring -2- or synchro-ring -4- for 1st gear with the ones for 2nd gear will cause them to be damaged irreparably.
- If components are not being renewed, make sure that synchrorings are re-installed on the same gear.
- Fit inner ring -2- onto selector gear -1-.
- Fit intermediate ring -3-. Lug -B- must be inserted into recess
- Fit synchro-ring -4-. Guide lugs -C- through recess -arrow-.





Assembly and installation position of 1st and 2nd gear locking collar and synchro-hub

- Fit locking collar -1- onto synchro-hub -2- as follows:
- The chamfer on the locking collar -arrow E- and the lower collar on the synchro-hub -arrow C- must face the 1st speed selector gear.
- The wide teeth of the locking collar -arrow A- and the synchrohub -arrow B- must align.
- Then fit thrust blocks -3- in synchro-hub and press them into recesses -arrow D- in locking collar.




Pressing on 1st/2nd gear synchro-hub

- Heat synchro-hub to approx. 100 °C.
- Installation position of synchro-hub: lower inside collar faces 1st speed selector gear. permitted unless authorised by AUD
- Installation position of locking collar: outer chamfer -arrowfaces 2nd speed selector gear.



Note

When pressing on the synchro-hub, lift the 2nd speed selector gear slightly so that the stop lugs on the synchro-ring engage in the slots in the hub.



When renewing synchro-hub or output shaft:


Determine thickness of new circlip -1- for 1st/2nd gear synchrohub.

Determine the thickest circlip that will just fit and install it. For part number refer to ⇒ Electronic parts catalogue.

The following circlips are available:

Circlip thickness (mm)					
2.44	2.47	2.50			

Install circlip for 1st/2nd gear synchro-hub -1-.



- Install 1st speed selector gear with synchro-rings and needle bearing on output shaft.
- Fit thrust washer -1- and pre-heated inner race -2- for reverse gear needle bearing.
- Fit reverse gear needle bearing together with selector gear and locking collar for reverse gear; note correct position ⇒ page 149
- Fit synchro-ring for reverse gear in locking collar.
- Heat synchro-hub for reverse gear to approx. 100 °C.




Protected by copyright. Copying for private or commercial purposes, in part or in permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept with respect to the correctness of information in this document. Copyright by A


Press on synchro-hub for reverse gear -1- with installed synchro-spring ⇒ Item 4 (page 147)





Note

When the synchro-hub for reverse gear is pressed on, the lugs -2- on the synchro-ring must engage in the slots in the hub -arrows-.










- To attach selector fork cluster -2- to gear cluster, secure plate - T40213/1- to gearbox support - T40206- ⇒ page 126.
- Secure selector fork cluster -2- to bearing mounting -1- with bolts -arrows-.
- Remove input shaft together with output shaft and selector fork cluster from plate - T40213/1- .

Tightening torques

⇒ "1.1 Exploded view - gear cluster", page 122





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

2 Input shaft

- ⇒ "2.1 Exploded view input shaft", page 133
- ⇒ "2.2 Dismantling and assembling input shaft", page 137
- ⇒ "2.3 Allocation of 3rd 6th gear synchro-rings to locking collars", page 144
- ⇒ "2.4 Checking 3rd 6th gear synchro-rings for wear", page 145

2.1 Exploded view - input shaft


Detaching input shaft from output shaft and bearing mounting



Note

- Lubricate all bearings and synchro-rings on input shaft with gear oil before installing.
- The circlip \Rightarrow Item 8 (page 135) should only be detached when renewing the roller bearing \Rightarrow Item 3 (page 134).
- 3rd to 6th speed selector gears should have an axial play of 0.15 ... 0.50 mm after installing.
- ♦ Note correct assignment of synchro-rings page 144 rt or in whole, is not
- When fitting new gear wheels or input shaft refer to technical data ⇒ 6-speed manual gearbox OCS, ODJ, 0CX; Rep. gr. 00; Technical data and ⇒ Electronic parts catalogue.

- 1 Sealing plug
 - For input shaft
 - □ Installing ⇒ page 136
- 2 Input shaft
 - ☐ With splines for 1st, 2nd and reverse gear
 - Sealing plug
 ⇒ Item 1 (page 134) is
 fitted in bore in vicinity of
 splines for clutch plate
 - Fit sealing plug when renewing input shaft
 ⇒ page 136
 - Checking input shaft for wear ⇒ page 136
- 3 Roller bearing
 - □ For input shaft
 - □ Renew after removing
 - □ Pressing off⇒ page 140
 - □ Pressing on ⇒ page 141
- 4 Bearing mounting
 - Carries bearings for input shaft and output shaft in gearbox cover
 - Clean locking fluid out of threaded holes (using thread tap or similar)
 - Different versions
 - ☐ For correct version, refer to ⇒ Electronic parts catalogue

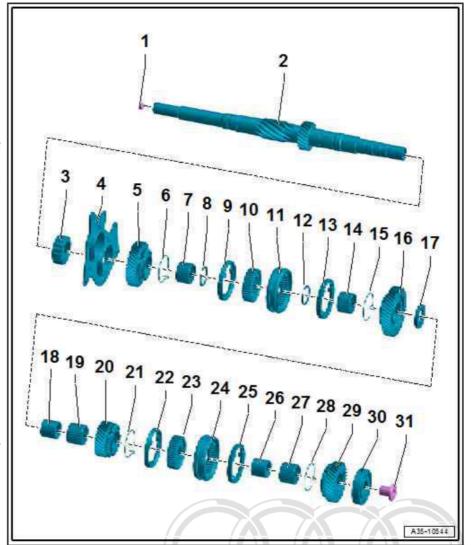



Note

- The roller bearing outer races on the input shaft and output shaft cannot be renewed separately.
- The roller bearing outer races must not have any radial clearance in the bearing mounting.
- The bearing mounting does not have to be renewed when the roller bearings on the input shaft or output shaft are renewed, e.g. when installing a new input shaft.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

- 5 5th speed selector gear
- When rotated, gear must not come into contact with circlip ⇒ Item 8 (page 135) ⇒ page 141
- 6 Synchro-spring
 - ☐ Fit in 5th speed selector gear ⇒ page 140
- 7 Needle bearing
 - ☐ For 5th gear
 - ☐ Installation position ⇒ page 141


8 -	Circlip
	☐ Mark
	☐ Renew after removing
	☐ Do not interchange with other circlip <u>⇒ Item 12 (page 135)</u>
	☐ Installation position ⇒ page 141
•	It should not be possible to turn circlip in annular groove on input shaft by hand
	In installation position, circlip must not come into contact with 5th speed selector gear when gear is rotated ⇒ page 141
	5th gear synchro-ring ☐ Checking for wear <u>⇒ page 145</u> ☐ Allocation <u>⇒ page 144</u>
	- Synchro-hub for 5th and 6th gear ☐ No specified installation position
	Locking collar for 5th and 6th geartected by copyright. Copying for private or commercial purposes, in part or in whole, is not No specified installation position with respect to the correctness of information in this document. Copyright by AUDI AG. Do not interchange with locking collar for 3rd/4th gear; mark locking collars ⇒ page 144
	- Circlip Mark Do not interchange with other circlip ⇒ Item 8 (page 135) Determining thickness ⇒ page 142
	- 6th gear synchro-ring ☐ Checking for wear ⇒ page 145 ☐ Allocation ⇒ page 144
	- Needle bearing ☑ For 6th gear
	- Synchro-spring ☑ Fit in 6th speed selector gear ⇒ page 140
16 -	- 6th speed selector gear
	- Thrust washer ☑ For 3rd speed and 6th speed selector gears
18 -	Needle bearing inner race For 3rd gear
	- Needle bearing ☑ For 3rd gear
	- 3rd speed selector gear
21 -	- Synchro-spring ☐ Fit in 3rd speed selector gear <u>⇒ page 140</u>
	- 3rd gear synchro-ring
	☐ Checking for wear <u>⇒ page 145</u> ☐ Allocation <u>⇒ page 144</u>
_	- Synchro-hub for 3rd and 4th gear ☐ Installation position: lower inside collar faces 4th gear ⇒ page 143
	- Locking collar for 3rd and 4th gear ☐ Do not interchange with locking collar for 5th/6th gear; mark locking collars ☐ Installation position ⇒ page 143

□ ⇒	page	144
-----	------	-----


- 25 4th gear synchro-ring
 - ☐ Checking for wear ⇒ page 145
 - ⇒ page 144
- 26 Needle bearing inner race
 - □ For 4th gear
- 27 Needle bearing
 - ☐ For 4th gear
- 28 Synchro-spring
 - ☐ Fit in 4th speed selector gear ⇒ page 140
- 29 4th speed selector gear
- 30 Ball bearing
 - □ Pressing off ⇒ page 139
 - Note installation position ⇒ page 144
 - □ Pressing on ⇒ page 144
- 31 Multi-point socket head bolt
 - ☐ Coat with locking fluid; for locking fluid refer to ⇒ Electronic parts catalogue
 - □ 250 Nm

Installing sealing plug -1- in input shaft

- Drive sealing plug -1- into input shaft -2- to dimension -a-.
- Dimension -a- = 14.5 mm
- Open end of sealing plug -arrow- faces towards assembly mandrel - 10-508- .




Checking input shaft for wear

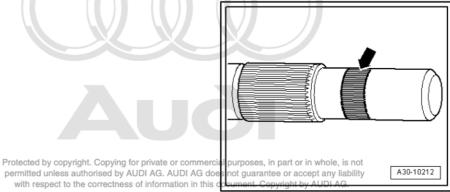




- If damage can be felt on the surface of the input shaft in the vicinity of the needle bearing for the dual-mass flywheel -arrow-, both the input shaft and the needle bearing in the dualmass flywheel must be renewed ⇒ page 46.
- Check input shaft for scoring around bearing in drive plate -arrow-. Renew needle bearing in drive plate if necessary ⇒ Engine, mechanics; Rep. gr. 13; Cylinder block (gearbox end); Renewing needle bearing in drive plate.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is n permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liab with respect to the correctness of information in this document. Copyright by AUDI AG.


2.2 Dismantling and assembling input shaft

Special tools and workshop equipment required

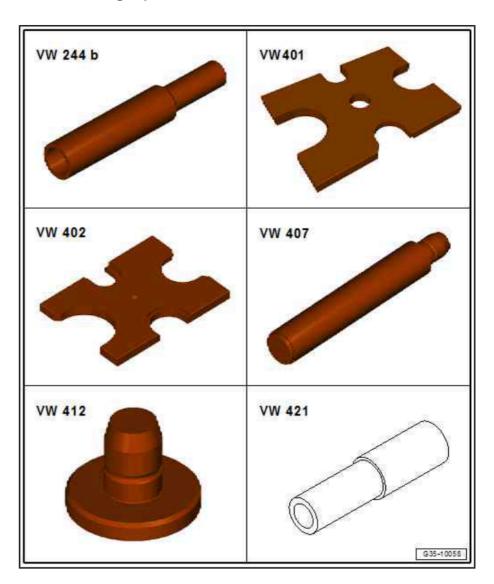

- Drift sleeve VW 244 B-
- Thrust plate VW 401-
- Thrust plate VW 402-
- Press tool VW 407-
- Press tool VW 412-

Tube - VW 421-

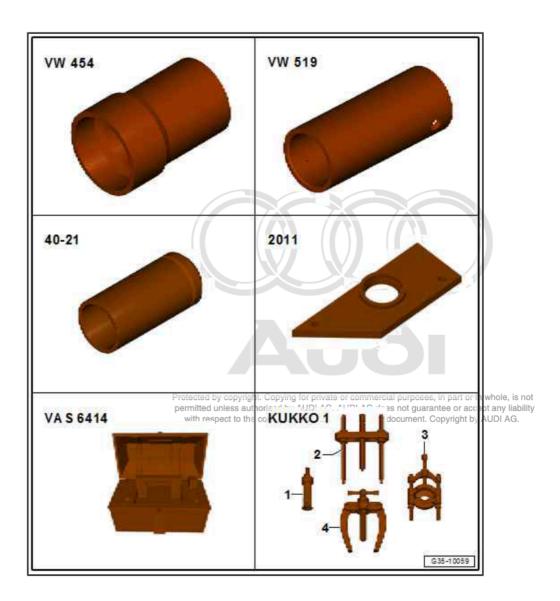


- Thrust piece VW 454-
- Tube VW 519-
- Drift sleeve 40 21-
- Support bridge 2011-
- Inductive heater VAS 6414-
- -3- Splitter VAS 251 411 (Kukko 17-2)-

Dismantling input shaft

- Input shaft has been detached from output shaft and bearing mounting ⇒ page 122.
- Multi-point socket head bolt in input shaft has been loosened ⇒ page 69 .
- If synchro-rings are not being renewed, make sure that they are re-installed on the same gear.
- Do not confuse locking collar for 3rd/4th gear with locking collar for 5th/6th gear. Mark locking collars accordingly.
- First remove multi-point socket head bolt for input shaft.

- Clamp splitter -1- underneath driving teeth on 4th speed selector gear -3- and press off ball bearing -2-.
- 1 Splitter VAS 251 411 (Kukko 17-2)-
- Remove synchro-ring and needle bearing for 4th speed selector gear.




- Press off 3rd speed and 6th speed selector gears (items -4, 5-) together with synchro-hub for 3rd/4th gear -3- and needle bearing inner races -2-.
- 1 Splitter VAS 251 411 (Kukko 17-2)-
- Detach circlip for 5th /6th gear synchro-hub from input shaft.




Note

Mark this circlip so that it is not interchanged with the circlip below the 5th /6th gear synchro-hub.

- Press off locking collar with 5th/6th gear synchro-hub -2- and 5th speed selector gear -3-.
- 1 Splitter VAS 251 411 (Kukko 17-2)-






Open out needle bearing -2- for 5th gear and guide it carefully over circlip -1- and teeth -3- for 5th/6th gear synchro-hub.



Note

- The circlip -1- below teeth -3- for the 5th/6th gear synchro-hub should only be removed from the input shaft if the roller bearing is being renewed (next step).
- Always renew the circlip if it has been removed.
- Remove circlip -1-.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

- Press roller bearing off input shaft.
- A Splitter VAS 251 411 (Kukko 17-2)-



Note

- The roller bearing will be damaged when it is pressed off and must therefore always be renewed.
- If the input shaft is being renewed, the roller bearing does not have to be pressed off the shaft.
- To press off the roller bearing, you can also break open the cage of the bearing using a screwdriver or similar and then apply the splitter -A- to the inner race.
- Clean thread for multi-point socket head bolt in input shaft to remove any remaining locking fluid.

Assembling input shaft




Note


- Lubricate all needle bearings and synchro-rings with gear oil before fitting.
- Checking synchro-rings for wear ⇒ page 145.
- Note correct assignment of synchro-rings ⇒ page 144.
- Using inductive heater VAS 6414- or similar, heat needle bearing inner races to 130 °C (max.) before pressing on (wear protective gloves).
- Using inductive heater VAS 6414- or similar, heat synchrohub to 100 °C (max.) before pressing on (wear protective gloves).
- Always press on roller bearing, needle bearing inner races and synchro-hubs as far as stop to make sure the axial clearance of the selector gears meets the specification.

Inserting synchro-spring in selector gear


The bent end of the synchro-spring -arrow- must be hooked into the hole in the selector gear.

> Protected by copyright. Copying for private or commercial purposes, in part or permitted unless authorised by AUDI AG. AUDI AG does not guarantee or a with respect to the correctness of information in this document. Copyright I





Press roller bearing onto input shaft as far as stop.



Open out needle bearing -2- for 5th speed selector gear and guide it carefully over teeth for 5th/6th gear synchro-hub -3-. The needle bearing must be positioned against shoulder -arrow- on input shaft.




Note

If the circlip -1- has not been removed the needle bearing 2 to or common the circlip -1- has not been removed the needle bearing 12 to or common the circlip -1- has not been removed the needle bearing 12 to or common the circlip -1- has not been removed the needle bearing 12 to or common the circlip -1- has not been removed to be a circlip -1- has not been remov must also be guided carefully over this teirclips authorised by AUDI AG. AUDI AG. ct to the correctness of information in th



- It should not be possible to turn the circlip in the annular groove on the input shaft by hand
- Install 5th speed selector gear -B-.
- When rotated, selector gear -B- must not come into contact with circlip -A-.
- There must be a uniform clearance -x- between selector gear and circlip all round.



A35-10116


al purposes

s not guarant

Press on synchro-hub for 5th and 6th gear as follows:

Note the following when performing the steps below:

- Fit input shaft in drilling of support bridge 2011-.
- Position drift sleeves on centre of heated components (synchro-hub and needle bearing inner races).
- First press on components just briefly, then stop exerting pressure and check whether drift sleeves are still positioned properly and press on as far as stop.
- Fit 5th gear synchro-ring.
- Press on pre-heated synchro-hub as far as stop.
- Slide locking collar over synchro-hub.




Determining thickness of circlip for synchro-hub for 5th and 6th gear

- Synchro-hub is pressed on as far as stop.
- Determine the thickest circlip that will just fit and install it. For part number refer to > Electronic parts catalogue .

The following circlips are available:

Circlip thickness (mm)		
2.41	2.44	2.47
2.50	2.55	

- Install 6th speed selector gear with needle bearing and synwhole, is n chro-ringmitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any lial with respect to the correctness of information in this document. Copyright by AUDI AG.
- Fit thrust washer -A-.
- Press on pre-heated needle bearing inner race -B- for 3rd speed selector gear.
- Install 3rd speed selector gear with needle bearing and synchro-ring.



V35-1347




Installation position of 3rd/4th gear synchro-hub and locking collar

The lower inside collar -arrow A- of the synchro-hub -1- faces 4th gear.




Note

- Depending on version, locking collars -2- with or without groove -arrow B- may be fitted.
- ♦ If there is a groove -arrow B- on the locking collar -2-, this may face towards 3rd or 4th gear.



Pressing on pre-heated 3rd/4th gear synchro-hub

Fit locking collar for 3rd/4th gear on synchro-hub.




Pressing on pre-heated needle bearing inner race -A- for 4th speed selector gear

Install 4th speed selector gear together with needle bearing and synchro-ring.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is no permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liabi with respect to the correctness of information in this document. Copyright by AUDI AG.



- Installation position of ball bearing on input shaft High shoulder -arrow- faces 4th speed selector gear.




- Press ball bearing -1- onto input shaft.
- Then check all selector gears for freedom of movement and axial play.
- The axial play of the selector gears must be at least 0.15 mm.



Note

For remaining assembly of gear cluster, tighten bolt for input shaft hand-tight.



2.3 Allocation of 3rd - 6th gear synchro-rings to locking collars




Note

Protected by copyright. Copying for private or commercial purposes, in

- The synchro-rings for 3rd/4th gear always have a carbon coat-
- The synchro-rings for 5th/6th gear always have a molybdenum coating.
- Please note correct allocation of synchro-rings to locking collars.

Different types of synchro-rings

- I Molybdenum-coated synchro-ring ⇒ page 145
- Distinguishing features: synchro-ring has oil recesses -arrows-, and friction surface -A- is graphite-grey with a slightly porous appearance.
- Fitted on 5th and 6th gears
- II Carbon-coated synchro-ring ⇒ page 145
- Distinguishing features: friction surface -B- is black with a porous appearance; upper part is not coated.
- Fitted on 3rd and 4th gears




Locking collars for molybdenum-coated synchro-rings


- I Locking collar with one groove -arrow 1- and no chamfers
- Locking collar -I- old version, no longer installed
- Fitted on 5th and 6th gears
- II Locking collar with chamfers -arrows 2- on both sides of selector fork slot
- Locking collar -II- new version, currently installed
- Fitted on 5th and 6th gears

Locking collar for carbon-coated synchro-rings Locking collar with chamfers on outer sides -arrows-

· Fitted on 3rd and 4th gears

Protected by copyright. Copying for private or commercial purposes, in pa permitted unless authorised by AUDI AG. AUDI AG does not guarantee of with respect to the correctness of information in this document. Copyr





2.4 Checking 3rd - 6th gear synchro-rings for wear


Special tools and workshop equipment required

Depth gauge



Note

- If the synchromesh of one of the gears makes a grinding noise when engaging the gear, check the synchro-ring, the dog teeth of the locking collar/synchro-ring and the selector gear page 11 and the synchro-spring -arrow- in the selector gear for damage. Renew damaged parts.
- The clutch and clutch actuator mechanism must be OK and the selector mechanism must be correctly adjusted.




Checking synchro-ring for wear

- Press synchro-ring -E- into locking collar and measure gap -a- at positions -A-, -B- and -C- using depth gauge -D-.
- Add the measured values and divide by 3.

The determined value should not exceed 0.45 mm.




Protected by copyright. Copying for private or commercial purposes, in part or in permitted unless authorised by AUDI AG. AUDI AG does not guarantee or acc with respect to the correctness of information in this document. Copyright by



Checking synchro-rings with molybdenum coating and carbon coating

Clean synchro-ring; the friction surface must be free of oil.

- I Molybdenum-coated synchro-ring
- The friction surface of an intact molybdenum coated synchroring has a graphite-grey, slightly porous appearance.
- The synchro-ring must be renewed if very shiny areas -A- have formed on the friction surface or if the brass-coloured metal underneath is already visible.
- II Carbon-coated synchro-ring
- Check the friction surfaces -B- of carbon-coated synchro-rings for damage (flattened sections or particles of carbon coating broken away). Renew if necessary.



3 Output shaft

- ⇒ "3.1 Exploded view output shaft", page 147
- ⇒ "3.2 Dismantling and assembling output shaft", page 151


3.1 Exploded view - output shaft

Detaching output shaft from input shaft and bearing mounting ⇒ page 122



Note

- Lubricate all needle bearings and synchro-rings with gear oil before installing.
- When renewing synchro-rings, renew inner ring, intermediate ring and synchro-ring for the corresponding gear together.
- If synchro-rings are not being renewed, make sure that they are re-installed on the same gear.
- When fitting new gear wheels or output shaft refer to technical data ⇒ 6-speed manual gearbox 0CS, 0DJ, OCX; Rep. gr. 00; Technical data and ⇒ Electronic parts catalogue.
- 1 Bolt
 - Install with locking fluid; for locking fluid refer to ⇒ Electronic parts catalogue
 - □ 350 Nm
- 2 Spur gear drive input gear
 - Removing and installing ⇒ page 124
- 3 Reverse gear synchro-hub
 - Removing and installing ⇒ page 124
- 4 Synchro-spring
 - Insert in drilling in reverse gear synchro-hub ⇒ page 140
- 5 Synchro-ring for reverse
 - Checking for wear ⇒ page 149
- 6 Reverse gear locking collar
 - Installation position ⇒ page 149 Protected by copy
- 7 Reverse selector gearspect to
 - Installation position ⇒ page 149
- 8 Needle bearing
 - For reverse gear
- 9 Needle bearing inner race
 - □ For reverse gear
 - Removing and installing ⇒ page 124

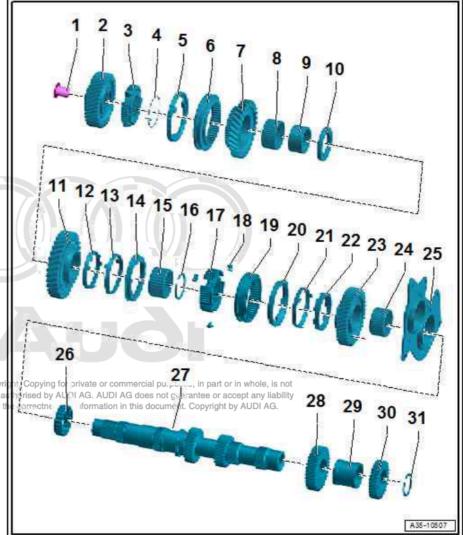


40 7	The most market and
10 - I	hrust washer For 1st speed and reverse selector gears
_	
	st speed selector gear
12 - II	nner ring for 1st gear Renew if scored or if there are visible traces of wear
	Installation position ⇒ page 129
_	Checking for wear ⇒ page 150
	Distinguishing inner rings and synchro-rings for 1st and 2nd gear ⇒ page 150
_	ntermediate ring for 1st gear
 	Installation position ⇒ page 129
ū	Checking for wear ⇒ page 150
14 - 9	Synchro-ring for 1st gear
	Renew if scored or if there are visible traces of wear
	Installation position ⇒ page 129
	Distinguishing inner rings and synchro-rings for 1st and 2nd gear ⇒ page 150
15 - N	leedle bearing
	Frotected by copyright. Copying for private or commercial purposes, in part or in whole, is not From 1st gear authorised by AUDI AG. AUDI AG does not guarantee or accept any liability
16 - C	with respect to the correctness of information in this document. Copyright by AUDI AG. Circlip
	Determining thickness <u>⇒ page 130</u>
17 - S	Synchro-hub for 1st and 2nd gear
	·
18 - T	hrust piece
	3x
	Installing <u>⇒ page 151</u>
19 - L	ocking collar for 1st and 2nd gear
	Installation position ⇒ page 151
20 - S	Synchro-ring for 2nd gear
	Renew if scored or if there are visible traces of wear
	Installation position ⇒ page 129
	Checking for wear <u>⇒ page 150</u>
	Distinguishing inner rings and synchro-rings for 1st and 2nd gear <u>⇒ page 150</u>
21 - lı	ntermediate ring for 2nd gear
	Installation position ⇒ page 129
	Checking for wear <u>⇒ page 150</u>
	nner ring for 2nd gear
	Renew if scored or if there are visible traces of wear
_	Installation position ⇒ page 129
	Distinguishing inner rings and synchro-rings for 1st and 2nd gear <u>⇒ page 150</u>
23 - 2	nd speed selector gear
24 - N	leedle bearing
	For 2nd gear
25 - E	Bearing mounting
	Carries bearings for input shaft and output shaft in gearbox cover
26 - F	Roller bearing
	For output shaft

- □ Removing and installing ⇒ page 152
- 27 Output shaft
 - With splines for 5th and 6th gear
- 28 3rd gear wheel
 - ☐ Installation position: high inside collar faces 4th gear
 - □ Pressing off ⇒ page 152
 - □ Pressing on ⇒ page 153
- 29 Spacer sleeve
- 30 4th gear wheel
 - □ Pressing off ⇒ page 152
 - □ Installation position: high inside collar faces circlip ⇒ Item 31 (page 149)
 - □ Pressing on ⇒ page 153
- 31 Circlip
 - ☐ Fit in annular groove on output shaft
 - □ Determining thickness ⇒ page 153

Installation position of locking collar -2- and selector gear -1- for reverse gear

The pointed teeth -arrow A- of the locking collar -2- point away from the driving teeth -arrow B- of the reverse selector gear




Checking synchro-ring for wear

- Press synchro-ring -E- into locking collar and measure gap -a- at positions -A-, -B- and -C- using depth gauge -D-.
- Add the measured values and divide by 3.

The determined value should not exceed 1.7 mm.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Distinguishing synchro-rings and inner rings for 1st and 2nd gear



Caution

The synchro-rings for 1st and 2nd gear must not be inter-

- If synchro-rings are interchanged, the synchromesh will jam or malfunction prematurely.
- The locking collar must be installed in the correct direction *⇒ page 151* .
- A The inner ring for 1st gear has a coated friction surface on the inside -arrow 1- and is conical.
- B The inner ring for 2nd gear has no friction surface on the inside -arrow 2- and is cylindrical.

Distinguishing features:

- Additional lug -arrow 3- on inner ring
- Additional notch on synchro-ring -arrow 4-

Checking 1st gear inner ring for wear

- Check outer friction surface -arrow- for scoring or visible traces of wear and renew if necessary. copyright. Copying for private permitted unless authorised by AUDI AG.
- Press inner ring onto chamfer on selector gear and measure of inform gap -a- using a feeler gauge .

Gap -a-	Wear limit
Inner ring for 1st gear	0.6 mm

Checking 1st and 2nd gear intermediate ring for wear

- Check inner friction surface of synchro-ring for grooves or scoring and renew if necessary.
- Fit inner ring, intermediate ring and synchro-ring on selector gear and rotate rings until they are »seated«.



Note

To achieve proper seating, rotate synchro-rings approx. one turn while pressing down rings simultaneously.


Then measure gap -a- using a feeler gauge .


Gap -a-	Wear limit
1st and 2nd gear	0.7 mm




Note

Renew inner ring, intermediate ring and synchro-ring for the corresponding gear together.











Assembly and installation position of 1st and 2nd gear locking collar and synchro-hub

- Fit locking collar -1- onto synchro-hub -2- as follows:
- The chamfer on the locking collar -arrow E- and the lower collar on the synchro-hub -arrow C- must face the 1st speed selector gear.
- The wide teeth of the locking collar -arrow A- and the synchrohub -arrow B- must align.
- Then fit thrust blocks -3- in synchro-hub and press them into recesses -arrow D- in locking collar.




3.2 Dismantling and assembling output shaft

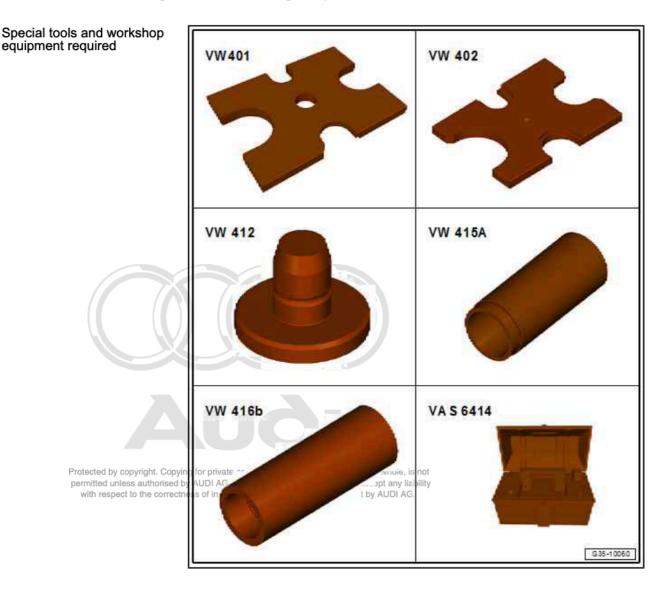

♦ Thrust plate - VW 401-

- Thrust plate VW 402-
- Press tool VW 412-
- Tube VW 415 A-
- Tube VW 416 B-
- Inductive heater VAS 6414-
- -3- Splitter VAS 251 411 (Kukko 17-2)-





Note

Removing and installing 1st, 2nd and reverse gears is described

⇒ "1.2 Dismantling and assembling gear cluster", page 124.

Pressing off 4th gear wheel -2-


- 1 Splitter VAS 251 411 (Kukko 17-2)-
- First remove circlip ⇒ Item 31 (page 149).
- Detach spacer sleeve ⇒ Item 29 (page 149) from output shaft.

Pressing off 3rd gear wheel

A - Splitter - VAS 251 411 (Kukko 17-2)-



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.





Carefully prise open roller bearing -arrow B- at separation -arrow A- until it can be guided over shoulder of output shaft.




Note

If the seat for the roller bearing on the output shaft is damaged, the output shaft must be renewed.








Heating and pressing on 3rd gear wheel -1-

♦ Installation position:

Higher inside collar faces 4th gear.




Fitting spacer sleeve -2- and pressing on 4th gear wheel -1-

Installation position:

Higher inside collar faces upwards towards pressing tool.

Protected by copyright. Copying for private or commercial purposes, in permitted unless authorised by AUDI AG. AUDI AG does not guarante with respect to the correctness of information in this document. Cop



Selecting circlip -A- for 4th gear wheel on output shaft




Note

- 4th gear wheel pressed onto stop.
- The illustration shows a different component, but the procedure for selecting the circlip is the same.
- Determine the thickest circlip that will just fit and install it. For part number refer to ⇒ Electronic parts catalogue.

The following circlips are available:

Circlip thickness (mm)			
2.44	2.47	2.50	2.53
2.56	2.59	2.62	



39 – Final drive - differential

Oil seals

- ⇒ "1.1 Overview of fitting locations oil seals", page 154
- ⇒ "1.3 Renewing oil seal (right-side)", page 162
- ⇒ "1.2 Renewing oil seal (left-side)", page 158
- ⇒ "1.4 Renewing input shaft oil seal", page 163
- ⇒ "1.6 Renewing output shaft oil seal", page 166

1.1 Overview of fitting locations - oil seals

⇒ "1.1.1 Overview of fitting locations - oil seals in manual gearbox", page 154

 \Rightarrow "1.1.2 Overview of fitting locations - oil seals on four-wheel drive coupling quattro ultra ", page 157

1.1.1 Overview of fitting locations - oil seals in manual gearbox



Note

- ◆ The oil seals -2-, -9-, -10- and the sealing cap -8- can also be renewed with the gearbox installed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 39; Oil seals; Overview of fitting locations oil seals.
- ♦ Oil seals -6- and -13- and sealing cap -18- can only be renewed with the gearbox removed from the vehicle.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

1 - Flange shaft (right-side)

- Removing and installing ⇒ page 2
- Renewing with gearbox installed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 39; Differential; Removing and installing flange shaft (right-side)

2 - Oil seal

- ☐ For flange shaft (rightside)
- □ Renewing ⇒ page 162
- Renewing with gearbox installed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 39; Oil seals; Renewing oil seal (right-side)

3 - Cover for final drive

□ Renewing ⇒ page 203

4 - O-ring

- On cover for final drive
- Renew after removing
- □ Renewing ⇒ page 203

5 - Differential

- Exploded view ⇒ page 210
- Removing and installing ⇒ page 211

6 - Oil seal

- For flange shaft (leftside)
- □ Renewing ⇒ page 158

7 - Gearbox


- □ Dismantling and assembling ⇒ page 61
- Removing and installing ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox

8 - Sealing cap

- For output shaft
- Only for gearbox on vehicles with front-wheel drive
- Without oil guide
- Renew after removing
- □ Do not use additional lubricant on outer circumference for installation
- ☐ Renewing with gearbox installed ☐ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 39; Oil seals; Renewing oil seal (right-side)
- □ Removing ⇒ page 112
- □ Installing ⇒ page 112

9 - Oil seal

- □ For output shaft
- Only for gearbox on vehicles with four-wheel drive
- □ Renewing ⇒ page 166

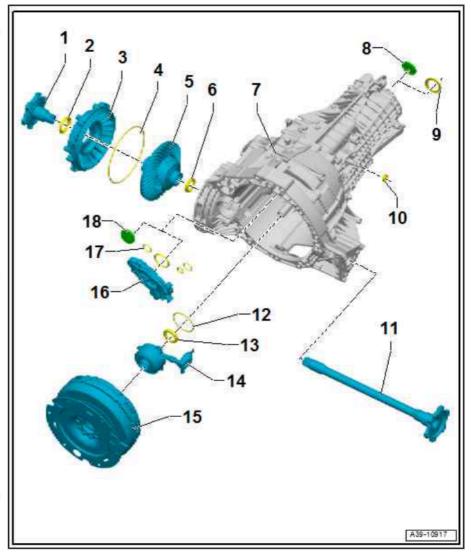

1	M	M	M	7
	业	义	义	J
	-		-	3

I0 - Oil seal
☐ For selector shaft
□ Removing and installing ⇒ page 110
□ Renewing with gearbox installed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Selector mechanism; Renewing selector shaft oil seal
11 - Flange shaft (left-side)
□ Removing and installing ⇒ page 219
12 - O-ring
☐ Renew after removing
I3 - Seal Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not □ For input shall purposes authorised by AUDI AG. AUDI AG does not guarantee or accept any liability □ Renewing ⇒ page 163
14 - Clutch slave cylinder with release bearing
☐ Removing and installing <u>⇒ page 19</u>
15 - Clutch module
☐ Removing and installing <u>⇒ page 30</u>
l 6 - Gear oil pump
☐ Only for gearbox with forced lubrication
☐ Driven via output shaft
□ Removing and installing ⇒ page 120
17 - Oil seals
 Only for gearbox with forced lubrication
☐ For gear oil pump
☐ Renew after removing
☐ Allocation ⇒ page 119
18 - Sealing cap
 Only for gearbox without forced lubrication
☐ With oil guide
□ For output shaft
□ Renew after removing
□ Do not use additional lubricant on outer circumference for installation
□ Renewing ⇒ "1.5 Renewing sealing cap for output shaft in gearbox housing", page 165




1.1.2 Overview of fitting locations - oil seals on four-wheel drive coupling "quattro ultra"

For extensive information on the four-wheel drive coupling -3-, refer to ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling .

1 - O-ring

- For four-wheel drive coupling input shaft
- Renew if damaged
- 2 Oil seal for four-wheel drive coupling input shaft
 - Removing and installing ⇒ Rear final drive; Rep. gr. 39; Oil seals; Éxploded view - oil seals
- 3 Four-wheel drive coupling
 - Removing and installing
 - Additional work necessary when renewing four-wheel drive coupling ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Exploded view - four-wheel drive coupling
 - □ Checking ATF level ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Checking fluid level
- 4 Breather
- 5 Dust ring
 - For rear splined shaft
 - Renew after removing
 - Removing and installing ⇒ Rear final drive; Rep. gr. 39; Oil seals; Exploded view - oil seals

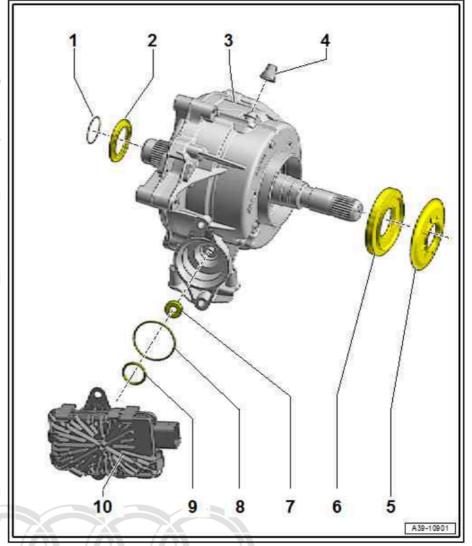

- 6 Oil seal for rear splined shaft
 - □ Removing and installing ⇒ Rear final drive; Rep. gr. 39; Oil seals; Exploded view oil seals
- 7 Oil seal for actuator shaft
- 8 O-ring
 - □ For all-wheel drive control unit
 - Renew after removing
- 9 O-ring
 - For all-wheel drive control unit
- Renew after removing opyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability 10 - All-wheel drive control unit - 1492 these of information in this document. Copyright by AUDI AG.

The following are integrated in the all-wheel drive control unit:


- Clutch actuator for all-wheel drive V622-
- Clutch position sender for all-wheel drive G969-

☐ Removing and installing ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Removing and installing control unit

1.2 Renewing oil seal (left-side)

Special tools and workshop equipment required

♦ Thrust piece - T40164-




Drip tray for workshop hoist - VAS 6208-




Sealing grease for oil seals ⇒ Electronic parts catalogue Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox.
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-.
- Tilt gearbox towards rear and slightly to left with gearbox support - T40173- to prevent gear oil from escaping.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

- Remove flange shaft (right-side) ⇒ page 223.
- Place drip tray VAS 6208- under the gearbox.



Unscrew bolts -arrows- and detach cover for final drive -1-.



Caution

Risk of damage to the differential.

- ♦ Detach cover for final drive from gearbox housing slowly and carefully. The differential may otherwise fall out of the
- ◆ A differential which has fallen to the ground can no longer be installed.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is no


- Carefully detach cover for final drive (some remaining gear oil may drain off).
- Carefully remove differential -1- and set it down on a soft surface.





Note

When doing so, do not lift the differential by holding onto the cage of the angular contact ball bearing -2-; instead, use the hole -arrow- for the flange shaft (right-side).

Remove flange shaft (left-side) -1- ⇒ page 219







Remove clutch module ⇒ page 30.




Caution

Risk of damaging clutch module when removing and installing

Refer to Workshop Manual

⇒ "2.3 Removing and installing clutch module", page 30 .



Press out oil seal with a screwdriver.




Caution

Risk of damage to fitting surface in gearbox housing. Copying for pri

Apply screwdriver with care.


permitted unless authorised by AUDI with respect to the correctness of i




Installing

Installation is carried out in reverse order; note the following:

Thoroughly clean area of gearbox housing leading to differential -arrow A-, and seat for oil seal -arrow B-.



- Lightly oil outer circumference of new oil seal and slide onto thrust piece - T40164-.
- Open side of oil seal faces towards thrust piece T40164-.
- Drive in oil seal onto stop (take care to keep seal straight).
- Pack space between sealing lip and dust lip half full with sealing grease for oil seals .




Fit differential -1-.




Note

When doing so, do not lift the differential by holding onto the cage

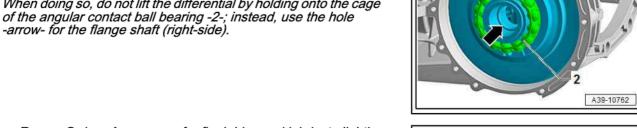


Renew O-ring -A- on cover for final drive and lubricate lightly with gear oil.




Install cover for final drive -1- and tighten bolts -arrows-.

Install flange shaft (right-side) ⇒ page 224. permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Install clutch module ⇒ page 30 .




Servicing 6-speed manual gearbox 0CS, 0DJ, 0CX - Edition 10.2017

- Thoroughly clean flange shaft (left-side).
- Install flange shaft (left-side) ⇒ page 222.
- After installing gearbox, fill up with gear oil and check gear oil level ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Gear oil.

Tightening torques

⇒ "2.1 Exploded view - final drive", page 169



1.3 Renewing oil seal (right-side)




Note


The flange shaft oil seal (right-side) can also be renewed with the gearbox installed in the vehicle ⇒ 6-speed manual gearbox 0CS, ODJ, OCX; Rep. gr. 39; Oil seals; Renewing oil seal (right side) immercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Special tools and workshop equipment required


Thrust piece - 3306 A-



- Sealing grease for oil seals ⇒ Electronic parts catalogue Removing
- Remove flange shaft (right-side) ⇒ page 223.




Remove flange shaft oil seal -arrow- (right-side) using an assembly lever.



Installing

Installation is carried out in reverse order; note the following:


- Lightly oil outer circumference of new oil seal.
- Drive in new oil seal for flange shaft (right-side) as far as stop; keep seal straight when installing.
- Pack space between sealing lip and dust lip half full with sealing grease for oil seals.
- Install flange shaft (right-side) ⇒ page 224.
- After installing gearbox, check gear oil level ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34 ; Gear oil; Checking gear oil level .



1.4 Renewing input shaft oil seal

Special tools and workshop equipment required

♦ Thrust plate - VW 402-

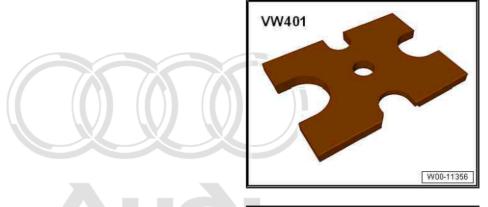

Press tool - VW 412-


Protected by copyright. Copying for private or commercial purpos permitted unless authorised by AUDI AG. AUDI AG does not guar with respect to the correctness of information in this document.




♦ Thrust pad - VW 447 i-




Assembly tool - T10030-




- Sealing grease for oil seals ⇒ Electronic parts catalogue
- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox.
- Remove flange shaft (left-side) -2- ⇒ page 219.
- Remove clutch module ⇒ page 30.
- Remove clutch slave cylinder with release bearing ⇒ page 19.
- Carefully lever off input shaft oil seal from clutch slave cylinder.
- Lightly oil outer circumference of new input shaft oil seal.
- Pack space between sealing lip and dust lip half full with sealing grease for oil seals.









Protected by copyright. Copying for private or commercial purposes, in part or in whole, is permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liab with respect to the correctness of information in this document. Copyright by AUDI AG.



- Then press oil seal -1- in further by dimension -a-.
- Dimension -a- = 0.5 mm
- To bring oil seal into correct installation position, use sleeve -VW 447 i- in place of thrust plate - T10030/1- .
- Install clutch slave cylinder with release bearing ⇒ page 19.
- Install clutch module ⇒ page 33.
- Install flange shaft (left-side) ⇒ page 222.


Tightening torques


⇒ "2.1 Exploded view - final drive", page 169

Renewing sealing cap for output shaft in 1.5 gearbox housing

Special tools and workshop equipment required


♦ Thrust plate - 30 - 205-






♦ Mandrel - 30 - 505-


♦ Extractor tool - T20143/2-

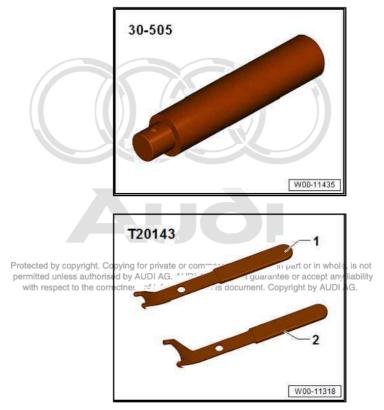

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox.
- Remove flange shaft (left-side) ⇒ page 219.
- Remove clutch module ⇒ page 30.
- Pierce through centre of sealing cap -A- for output shaft and prise out in direction of -arrow-.




Drive in new sealing cap for output shaft/until flush r commercial purposes
permitted unless authorised by AUDI AG. AUDI AG does not guar
with respect to the correctness of information in this document.



1.6 Renewing output shaft oil seal

Special tools and workshop equipment required


- ♦ Guide sleeve T40367/1-
- Thrust piece T40367/3-
- Extractor tool T20143/2-



Sealing grease; select correct type from ⇒ Electronic parts catalogue


Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox.
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-.
- Tilt gearbox forwards with gearbox support T40173- to prevent gear oil from escaping.



Remove four-wheel drive coupling -1- ⇒ page 229

Protected by copyright. Copying for private or commercial purposes, in part or in who permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept a with respect to the correctness of information in this document. Copyright by AUD




Lever out output shaft oil seal using extractor tool - T20143/2-.




Installing

- Insert guide sleeve T40367/1- -1- in rear splined shaft.
- Lightly oil outer circumference of oil seal.
- Pack space between sealing lip and dust lip half-full with sealing grease.
- Slide oil seal -2- over guide sleeve -1- and drive it in using thrust piece T40367/3- -3- until it is flush.



Install four-wheel drive coupling -1- ⇒ page 229.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

2 Final drive

- ⇒ "2.1 Exploded view final drive", page 169
- ⇒ "2.2 Exploded view pinion shaft", page 171
- ⇒ "2.3 Removing and installing pinion shaft", page 172
- ⇒ "2.4 Dismantling and assembling pinion shaft", page 174
- ⇒ "2.5 Table of adjustments final drive", page 178
- ⇒ "2.6 Adjusting pinion shaft", page 181
- ⇒ "2.7 Adjusting final drive", page 186
- ⇒ "2.8 Renewing cover for final drive", page 203

2.1 Exploded view - final drive




Note

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability

- The differential can be removed and installed without removing the selector mechanism, input shaft, output shaft, pinion shaft and gearbox cover.
- ♦ If you are renewing the cover for the final drive -7-, you must adjust the preload of the bearings for the differential ⇒ page 203 .
- If you are renewing the bearings of the differential, you must adjust the final drive ⇒ page 194.
- If you are renewing the differential, you must adjust the final drive ⇒ page 186.



- 1 Bolt
 - ☐ Steel bolts (M8x25)
 - □ 3x
 - ☐ 15 Nm +45°
- 2 Flange shaft (left-side)
 - With mounting bracket and ball bearing
 - Removing and installing ⇒ page 219
 - Renewing ball bearing or mounting bracket ⇒ page 225
- 3 Gearbox housing
- 4 Oil seal
 - ☐ For flange shaft (leftside)
 - □ Renewing ⇒ page 158
- 5 Differential with crown wheel
 - Removing and installing <u>⇒ page 211</u>
 - Installation position ⇒ page 210
- 6 O-ring
 - Lubricate with gear oil
 - Renew after removing
- 7 Cover for final drive
 - □ Renewing ⇒ page 203
- 8 Bolt
 - ☐ Steel bolts (M8x43)
 - ☐ 12x
 - ☐ 20 Nm +90°

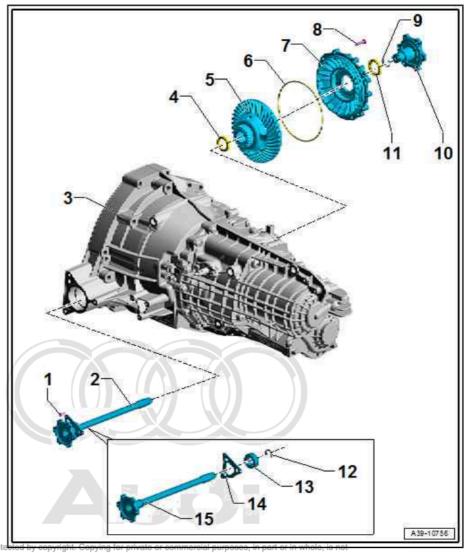

permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

- 9 Circlip
 - Renew after removing
 - □ Removing and installing ⇒ page 224
- 10 Flange shaft (right-side)
 - □ Removing and installing ⇒ page 223
- 11 Oil seal
 - ☐ For flange shaft (right-side)
 - □ Renewing ⇒ page 162
- 12 Circlip
 - Renew after removing
- 13 Ball bearing
 - ☐ For flange shaft (left-side)
 - □ Renewing ⇒ page 225
- 14 Mounting bracket
 - ☐ For flange shaft (left-side)
 - □ Renewing ⇒ page 225



- 15 Flange shaft (left-side)
 - □ Removing and installing ⇒ page 219


2.2 Exploded view - pinion shaft

1 - Circlip

- ☐ For compressor sleeve of pinion shaft
- Renew after removing
- Removing and installing ⇒ page 174

2 - Compressor sleeve

- □ Renew after removing
- ☐ Installation position: high shoulder -arrow Afaces upwards towards circlip
- 3 Circlip by copyright. Copying for private permitted unless authorised by AUDI AG. /
 - ☐ wFitein-annular groove on gearbox housing
 - Installation position: chamfer -arrow B- faces upwards and flat surface faces double angular contact ball bearing
- 4 Shim "S4"
 - Determining thickness <u>⇒ page 181</u>
- 5 Double angular contact ball bearing
 - Renew after removing
 - Installation position: annular groove -arrow Cfaces upwards towards compressor sleeve
 - Removing and installing ⇒ page 172
- 6 Pinion shaft
 - ☐ Can be renewed individually ⇒ Electronic parts catalogue
 - □ Removing and installing ⇒ page 172
 - Adjusting ⇒ page 181
- 7 Shim "S3"
 - □ Determining thickness ⇒ page 181
- 8 Gearbox housing

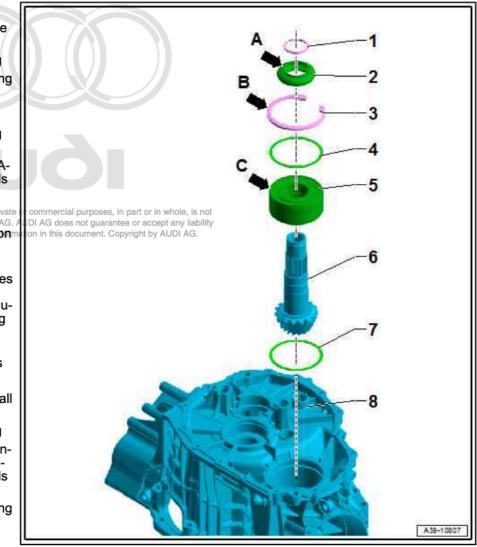


2.3 Removing and installing pinion shaft

Special tools and workshop equipment required



- Support rails VW 457-
- Adapter VW 771/44-
- Thrust pad from assembly tool 3301-
- Wheel bearing tube 3345-
- Hot air blower V.A.G 1416-
- Thrust piece T10266-


◆ -2- -Spindle- from puller - VAS 251 417 (Kukko 18-1)-



Removing


Protected by copyright. Copying for private or commercial purposes,

- Spur gear drive output gear is removed a page 92 in in this document. Col
- Remove circlip -1-.
- Before pulling out pinion shaft -3-, remove shim -2- to prevent it from becoming wedged in annular groove of gearbox hous-




Remove pinion shaft -3- as follows:

- Attach one spindle -1- of puller VAS 251 417 (Kukko 18-1)to adapter - VW 771/44- -5- and insert it into access hole in pinion shaft.
- Next, push nut -4- (M10) on until thread is flush with adapter -VW 771/44- .
- Then use nut -2- (M14) with washer to pull out pinion shaft -3-. When doing so, counterhold at hexagon flats of spindle -1- -arrow-.




Installing

- Heat gearbox housing in area of bearing seat -arrow- to approx. 100 °C with hot air blower - V.A.G 1416- .
- Insert shim "S 3" -1- into gearbox housing.



- Then insert pinion shaft -3- swiftly into gearbox housing as far as stop, taking care to keep it straight.
- Determine required shim "S 4" ⇒ page 181 and fit it on double angular contact ball bearing.
- Installation position of circlip -1-: chamfer -arrow- faces upwards and flat surface faces double angular contact ball bearing
- Fit circlip -1- in annular groove on gearbox housing.




2.4 Dismantling and assembling pinion shaft



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




Special tools and workshop equipment required

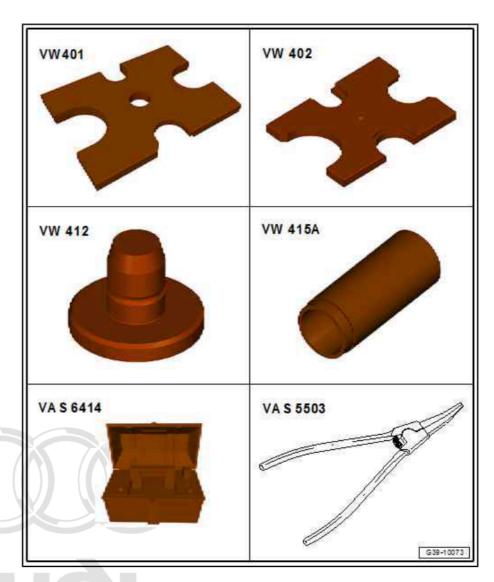


- ♦ Thrust plate VW 401-
- Thrust plate VW 402-
- Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not
 Pressitoo lies VWh4142-by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.
- ♦ Tube VW 415A-
- Inductive heater VAS 6414-
- ◆ Circlip pliers (drive shafts) VAS 5503A-

Splitter - VAS 251 411 (Kukko 17–2)-



Thrust piece -T40336-





Detaching circlip for compressor sleeve -1from pinion shaft

- Fit thrust piece -T40336- onto pinion shaft -2- so that groove on circlip -1- is centred in large opening on thrust piece.
- Squeeze compressor sleeve until circlip -1can be removed from groove on pinion shaft -2-.


Pressing off double angular contact ball bearing -2-

- Secure pinion shaft -3- to prevent it from falling.
- Splitter VAS 251 411 (Kukko 17-2)-



Note

If bottom inner ring of double angular contact ball bearing remains on pinion shaft, it must be pressed off separately using splitter -VÁS 251 411 (Kukko 17-2)- -1-.




Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




Pressing off inner ring of double angular contact ball bearing -2-

- Secure pinion shaft to prevent it from falling.
- Secure splitter -1- in groove on inner ring -arrow-.




Pressing double angular contact ball bearing -1- onto pinion shaft

- Installation position of double angular contact ball bearing -1-: Annular groove -arrow- faces upwards towards press tool.
- Heat double angular contact ball bearing to approx. 100 °C using inductive heater - VAS 6414- and press on as far as stop.



Install circlip -1- on pinion shaft as follows:


- First fit a new compressor sleeve -2- in installation position.
- Installation position of compressor sleeve: High shoulder -arrow- faces circlip -1-.
- Slide on new circlip -1- until it makes contact with compressor sleeve.



Protected by copyright. Copying for private or commercial purposes, in part or in who a, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUE

Bringing circlip for compressor sleeve -2- into installation position

- Fit thrust piece T40336- onto pinion shaft so that groove on circlip -2- is centred in small opening on thrust piece.
- Carefully squeeze compressor sleeve -1- using workshop press.
- Circlip must engage audibly in annular groove on pinion shaft.
- After pressing on, check that circlip is positioned in groove around entire circumference.



2.5 Table of adjustments - final drive

Adjusting pinion shaft and crown wheel



Note

- Careful adjustment of the crown wheel and pinion shaft is essential to ensure that the final drive gives long service and runs silently. The position of quietest running is found by moving the pinion shaft in an axial direction and at the same time lifting the crown wheel out of the zero-play mesh position by the amount necessary to maintain the backlash within the specified tolerance.
- The goal of this adjustment is to find the setting for quietest possible running.
- The pinion shaft and crown wheel with differential can be renewed independently of one another. If the pinion shaft or crown wheel is damaged after a period of operation of more than 100,000 km, it is advisable to renew both components.
- Observe the general repair instructions for bearings and
- Always renew the double angular contact ball bearing on the pinion shaft if the gear oil is contaminated with metal particles or when renewing the pinion shaft.


Adjustment of final drive gear set

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



- 1 Crown wheel with differential
- 2 Pinion shaft with attached double angular contact ball bearing, compressor sleeve and circlip
- 3 Double angular contact ball bearing
- M Distance from centre of differential to outer ring of double angular contact ball bearing
- R Actual distance between centre axis of crown wheel and face of pinion shaft in position of quietest running
 - □ Distance "R" = 60.00 mm for all final drive gear sets. There are no individual dimensions for allowance.
 - Set distance "R" on master gauge -VW 385/30- .

Vo - Hypoid offset

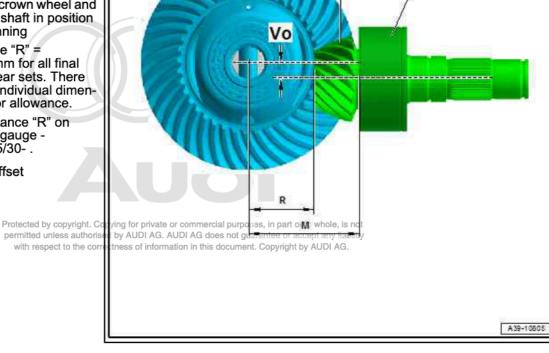

Position of shims



Note

Table of adjustments when renewing individual components of gearbox ⇒ page 180.

- S1 Shim for crown wheel in cover for final drive
- S2 Shim for crown wheel in gearbox housing
- S3 Shim for correct positioning of pinion shaft in gearbox housing
- S4 Shim for correct positioning of double angular contact ball bearing/pinion shaft in gearbox housing

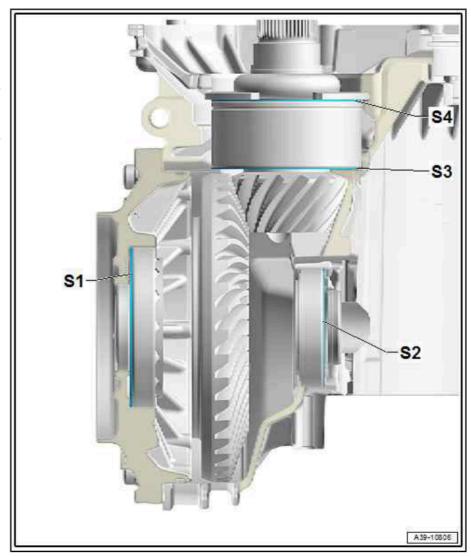


Table of adjustments



Note

- If repairs have been carried out on the gearbox, it is only necessary to re-adjust the pinion shaft or crown wheel (differential) if components were renewed which directly affect the setting of the final drive.
- No adjustments are required when renewing the double angular contact ball bearing on the pinion shaft.
- Refer to the following table to avoid unnecessary adjustment work:
 Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not

Components requiring adjustment in this docume	nt. Coppinion shaft	Crown wheel	Backlash
	("S 3" + "S 4")	("S ₁ " + "S ₂ ")	0.17 0.25 mm
	⇒ page 181	⇒ page 186	<u>⇒ page 191</u> or <u>⇒ page 199</u>
Component renewed			
Gearbox housing	X	X	X
Differential 1)		X	Х
Bearing for differential		Х	Х


Pinion shaft 1)	Х	Х	Х
Cover for final drive		Х	Х

¹⁾ It is not necessary to renew pinion shaft and differential (crown wheel) together.

Recommended sequence for adjusting gear set

The following work sequence is recommended to save time when the crown wheel (differential) and pinion shaft have to be adjusted:


- ◆ Determine total shim thickness "Stotal" (S₁ plus S₂) to obtain specified preload on differential tapered roller bearings.
- ♦ Determine shim thickness "S3" so that the dimension from the centre of the crown wheel to the face of the pinion shaft cor-or comm responds to the dimension determined during production of autorian in the dimension determined during production of autorian in the dimension determined during production of autorian in the dimension determined during production of autorian during during production of autorian during during production of autorian during du
- ♦ Shim "S 4" for correct positioning of double angular contact ball bearing/pinion shaft in gearbox housing
- ◆ Distribute total shim thickness "Stotal" (S₁ plus S₂) so that the specified backlash between crown wheel and pinion shaft is obtained.




2.6 Adjusting pinion shaft

Special tools and workshop equipment required

♦ Universal measuring tool - VW 385-




Gearbox support - T40206-



Hot air blower - V.A.G 1416-



Dial gauge, e.g. -VAS 6080-



Measuring pin - T40337-

Determining thickness of provisional shims "S3" and "S4"


- Secure gearbox housing onto gearbox support T40206-(gearbox housing must be in vertical position).
- Differential removed
- Double angular contact ball bearing pressed onto pinion shaft and compressor sleeve (with circlip) fitted ⇒ page 174
- Heat gearbox housing in area of bearing seat -arrow- to approx. 100 °C using hot air blower - V.A.G 1416- or similar.



Note

For measurement purposes the old (removed) shim -1-"S3" (1.05 mm in this example) is inserted provisionally. This is referred to in the following as "S3*". "S3*" is exchanged with the final shim "S3" after determining distance "R".

Insert old shim "S 3*" -1- (1.05 mm in example) into gearbox housing.





Then insert pinion shaft -3- swiftly by hand into gearbox housing as far as stop, taking care to keep it straight.

Determine the provisional shim "S4" -2- as follows:

Formula: "S 4" = 2.76 mm - "S 3*"

Example:

Constant value	2.76 mm
- Thickness of old shim "S3*"	1.05 mm
= Thickness of provisional shim "S ₄ "	1.71 mm



Note

For measurement purposes a shim "S4" with a thickness of 1.71 mm is inserted provisionally. This is referred to in the following as "S4"". "S4" is exchanged with the final shim "S4" after determining distance "R".


- Place provisional shim "S4*" -2- onto double angular contact ball bearing.
- Installation position of circlip -1-: chamfer -arrow- faces upwards and flat surface faces double angular contact ball bear-
- Fit circlip -1- in annular groove on gearbox housing ng for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability Setting dimension "R" with respect to the correctness of information in this document. Copyright by AUDI AG.




Note

Dimension "R" must be set on the master gauge - VW 385/30- to determine the final shim thickness of "S3" and "S4" for this particular final drive gear set.

- Set adjustment rings of universal measuring tool VW 385/1to the following values:
- ◆ Dimension -a- = 38 mm
- Dimension -b- = 58 mm





- Assemble universal measuring tool VW 385/1- as illustrated:
- Dial gauge extension -VW 385/15-, 9.3 mm long
- Set master gauge VW 385/30- to dimension "R" = 60.00 mm and place onto universal measuring tool - VW 385/1-.



Note

Distance "R" = 60.00 mm for all final drive gear sets. There are no individual dimensions for allowance.


- Set dial gauge (3 mm measuring range) to "0" with 2 mm preload.
- Place end measuring plate VW 385/33- on face of pinion gear.




Note

Ensure contact surface of end measuring plate - VW 385/33- fits exactly and is free of oil.

Detach master gauge - VW 385/30- and insert universal measuring tool - VW 385/1- in gearbox housing.






Protected by copyright. Copying for private or co

When turning universal measuring too mitting in the contact that dial gauge extension -VW 385/15- does not make contact with magnet -arrow- of end measuring plate .

- The dial gauge faces towards the final drive cover.
- Flange shaft oil seal (right-side) is removed from final drive cover.
- The O-ring is fitted into cover for final drive.





- Fit final drive cover -1- and tighten the 4 bolts -2- to specified torque ⇒ Item 8 (page 170).
- Using the adjustable ring, pull 2nd centring disc VW 385/43out as far as possible so that the universal measuring tool can still just be turned by hand.
- Turn universal measuring tool until tip of dial gauge touches end measuring plate on face of pinion gear, and measure maximum deflection (return point).
- ♦ Measurement in following example = 0.09 mm (in red scale)



Note

After removing universal measuring tool , check once again that the dial gauge indicates "0" with 2 mm preload when master gauge - VW 385/30- is in place.

Determining thickness of shim "S3"

- Subtract value if measurement is obtained on red scale.
- ◆ Add value if measurement is obtained on black scale.

Formula:

"S3" = "S3*" + "measured value" ("measured value" on black scale)

"S3" = "S3*" - "measured value" ("measured value" on red scale)

Example:

Inserted shim "S3*"	1.05 mm
- Measured value (in red scale)	0.09 mm
= Thickness of shim "S3"	0.96 mm


Select shim from table; refer to ⇒ Electronic parts catalogue for part number.

Available shims for "S3" and "S4"


Shim thickness (mm)					
0.45	0.81	1.17	1.53	1.89	
0.49	0.85	1.21	1.57	1.93	
0.53	0.89	1.25	1.61	1.97	
0.57	Protected by cop	yright. Copying for particular of authorised by AUD	rivate pr 65 mmero	ial purposes, in pa es not quarantee o	rt or in whole, is not r accept any liability
0.61	v 0 :19 7 spect to	the correction the correction	informati69in this	docun 2 :05 opyri	tht by AUDI AG.
0.65	1.01	1.37	1.73	2.09	
0.69	1.05	1.41	1.77	2.13	
0.73	1.09	1.45	1.81		
0.77	1.13	1.49	1.85		

Tolerance variations make it possible to obtain the exact shim thickness required.

- Remove pinion shaft with old shims "S3*" and "S4*" ⇒ page 172 .



- Heat gearbox housing in area of bearing seat -arrows- to approx. 100 °C with hot air blower V.A.G 1416-.
- If necessary, cool down double angular contact ball bearing on pinion shaft, e.g. using commercially available chilling spray.
- Insert selected shim "S3" -1- (0.97 mm in example) into gearbox housing.



Then insert pinion shaft 3 swiftly into gearbox housing as far whole, is
as stop, taking care to be constructed by a stage of the stage of the construction of the stage of the construction of the stage of the stag

Determining thickness of shim "S4"

Formula: "S 4" = 2.76 mm - "S 3"

Example:

Constant value	2.76 mm
- Thickness of shim "S3"	0.97 mm
= Thickness of shim "S4"	1.79 mm

Determine the shim "S₄" from table ⇒ page 185.

- Fit determined shim "S 4" -2- (1.81 mm in example) onto double angular contact ball bearing.
- Installation position of circlip -1-: chamfer -arrow- faces upwards and flat surface faces double angular contact ball bearing
- Fit circlip -1- in annular groove on gearbox housing.

Checking dimension "R"

- Install pinion shaft with appropriate measured shims "S₃" and "S₄".
- Insert universal measuring tool and check adjustment.
- Read off measurement.
- If the shims have been correctly selected, the dimension "R" should be indicated within a tolerance of ± 0.04 mm.





Note

After removing universal measuring tool, check once again that the dial gauge indicates "0" with 2 mm preload when master gauge - VW 385/30- is in place.

2.7 Adjusting final drive


- ⇒ "2.7.1 Adjusting final drive when renewing gearbox housing or pinion shaft", page 186
- ⇒ "2.7.2 Adjusting final drive (if renewing differential or bearings for differential)", page 194
- 2.7.1 Adjusting final drive when renewing gearbox housing or pinion shaft








Special tools and workshop equipment required

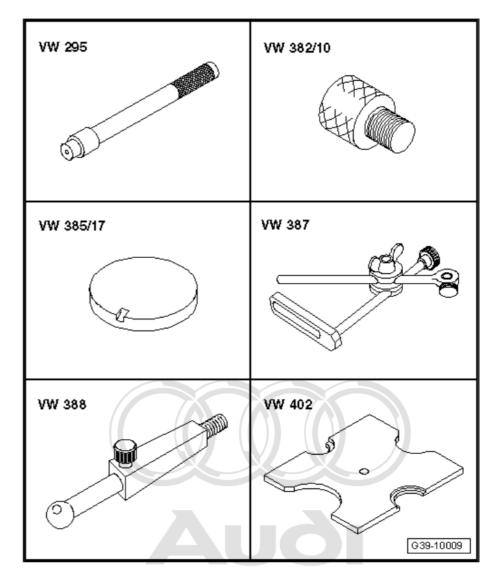


- ◆ Drift VW 295-
- ♦ Dial gauge extension VW 382/10-
- ♦ Measuring plate VW 385/17-
- ♦ Universal dial gauge bracket VW 387-
- ◆ Adjustable measuring lever VW 388-
- ♦ Thrust plate VW 402-

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

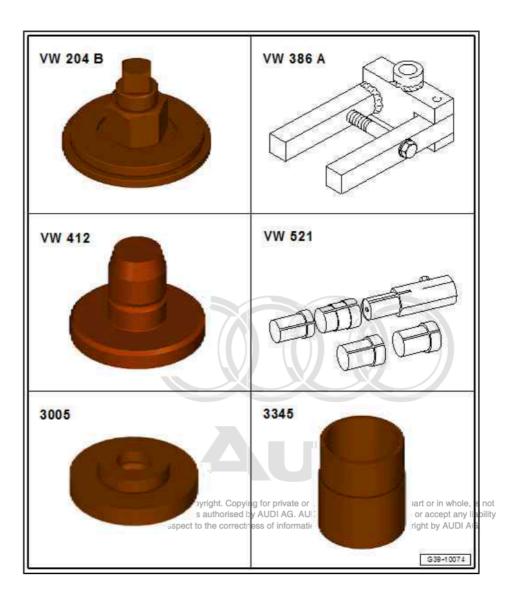


- Crankshaft seal fitting tool VW 204 B-
- Drive pinion clamp VW 386A-
- Press tool VW 412-
- Crown wheel adjusting tool VW 521-
- Thrust plate 3005-
- Wheel bearing tube 3345-
- ♦ Plate 2036/1- from valve assembly device 2036-



Dial gauge , e.g. -VAS 6080-







Note

- Careful adjustment of the final drive is essential to ensure that part or in whole, is not it gives long service and runs silently UDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.
- When renewing only the differential or the differential bearings, it is not necessary to remove the pinion shaft. In this case, follow the procedure on ⇒ page 194.
- Table of adjustments ⇒ page 180
- The final drive must be readjusted if the gearbox housing or the pinion shaft have been renewed.
- Pinion shaft removed ⇒ page 172.
- The gearbox must be secured to the assembly stand, and the clutch module with the flange shaft (right-side) must be removed.

Determining total shim thickness "Stotal" for shims "S1" + "S2"


(Setting preload of differential bearings)

- Remove flange shaft oil seals
- Remove outer bearing races for differential from gearbox housing and final drive cover, and take out shims ⇒ page 210 .
- Drive outer race of tapered roller bearing (left-side) with shim "S2" into gearbox housing. For measurement purposes use a 0.65 mm thick "S2*" shim.



Note

- ◆ For measurement purposes a shim "S2" with a thickness of 0.65 mm (in this example) is inserted provisionally. This is referred to in the following as "S2*". "S2*" is exchanged with the final shim "S2" after determining backlash.
- Available shims ⇒ page 193 ; select shims from ⇒ Electronic parts catalogue .



Press outer race for angular contact ball bearing (right-side) with provisional shim "S1" into cover for final drive. For measurement purposes use a 1.05 mm thick "S₁*" shim.

Larger diameter of -VW 204 B- faces outer ring for angular contact ball bearing.



Note


- For measurement purposes a 1.05 mm thick shim "S1" is inserted provisionally. This is referred to in the following as "S1*". "S1*" is exchanged with the final shim "S1" after determining backlash.
- Available shims ⇒ page 194 ; select shims from ⇒ Electronic parts catalogue .
- Install differential in gearbox housing. The crown wheel is positioned on the right-hand side (same side as cover for final drive).
- The O-ring is fitted into cover for final drive.
- Carefully secure cover for final drive with 4 bolts (tighten to 20 Nm in diagonal sequence).
- Turn gearbox so that cover for final drive points upwards.
- Turn differential 5 turns in both directions to settle bearings.
- Place measuring plate VW 385/17- on differential.
- Attach measuring equipment to gearbox housing.
- Set dial gauge (3 mm measuring range) -A- to "0" with 2 mm preload.




Note

The tip of the dial gauge must be applied to the centre of the differential. Protected by copyright. Copying for private permitted unless authorised by AUDI AG. A

- Raise differential without turning, read clearance off dial gauge and note down.
- Measurement in following example: 0.25 mm










Note

- Secure special tools -VW 521/4- and -VW 521/5- on left side of differential (housing side) to lift differential.
- ♦ Ensure that crown wheel adjusting tool VW 521- does not make contact with gearbox housing -arrow-.
- If the measurement has to be repeated, the differential must again first be turned 5 turns in each direction to settle the

Formula: "S total" = "S 1*" + "S 2*" + measured value + bearing preload



Example:

Inserted shims "S 1*" + "S 2*"	1.70 mm
+ Measured value	0.22 mm
+ Bearing preload (constant value)	0.30 mm
= Total shim thickness "Stotal" for "S1" + "S2"	2.22 mm

Provisional shim "S 1*" with thickness 1.05 mm remains installed in final drive cover.

Determining thickness of provisional shim "S2*"



Note

- Provisional shim "S2" is replaced with final shim "S2" after determining backlash.
- Total shim thickness "Stotal" remains unchanged.

Formula: "S2*" = "Stotal" - "S1*"

Example:

Total shim thickness "Stotal" for "S1" + "S2"	2.22 mm
- Inserted shim "S ₁ *"	1.05 mm

= Thickness of shim "S2*"

Protected by copyright. Copying for private or commercial purpos 1.17 mm

Available shims ⇒ page 193 is select shims from in Flectronic Copyright by AUDI AG. parts catalogue.

Measuring backlash

- Pinion shaft fitted with shims "S₃" and "S₄" ⇒ page 172.
- The O-ring is fitted into cover for final drive.
- Install differential with shims: "S1*" is fitted on cover side, "S2*" in gearbox housing.




Caution


Risk of damage to the gear set

- Check backlash when tightening cover for final drive. There must always be a certain amount of play.
- Check play by turning pinion shaft back and forth.

- Fit cover for final drive and tighten bolts to 20 Nm.
- Assemble crown wheel adjusting tool VW 521- ⇒ page 198 and insert in differential.
- Turn differential 5 turns in both directions to settle bearings.



- Secure universal dial gauge bracket VW 387- to cover for final drive -arrow-.
- Insert dial gauge , e.g. -VAS 6080- with dial gauge extension - VW 382/10- (6 mm, flat).
- Adjust measuring lever VW 388- to distance "a" = 79 mm (for Ø 196 mm crown wheel).





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



- Pinion shaft must be locked in place to ensure that backlash can be measured exactly.
- To do so, secure bracket 2036/1- to gearbox housing with bolts -arrows A-.
- Secure clamping piece for pinion shaft VW 386A- with bolt -arrow B-.

Measure play between teeth faces (backlash) as follows:

- Turn crown wheel until it makes contact with the face of one tooth (end of backlash travel).
- Preload dial gauge to 2 mm and set to "0".
- Turn back crown wheel until it makes contact with opposite tooth face (backlash).
- Take backlash reading and note down measured value.
- Turn crown wheel through 90° another three times, repeating measurement each time; unfasten clamping piece for pinion shaft - VW 386A- to do so.

Determining average backlash

Add the four measured values together and divide by four.

Example:

1st measured value	0.54 mm
+ 2nd measured value	0.53 mm
+ 3rd measured value	0.55 mm
+ 4th measured value	0.54 mm
= Sum of measured values	2.16 mm

Result: the average backlash is 2.16 mm: 4 = 0.54 mm

Determining thickness of shim "S2"

Formula: "S2" = "S2*" - measured backlash + specified backlash

Example:


Example.	
Previous shim "S2*"	1.17 mm
- Measured average backlash	0.54 mm
 Specified backlash (desired average value for backlash) 	0.21 mm
= Thickness of shim "S2"	0.84 mm

Select shim from table; refer to ⇒ Electronic parts catalogue for part number.

Available shims for "S2"

Shim thickness (mm)				
0.37	0.65	0.93	1.21	1.49
0.41	0.69	0.97	1.25	1.53
ProteOte45y copy	right. Op 7,3 for p	ivate of Ontmercia	al purposes, in par	or in 1,57 , is not
permitted unless with respect to	authorized by AUDI the correctness of i	AG. AUD 6G doe	s not guazantee or locument. Copyrig	accept apyliability
0.53	0.81	1.09	1.37	1.65
0.57	0.85	1.13	1.41	
0.61	0.89	1.17	1.45	

Tolerance variations make it possible to obtain the exact shim thickness required.





Determining thickness of shim "S₁"

Formula: "S₁" = "S_{total}" - "S₂"

Example:

Total shim thickness "Stotal" for "S1" + "S2"	2.22 mm
- Thickness of shim "S2"	0.84 mm
= Thickness of shim "S ₁ "	1.38 mm

Select shim from table; refer to ⇒ Electronic parts catalogue for part number.

Available shims for "S1"

Shim thickness (mm)				
0.65	0.89	1.13	1.37	1.61
0.69	0.93	1.17	1.41	1.65
0.73	0.97	1.21	1.45	1.69
0.77	1.01	1.25	1.49	1.73
0.81	1.05	1.29	1.53	1.77
0.85	1.09	1.33	1.57	

Tolerance variations make it possible to obtain the exact shim thickness required.

Remove old shims "S1*" and "S2*" and fit selected new shims ⇒ page 210 .


Checking adjustment

- After installing shims "S1" and "S2", turn differential 5 turns in both directions so that the tapered roller bearings settle.
- Measure backlash four times on circumference.
- Specification: 0.17 ... 0.25 mpermitted unless authorised by AUDI AG. AUDI AG does with respect to the correctness of information in this do



Note

Adjustment must be repeated if backlash is outside tolerance. The total shim thickness "Stotal" must remain unchanged.




2.7.2 Adjusting final drive (if renewing differential or bearings for differential)



Special tools and workshop equipment required VW 204 B VW 295a 382/10 in part or in whole, is not Protected by copyright. Copying for private or c VW 385/33 permitted unless authorised by AUDI AG. AUD with respect to the correctness of information n this document. Copyright by AUDI AG. VW 387 **VW 388**

- ◆ Crankshaft seal fitting tool VW 204 B-
- ♦ Punch VW 295 A-
- ◆ Dial gauge extension VW 382/10-
- ♦ Measuring plate VW 385/33-
- ◆ Universal dial gauge bracket VW 387-
- ♦ Adjustable measuring lever VW 388-

G39-10071

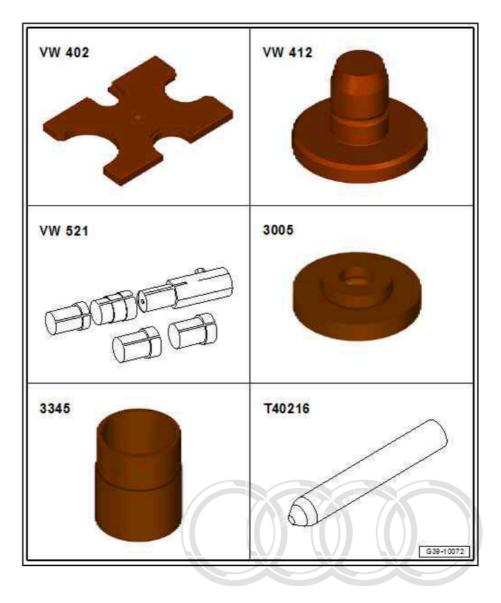

- Thrust plate VW 402-
- Press tool VW 412-
- Crown wheel adjusting tool VW 521-
- Thrust plate 3005-
- Wheel bearing tube 3345-
- Guide pin T40216-
- Wedge T10161-




Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Dial gauge , e.g. -VAS 6080-



Protected by copyright. Copying for private or commercial purposes, in part of permitted unless authorised by AUDI AG. AUDI AG does not guarantee or a with respect to the correctness of information in this document. Copyright





Note

Careful adjustment of the differential is essential to ensure that the final drive gives long service and runs silently.

- The final drive (differential) must be adjusted when the differential and the bearings of the differential have been renewed.
- The pinion shaft remains installed; for which reason backlash must always be present during the adjustment process. Otherwise the gear set will be damaged.
- The gearbox must be secured to the assembly stand, and the clutch module with the flange shaft (right-side) must be removed.


Determining total shim thickness "Stotal" for shims "S1" + "S2"

- Pull tapered roller bearing outer race (left-side) out of gearbox housing ⇒ page 217.
- Drive new tapered roller bearing outer race (left-side) with old shim "S2" (1.25 mm in example given) into gearbox housing.



Note

The old shim "S2" (1.25 mm thick in the example given) is inserted for measurement purposes This is referred to in the following as "S2*". "S2*" is exchanged with the final shim "S2" after determining backlash.




- Press new outer race for angular contact ball bearing (rightside) with old shim "S1" into cover for final drive. When doing so, larger diameter of -VW 204 B- faces outer race.
- Install differential in gearbox housing.



Caution

Risk of damage to the gear set

- Check backlash when tightening cover for final drive. There must always be a certain amount of play.
- If gearbox is dismantled, check play at pinion shaft by turning it back and forth.
- If gearbox is not dismantled, insert crown wheel adjusting tool - VW 521- and check play.




Copying for private or commercial purposes, in part or in whole, is not rised by AUDI AG. AUDI AG does not guarantee or accept any liability rrectness of information in this document. Copyright by AUDI AG.


Carefully secure cover for final drive with 4 bolts (tighten to 20 Nm in diagonal sequence).

Assemble crown wheel adjusting tool - VW 521- as follows:

Fit sleeve - VW 521/13- with smaller outer diameter -arrowonto mandrel - VW 521/4- .




Insert crown wheel adjusting tool - VW 521- and turn differential 5 turns in both directions to settle bearings.





- Remove crown wheel adjusting tool VW 521- and attach measuring tools to gearbox housing as follows:
- Secure universal dial gauge bracket VW 387- to threaded hole in gearbox housing with bolt -A-.
- Apply dial gauge extension to centre of measuring plate -VW 385/33- .
- Set dial gauge, e.g. -VAS 6080- to »0« with 1 mm preload.
- Slacken 4 bolts -arrows- by one turn in diagonal sequence.
- Check reading on dial gauge.
- Specification: 0.25 ... 0.30 mm






Note

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability


- If specified measured value is not achieved, or if no backlash is discernible, correct thickness of shims "S1" and "S2".
- Select correct shims from ⇒ Electronic parts catalogue .

Measuring backlash

- Differential fitted with shims "S1" and "S2".
- Install differential with crown wheel: S1 is fitted on cover side, S2 in gearbox housing.
- Fit cover for final drive and tighten bolts to 20 Nm.
- Assemble crown wheel adjusting tool VW 521- ⇒ page 198 and insert in differential.
- Turn differential 5 turns in both directions to settle bearings.



Screw guide pin - T40216- onto selector shaft -1-.




Remove bolts -1- and carefully lever off selector shaft cover



Lift selector shaft slightly -arrow A- and pull it out -arrow B-.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




- Then turn gearbox in assembly stand or engine and gearbox support - VAS 6095- so that gearbox cover -3- faces upwards.
- Remove bolts -1- securing bearing mounting to gearbox cover, and bolts -2- securing gearbox cover -3- to gearbox housing



Note


When fitting gearbox cover, note that bolts marked with -arrowsare longer.

Take off gearbox cover -3-.





Insert wedge - T10161- between spur gear drive output gear -1- and gearbox housing.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Secure universal dial gauge bracket - VW 387- to cover for final drive -arrow-.



Note

The attachment point for the universal dial gauge bracket -arrow- may differ slightly from the illustration.

- Insert dial gauge, e.g. -VAS 6080- with dial gauge extension VW 382/10- (6 mm, flat).
- Set measuring lever VW 388- to dimension "a" = 79.0 mm.

Measure play between teeth faces (backlash) as follows:

- Turn crown wheel until it makes contact with the face of one tooth (end of backlash travel).
- Preload dial gauge to 2 mm and set to "0".
- Turn back crown wheel until it makes contact with opposite tooth face (backlash).
- Take backlash reading and note down measured value.
- Turn crown wheel through 90° and repeat measurement another 3 times. To turn further, remove wedge - T10161- between spur gear drive output gear and gearbox housing ⇒ page 201



Add the four measured values together and divide by four.

-Admpio.	
1st measured value	0.23 mm
+ 2nd measured value	0.25 mm
+ 3rd measured value	0.25 mm
+ 4th measured value	0.23 mm

Protected by copyright. Copying 0:96\mm commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability = Sum of measured values

• Result: the average backlash is 0.96 mm. 4 = 0.24 mm

Determining thickness of shim "S2"

Formula: "S2" = "S2*" - measured backlash + specified backlash

Example:

Previous shim "S2*"	1.25 mm
- Measured average backlash	0.24 mm
 Specified backlash (desired average value for backlash) 	0.21 mm
= Thickness of shim "S2"	1.22 mm


Available shims for "S2" ⇒ page 193 : for part number refer to ⇒ Electronic parts catalogue.

Determining thickness of shim "S₁"

Formula: "S₁" = "S_{total}" - "S₂"

Example:

Total shim thickness "Stotal" for "S1" + "S2"	2.17 mm
- Thickness of shim "S2"	1.22 mm
= Thickness of shim "S ₁ "	0.95 mm





Available shims for "S₁" ⇒ page 194 : for part number refer to ⇒ Electronic parts catalogue.

Remove old shims "S₁*" and "S₂*" and fit selected new shims ⇒ page 210 .


Checking adjustment

- After installing shims "S₁" and "S₂", turn differential 5 turns in both directions so that the tapered roller bearings settle.
- Measure backlash four times on circumference.
- Specification: 0.17 ... 0.25 mm



Note

Adjustment must be repeated if backlash is outside tolerance. The total shim thickness "Stotal" must remain unchanged.



2.8 Renewing cover for final drive



Note

- When renewing cover for final drive, determine thickness of new shim to adjust preload of bearings for differential.
- ♦ This shim is located behind the outer race of the angular contact ball bearing in the cover for the final drive.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




- Crankshaft seal fitting tool VW 204 B-
- Measuring plate VW 385/33-
- Universal dial gauge bracket VW 387-
- Thrust plate VW 402-
- Press tool VW 412-
- Wheel bearing tube 3345-
- Hub grease cap puller VW 637/2-




939-10068


♦ Ruler - T40100-




♦ Gauge block - T40101-



♦ Dial gauge - VAS 6080A-




◆ Digital depth gauge , e.g. -VAS 6087-




Protected by copyright. Copying for private or commen permitted unless authorised by AUDI AG. AUDI AG do with respect to the correctness of information in this

-1- Internal puller - VAS 251 619 (Kukko 21/89)-



- -4- Counter-support VAS 251 625 (Kukko 22/4)-
- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox
- Secure gearbox to gearbox support ⇒ page 116.
- Turn gearbox so that cover for final drive points upwards.
- Remove flange shaft (right-side) ⇒ page 223.
- Remove flange shaft oil seal -arrow- (right-side) using an as-Protected by copyright. Copying for private or compermitted unless authorised by AUDI AG. AUDI AG sembly lever. with respect to the correctness of information in




Unscrew bolts -arrows- and detach cover for final drive -1-.




Note

To facilitate removal of the outer race for the angular contact ball bearing, heat up the cover for final drive to approx. 100 °C using the hot air blower - V.A.G 1416- .





Then press outer race for angular contact ball bearing slightly off bearing seat by applying hub grease cap puller - VW 637/2-continuously in small stages and pressing in direction of -arrow-.



- Then pull out outer race for angular contact ball bearing -3using internal puller -2- and counter-support -1-.
- Counter-support VAS 251 625 (Kukko 22/4)-1 -
- Internal puller 56 ... 110 mm VAS 251 619 (Kukko 21/89)-
- Remove existing shim.



Protected by copyright. Copying for private or commercial purposes, in par permitted unless authorised by AUDI AG. AUDI AG does not guarantee of with respect to the correctness of information in this document. Copyright by AUDI AG.

Determining thickness of shim

Measure dimension -a- on old cover and new cover as follows:

- Position gauge blocks T40101- opposite one another on joint surface of final drive cover.
- Place ruler T40100- on edge on top of these gauge blocks.
- Using a digital depth gauge (e.g. digital depth gauge VAS 6087-), measure down into seat for outer race of angular contact ball bearing.

Example:

Dimension -a- on old cover for final drive	82.05 mm
Dimension -a- on new cover for final drive	82.20 mm
Difference	= 0.15 mm

- Install thicker shim if dimension -a- is smaller on new cover.
- Install thinner shim if dimension -a- is greater on new cover.

Example:

New shim	= 1.15 mm
Difference	- 0.15 mm
Existing shim	1.30 mm



Note


Select correct shim from ⇒ Electronic parts catalogue .


- The shim thickness in this example is 1.15 mm.
- Install new shim of required thickness in new cover for final drive.
- Press in outer race for angular contact ball bearing onto stop; larger diameter of -VW 204 B- faces towards outer race.



Note

Support cover for final drive with -3345- directly below bearing seat.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



A39-10354

VW 387

VW 385/33

Check adjustment of preload of bearings for differential as follows:


- Fit cover for final drive without O-ring and tighten 4 bolts -arrows-.
- Attach measuring equipment to gearbox housing.
- Secure universal dial gauge bracket VW 387- to threaded hole in gearbox housing with bolt -A-.
- Apply dial gauge extension to centre of measuring plate -VW 385/33- .
- Set dial gauge, e.g. -VAS 6080- to »0« with 1 mm preload.
- Slacken 4 bolts -arrows- by one turn in diagonal sequence.
- Check reading on dial gauge.
- It should be 0.25 ... 0.30 mm for bearings with low miles age authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Note

For bearings with high mileage, measured value must be at least 0.05 mm.


- Renew O-ring -A-.
- Lightly lubricate new O-ring with gear oil.



- Install cover for final drive -1- and tighten bolts -arrows- to specified torque.
- Install new flange shaft oil seal (right-side) ⇒ page 163.
- Install flange shaft (right-side) ⇒ page 224.
- If gear oil has been drained off, fill up gearbox with gear oil and check oil level ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Gear oil.

Tightening torques

⇒ "2.1 Exploded view - final drive", page 169



3 Differential

- ⇒ "3.1 Exploded view differential", page 210
- ⇒ "3.2 Removing and installing differential", page 211
- ⇒ "3.3 Dismantling and assembling differential", page 213
- ⇒ "3.4 Removing and installing flange shaft (left-side)", page 219
- ⇒ "3.5 Removing and installing flange shaft (right-side)", page 223
- ⇒ "3.6 Renewing mounting bracket and ball bearing for flange shaft (left-side)", page 225

3.1 Exploded view - differential



Note

- Observe the general repair instructions for bearings and shims ⇒ page 5.
- Always renew both bearings for differential together.
- Adjustment work is required when renewing the parts marked with $^{1)} \Rightarrow page 180$.
- 1 Gearbox housing 1)
- 2 Shim "S2"
 - Note thickness
 - If bearings for differential are renewed, thickness of required shim must be determined ⇒ page 194
- 3 Tapered roller bearing outer race 1)
 - □ Pulling out ⇒ page 217
 - □ Driving in ⇒ page 217
- 4 Tapered roller bearing inner race 1)
 - □ Pulling off ⇒ page 217
 - Pressing on ⇒ page 218
- 5 Differential with crown wheel 1)
 - Crown wheel cannot be removed from differential
 - Differential bevel gears cannot be renewed
- 6 Inner race for angular contact ball bearing 1)
 - □ Pulling off ⇒ page 218
 - Pressing on ⇒ page 218





- 7 Outer race for angular contact ball bearing 1)
 - Removing ⇒ page 219 and ⇒ page 219
 - □ Pressing in ⇒ page 219
- 8 Shim "S1"
 - Note thickness
 - If bearings for differential or cover for final drive are renewed ⇒ Item 9 (page 211), thickness of required shim must be determined ⇒ page 194
- 9 Cover for final drive 1)
 - ☐ If renewed, re-determine thickness of shim "S₁" ⇒ page 203

3.2 Removing and installing differential



Note

Before carrying out assembly work on differential, drain off gear oil, secure gearbox to assembly stand and remove clutch module with flange shaft (right-side) ⇒ page 61.

Special tools and workshop equipment required


Drip tray for workshop hoist - VAS 6208-




Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox.
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-.
- Tilt gearbox towards rear and slightly to left with gearbox support - T40173- to prevent gear oil from escaping.
- Place drip tray VAS 6208- under the gearbox.

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Remove flange shaft (right-side) ⇒ page 223.




Unscrew bolts -arrows- and detach cover for final drive -1-.



Caution

Risk of damage to the differential itted unless authorised by AUDI AG. AUDI A

- ◆ Detach cover for final drive from gearbox housing slowly and carefully. The differential may otherwise fall out of the gearbox.
- A differential which has fallen to the ground can no longer be installed.



Carefully remove differential -1- and set it down on a soft surface.



Note

- When doing so, do not lift the differential by holding onto the cage of the angular contact ball bearing -2-; instead, use the hole -arrow- for the flange shaft (right-side).
- If tapered roller bearing outer race (left-side) of differential requires renewal, first remove flange shaft (left-side) *⇒ page 219* .




Installation is carried out in reverse order; note the following:


Fit differential -1-.




Note


When doing so, do not lift the differential by holding onto the cage of the angular contact ball bearing -2-; instead, use the hole -arrow- for the flange shaft (right-side).







Renew O-ring -A- on cover for final drive and lubricate lightly with gear oil.



- Install cover for final drive -1- and tighten bolts -arrows-.
- Install flange shaft (right-side) ⇒ page 224.



Note

If previously removed, install flange shaft (left-side) *⇒ page 222* .

After installing gearbox, fill up with gear oil and check gear oil level ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Gear oil; Checking gear oil level .

Tightening torques

♦ ± "2.1 Exploded view - final drive", page 169

3.3 Dismantling and assembling differential




Note


- Observe the general repair instructions for bearings and shims *⇒ page 5* .
- Before carrying out assembly work on differential, drain off gear oil, secure gearbox to assembly stand and remove clutch module with flange shaft (right-side) ⇒ page 61.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Special tools and workshop equipment required

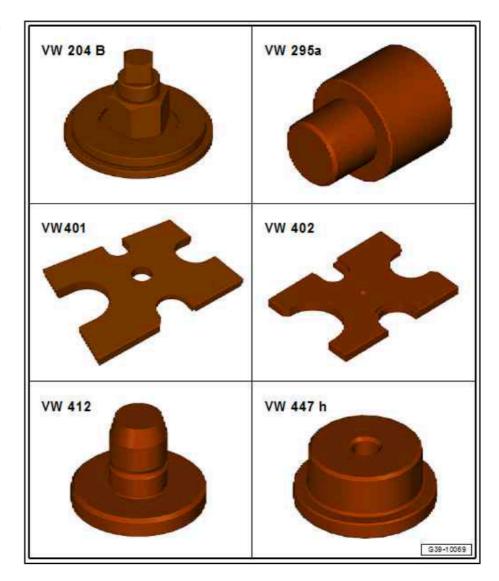


- Crankshaft seal fitting tool VW 204 B-
- Punch VW 295-
- Thrust plate VW 401-
- Thrust plate VW 402-
- Press tool VW 412-
- Thrust pad VW 447 H-



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.




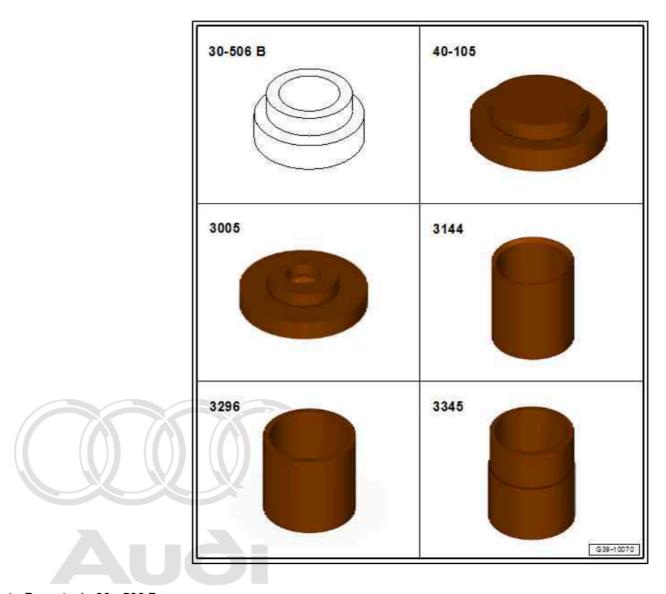

- ◆ Press tool 30 506 B
 relacted by convright. Copying for private or commercial purposes, in part or in whole, is not pewilter hnist plateed 400UI 05_AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.
 - ♦ Thrust plate 3005-
 - ♦ Sleeve 3144-
 - ♦ Tube 3296-
 - ♦ Wheel bearing tube 3345-
 - ♦ Hub grease cap puller VW 637/2-



Pressure sleeve - T10299-



Tapered roller bearing puller - V.A.G 1582-




Protected by copyright. Copying for private or co permitted unless authorised by AUDI AG. AUDI with respect to the correctness of information

- Adapter V.A.G 1582/16A-
- Adapter V.A.G 1582/17-
- Inductive heater VAS 6414-



-1- Internal puller - VAS 251 619 (Kukko 21/89)-



- -1- Internal puller VAS 6775-
- -4- Counter-support VAS 251 623 (Kukko 22/2)-
- -4- Counter-support VAS 251 625 (Kukko 22/4)-




- Secure gearbox to gearbox support ⇒ page 116.
- Remove differential ⇒ page 211 .

Pulling tapered roller bearing outer race (left-side) out of gearbox housing

- Counter-support VAS 251 623 (Kukko 22/2)-
- Internal puller 56 ... 70 mm VAS 6775-

Use internal puller - VAS 6775- so that it can be applied below outer race.

After removing, check shim for damage.




Driving tapered roller bearing outer race (left-side) into gearbox housing




Note

First insert shim in gearbox housing.



Pulling off tapered roller bearing inner race (left-side)

Before setting up the puller, place thrust plate - 40 - 105- on differential cage.



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

Pressing on tapered roller bearing inner race (left-side)

WARNING

Wear protective gloves.




Note


Support bottom of differential with press tool - 30 - 506 B- (do not apply to inner race).


Protected by copyright. Copying for private or commercial purposes, in part or in who

Heat inner race to approx 100 orc fit in position and press copyright by AUDI AG. home.



- Carefully secure differential in a vice with soft jaws -A-.
- Detach bearing cage and balls from inner race.
- Before setting up puller, place thrust pad VW 447 H- on differential cage.





Pressing on inner race of angular contact ball bearing (right-side)




WARNING

Wear protective gloves.



Note

- Support bottom of differential with press tool 30 506 B- (do not apply to inner race).
- The illustration shows an inner race for a tapered roller bearing; the procedure is identical for pressing on the inner race for an angular contact ball bearing.
- Heat inner race to approx. 100 °C, fit in position and press home.



Pressing outer race for angular contact ball bearing slightly off bearing seat



Note

To facilitate removal of the outer race for the angular contact ball bearing, heat up the cover for final drive to approx. 100 °C using the hot air blower - V.A.G 1416- .

- Then press outer race for angular contact ball bearing slightly off bearing seat by applying hub grease cap puller - VW 637/2continuously in small stages and pressing in direction of -arrow-.
- Then pull outer race for angular contact ball bearing out of final drive cover ⇒ page 219.

Pulling outer race -3- for angular contact ball bearing out of final drive cover

- Counter-support VAS 251 625 (Kukko 22/4)-
- 2 -Internal puller 56 ... 110 mm - VAS 251 619 (Kukko 21/89)-





Pressing outer race for angular contact ball bearing into final drive

- First install shim in cover for final drive.
- Press in outer race for angular contact ball bearing onto stop; larger diameter of -VW 204 B- faces towards outer race.




Note


Support cover for final drive with -3345- directly below bearing seat.

3.4 Removing and installing flange shaft (left-side)

Special tools and workshop equipment required








Drip tray for workshop hoist - VAS 6208-



Puller - T10037-




Multi-purpose tool - VW 771/1-



◆ Sealing grease for oil seals ⇒ Electronic parts catalogue

Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-. Protected by copyright. Copying for private or o
- Tilt gearbox to rear with gearbox supported T401732 to prevent G. AUD gear oil from escaping.




Unscrew bolts -arrows- on mounting bracket -1- for flange shaft (left-side).




Caution

Risk of damage to oil seal.

- ♦ If you do not keep the shaft centred when pulling it out further, the splines of the shaft -2- will fall against the inner oil seal -arrow 3- between the differential and the gearbox housing.
- If oil seal is damaged, it must be renewed ⇒ page 158.




Remove flange shaft (left-side) from gearbox in direction of

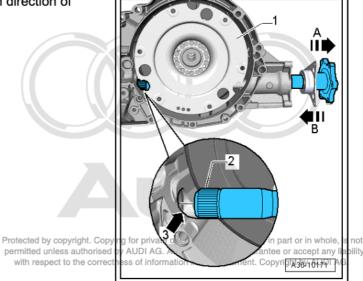



Note

- ♦ If the flange shaft (left-side) cannot be removed by hand, pull it out carefully using multi-purpose tool - VW 771-.
- To do this, secure plate of puller T10037- to flange shaft -arrows- and attach plate to spindle of multi-purpose tool - VW 771- (nuts -A-).




Remove clutch module ⇒ page 30.



Caution

Risk of damaging clutch module when removing and installing

Refer to Workshop Manual ⇒ "2.3 Removing and installing clutch module", page 30.



Installing flange shaft (left-side)

Installation is carried out in reverse order; note the following:


Thoroughly clean area of gearbox housing leading to differential -arrow A-, and oil seal -arrow B-.



Note

If oil seal for flange shaft (left-side) between differential and gearbox housing -arrow B- is damaged, it must be renewed *⇒ page 158* .


Pack space between sealing lip and dust lip half full with sealing grease for oil seals .



Thoroughly clean flange shaft (left-side)



Protected by copyright. Copying for private or commercial purposes, permitted unless authorised by AUDI AG. AUDI AG does not guarant with respect to the correctness of information in this document. Co




- Install clutch module -1- ⇒ page 30.
- Turn clutch module -1- so that you can see opening to differential -arrow 3-.
- Slide flange-shaft (left-side) -2- into gearbox in direction of -arrow B- (keep end of shaft centred while guiding it into oil seal on front final drive -arrow 3-).



Caution

Risk of damage to oil seal.

- If you do not keep the shaft centred, the splines of the shaft -2- will damage the oil seal -arrow 3- between the differential and the gearbox housing.
- If oil seal is damaged, it must be renewed ⇒ page 158.






Tighten mounting bracket -1- for flange shaft (left-side) -arrows-.

Tightening torques

⇒ "2.1 Exploded view - final drive", page 169



Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not Removing and installing flange its haft authorised by AUDI AG. AUDI AG does not guarantee or accept any liability flange in the correctness of information in this document. Copyright by AUDI AG. 3.5 (right-side)




Note

The flange shaft (right-side) can also be removed and installed with the gearbox installed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 39; Differential; Removing and installing flange shaft (right-side) .

Special tools and workshop equipment required

◆ Drift - VW 295-




♦ Puller - T10037-




Sealing grease for oil seals ⇒ Electronic parts catalogue

Removing

- Gearbox removed ⇒ 6-speed manual gearbox 0CS, 0DJ, 0CX; Rep. gr. 34; Removing and installing gearbox; Removing gearbox
- Gearbox is secured to gearbox support T40173- with tensioning strap -1-.
- Tilt gearbox to rear with gearbox support T40173- to prevent gear oil from escaping.
- Remove flange shaft (right-side); to do so, secure puller -T10037- to gearbox housing -arrow-.






Installing flange shaft (right-side).


Installation is carried out in reverse order; note the following:

- Always renew circlip for flange shaft -A-.
- Clamp flange shaft in vice, using jaw protectors. Use new circlip -A- to press old circlip out of groove in flange shaft.





- Check flange shaft oil seal (right-side) -arrow- for damage and renew if necessary ⇒ page 162.
- Pack space between sealing lip and dust lip half full with sealing grease for oil seals .
- Knock flange shaft in with drift VW 295- .





Renewing mounting bracket and ball 3.6 bearing for flange shaft (left-side)

Special tools and workshop equipment required

♦ Thrust plate - VW 401-



♦ Thrust plate - VW 402-




with respect to the correctness of information in this document. Copyright by AUDI AG.


Press tool - VW 412-




♦ Tube - VW 516-



- Remove flange shaft (left-side) ⇒ page 219 .
- Remove circlip -1- from flange shaft.




Press ball bearing -A- off flange shaft.

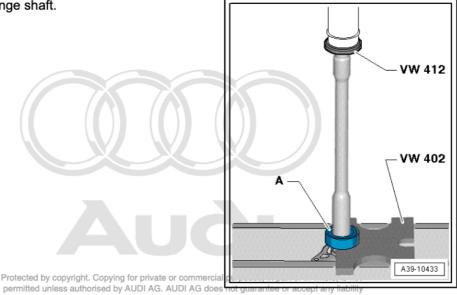


Fit new mounting bracket -1-.


- Installation position: side with lettering faces towards flange for drive shaft.
- Fit new ball bearing -2-.

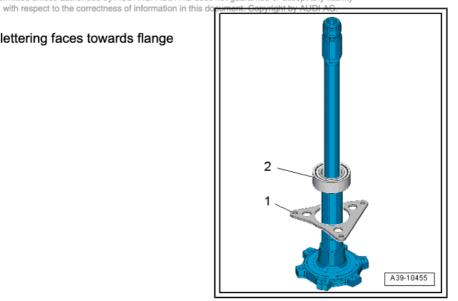

With mounting bracket -B- installed, press on ball bearing -A- as far as stop.



- Fit circlip -1- in annular groove on flange shaft.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

4 Four-wheel drive coupling

⇒ "4.1 Exploded view - four-wheel drive coupling", page 228

⇒ "4.2 Removing and installing four-wheel drive coupling", page 229

Exploded view - four-wheel drive cou-4.1 pling

For extensive information on the four-wheel drive coupling -1-, refer to ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling .

1 - Four-wheel drive coupling	W/ //
 Removing and installing ⇒ page 229 	1 2 3 4 5
Servicing ⇒ Rear final drive; Rep. gr. 39; Four- wheel drive coupling	
□ Checking ATF level ⇒ Rear final drive; Rep. gr. 39; Four-wheel	
Protecte drive coupling Checks or c permitteing fluid level by AUDI AG. AUD with respect to the correctness of information	Immercial purpo
2 - Breather	In this doc
3 - Bolt	
□ M8X70	
□ 3x	
□ Renew after removing□ 8 Nm + 180°	
4 - Damper weight	
☐ Depending on version	
5 - Bolt	
Depending on version	
☐ 28 Nm	
□ Self-locking	
Renew	
 Clean thread in four- wheel drive coupling us- ing thread tap 	
6 - Bolt	
Depending on version	
☐ 28 Nm	14 13 12 11 10 9 8 7 6
□ Self-locking	
☐ Renew	
	el drive coupling using thread tap
7 - Heat shield	
☐ For propshaft	
Depending on version	

8 - Heat shield

☐ For all-wheel drive control unit

Depending on version

- 9 Bolt
 - Depending on version
 - □ 8 Nm
- 10 Bolt
 - M8X100
 - Renew after removing
 - □ 8 Nm +180°
- 11 O-ring
 - ☐ For all-wheel drive control unit
 - Renew after removing
- 12 O-ring
 - ☐ For all-wheel drive control unit
 - Renew after removing
- 13 All-wheel drive control unit J492-

The following are integrated in the all-wheel drive control unit:

- Clutch actuator for all-wheel drive V622-
- Clutch position sender for all-wheel drive G969-
 - Removing and installing ⇒ Rear final drive; Rep. gr. 39; Four-wheel drive coupling; Removing and installing control unit
- 14 Bolt
 - □ 21 Nm

4.2 Removing and installing four-wheel drive coupling

Removing

- Gearbox removed
- Refer to general repair instructions ⇒ page 5.
- Unscrew bolts -arrows- and detach four-wheel drive coupling from gearbox.


Installing

Installation is carried out in reverse order; note the following:


Tightening torques ⇒ "4.1 Exploded view - four-wheel drive coupling", page 228




Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



- Check O-ring -1- on four-wheel drive coupling input shaft -2for damage and renew if necessary.
- Apply a very thin coating of sealing grease G 052 128 A1- to splines of four-wheel drive coupling input shaft.



- Fit four-wheel drive coupling -1- on gearbox and tighten bolts -arrows- hand-tight.
- Tighten bolts -arrows- alternately and diagonally to specified torque.





Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.